


# BI-FLEX

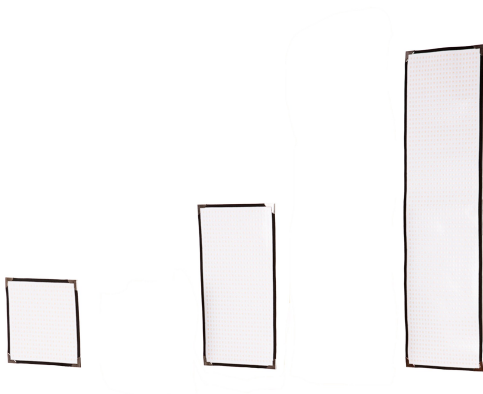

## BI-FLEX1

- 50W LED
- Bi-Color
- Super high CRI
- 1'x1'x1/4"
- 1700lux/1m
- 12-15 Volt
- Dimming 5-100%
- Flexible
- Flicker-free

## BI-FLEX2

- 100W LED
- Bi-Color
- Super high CRI
- 2'x1'x1/4"
- 4000lux/1m
- 12-30 Volt
- Dimming 5-100%
- Flexible
- Flicker-free

## BI-FLEX4

- 200W LED
- Bi-Color
- Super high CRI
- 4'x1'x1/4"
- 6000lux/1m
- 12-30 Volt
- Dimming 5-100%
- Flexible
- Flicker-free

Light Source: Super High CRI Power LED's (50W)  
 Color temperature: 2900K – 6400K  
 Beam Angle: 140°  
 Dimmer: Dimming: (5% – 100%)  
 Cooling: Passive Cooling  
 Panel Dimensions: 1' x 1' x 1/4"  
 Panel Weight: 7.3 ounces  
 Dimmer Input: 12V to 15V  
 Power Unit: Automatic Voltage 100V – 240V  
 Certification: CE approved

Dimmer unit

Additional V-Mount plate



In the kit box: BI-FLEX1 panel, Diffuser, Dimmer unit, Stand-Mount, X-bend holder, Power supply, Extension cable, Manual

Light Source: Super High CRI Power LED's (100W)  
 Color temperature: 2900K – 6400K  
 Beam Angle: 140°  
 Dimmer: Dimming: (5% – 100%)  
 Cooling: Passive Cooling  
 Panel Dimensions: 2' x 1' x 1/4"  
 Panel Weight: 13.2 ounces  
 Dimmer Input: 12V to 30V  
 Power Unit: Automatic Voltage 90V – 260V  
 Certification: CE approved

Dimmer unit with V-Mount adapter



In the kit box: BI-FLEX2 panel, Diffuser, Dimmer with V-Mount adapter and DMX, Stand-Mount, X-bend holder, Power supply, Extension cable, Manual

Light Source: Super High CRI Power LED's (200W)  
 Color temperature: 2900K – 6400K  
 Beam Angle: 140°  
 Dimmer: Dimming: (5% – 100%)  
 Cooling: Passive Cooling  
 Panel Dimensions: 4' x 1' x 1/4"  
 Panel Weight: 1 pound, 8.2 ounces  
 Dimmer Input: 12V to 30V  
 Power Unit: Automatic Voltage 90V – 260V  
 Certification: CE approved

Dimmer unit with V-Mount adapter



In the kit box: BI-FLEX4 panel, Diffuser, Dimmer with V-Mount adapter and DMX, Frame with 16mm stud, Power supply, Extension cable, Manual

	60cm/2ft	1m/3ft	2m/6ft	3m/9ft	CRI
<b>Aladdin BI-FLEX1</b>					
6000K	4200lux	1600lux	450lux	210lux	98
4200K	4600lux	1700lux	500lux	230lux	97
3000K	3400lux	1200lux	340lux	170lux	97
<b>Aladdin BI-FLEX2</b>					
6000K	8300lux	4000lux	1290lux	450lux	98
4200K	7000lux	3200lux	900lux	420lux	97
3000K	5500lux	2200lux	640lux	320lux	97
<b>Aladdin BI-FLEX4</b>					
6000K	11000lux	6000lux	1800lux	840lux	98
4200K	10000lux	5500lux	1700lux	800lux	97
3000K	8300lux	4200lux	1400lux	700lux	97



Dimmer unit for BI-FLEX2 and BI-FLEX4



Kit Case (for 3 units)

AMS-FL50BI3KITCASE



BI-FLEX1 Soft Box


AMS-FL50BI SBX



4x4 Frame

AMS-4X4FRAME

# A-LITE & EYE-LITE

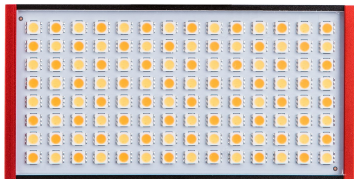


## A-LITE (Bi-Color)

- 8W LED
- Bi-Color
- Super high CRI
- 6" x 3" x 1/2"
- 230lux/1m
- Dimming 5-100%
- Micro USB charging
- Lightweight & portable
- Flicker-free

## EYE-LITE (Bi-Color)

- 2W LED
- Bi-Color
- Super high CRI
- 3.5" x 1.5" x 1/2"
- Dimming 5-100%
- Micro USB charging
- Lightweight & portable
- Flicker-free



Light Source:	Super high CRI Power LED's (8W)
Color temperature:	3250K – 5600K
CRi:	92ra (Tungsten) / 97ra (Daylight)
Beam Angle:	140°
Driver:	Flicker-Free by CC driver (efficiency>93%)
Dimmer:	Dimming: (5% – 100%)
Cooling:	Passive Cooling
Dimensions:	156 x 80 x 11.5mm
Weight:	7.2 ounces
Housing material:	Aluminium 6061 T6 (Aircraft grade)
Power Input:	Micro USB 3.6V
Battery:	3.7V 2.5A Lithium-ion battery
Mounting:	1/4-20" Screw
Certification:	CE approved
In the box:	A-LITE, Diffuser filter, USB cable



Light Source:	Super high CRI Power LED's (2W)
Color temperature:	2900K – 6400K
CRi:	97ra (Tungsten) / 95ra (Daylight)
Driver:	Flicker-Free by CC driver (efficiency>93%)
Dimmer:	Dimming: (5% – 100%)
Cooling:	Air convection
Dimensions:	3 1/2" x 1 1/2" x 1/2"
Weight:	2 ounces
Housing material:	Aluminium 6061 T6 (Aircraft grade)
Power Input:	Micro USB 3.6V
Mounting:	1/4-20" Screw
Certification:	CE approved
In the box:	EYE-LITE (Bi-Color), USB cable

Also available:

Daylight only

Tungsten only



Leather Belt Pouch  
AMS-POUCH



Shoe Mount  
AMS-02SHOE



Magnet 1/4 Screw  
AMS-02-MAG



Clamp with Ball Head  
AMS-FL40CLAMPPBH



Tilting Holder  
AMS-02 1/4TH



Phone Clip  
AMS-02CLIP