

Bright Xbaby LED fresnel

The Xbaby fresnel is a small and compact, fanless LED fresnel with integrated barndoor and tuneable colour temperature. The Xbaby has very good TLCI 98 and CRI 95 values, which makes it perfect for broadcast and TV-studios, and on smaller theatre and concert stages as well. With its modern stealth design, fanless operation and tuneable colour temperature, the Xbaby Fresnel is suitable for almost every application where a small fixture is needed.

Product code:
666626

Product Name:
Bright Xbaby Led Fresnel TW, Black body, Powercon

MAIN FEATURES


- High CRI/TLCI tunable white led-engine 2700-5700K
- Flicker free high speed PWM 16-bit dimming
- Fresnel zoom optics 20-55 °
- Fanless, silent operation
- Integrated rotatable barndoor
- Integrated gel-clips
- Easy and intuitive local menu structure
- Firmware cloning from fixture to fixture via DMX
- Stealth design: All black parts, (body, yoke, hook clamp & bolt)
- Compact size, low weight and power consumption

Creative Technology Norway AS
Brugata 19
0186 OSLO
Norway

VAT
Phone Number.
E-mail.
Web.

979 144 695
+47 22 11 30 30
webshop@ct-group.com
www.ct-norway.com


**CREATIVE
TECHNOLOGY**
NEP Live Events

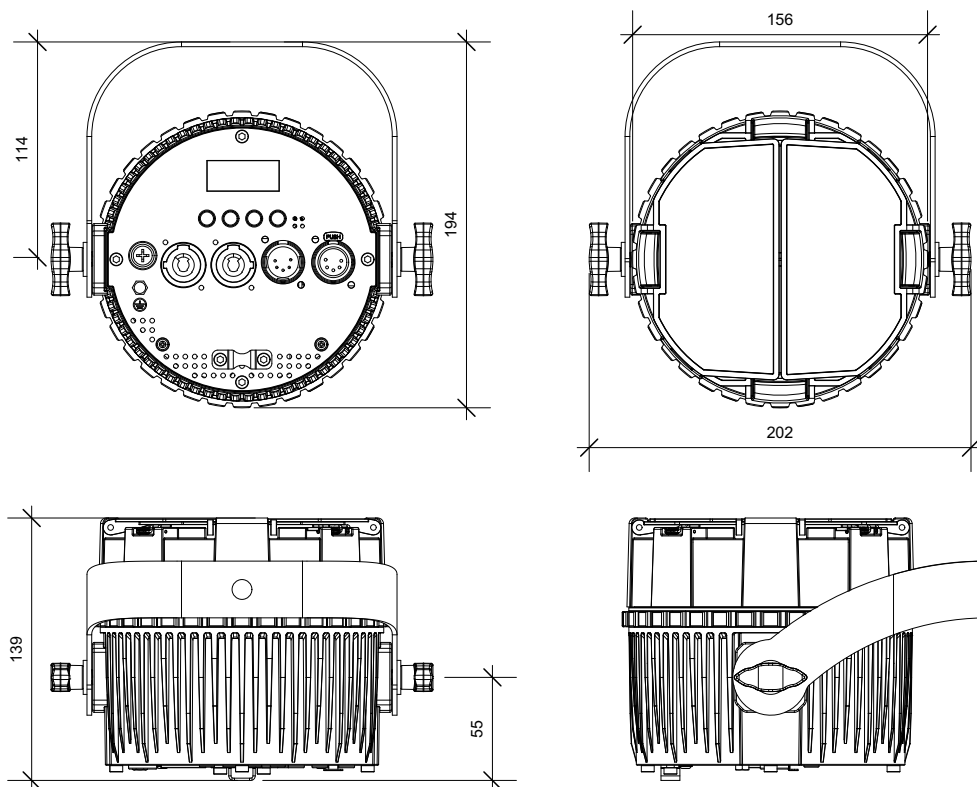

TECHNICAL SPECIFICATIONS

- **Housing:** Black Die-cast Aluminium Body
- **Cooling System:** Passive fanless, Temperature protection
- **Power Input/Output:** Neutrik Powercon
- **DMX Input/Output:** 5-pin XLR
- **Display:** Blue/white Backlit LCD, auto-dimmed when idle
- **Dimension (LxWxH):** 139 x 202 x 193 mm
- **Weight:** 2.3kg
- **Power supply:** 100-240V AC, 50/60 Hz
- **Power consumption:** Max 75W
- **LED Driver:** Constant Current Driver, 2940Hz (Flicker Free)
- **Fuse:** T2A , 250V
- **Light Source:** COB tuneable white 2700->5700K
- **CRI 95, TLCI 98**
- **Fixture Lumen:** 1500 lumen @ 55°
- **Beam Angle:** 20°-55°

TECHNICAL SPECIFICATIONS

- RF Radio Remote
- RDM remote addressing
- DMX controlled rise-time
- **Control Modes:** DMX512, RF, RDM, Manual, Master/Slave
- **DMX Channels:** 1/2/3/5CH
- **Temperature:** Max ambient temperature Ta: 40°C
- **Max housing temperature:** Tc (steady state): 80°C
- **Min. distance from flammable surfaces:** 0.5 m
- **Min. distance to lighted object:** 0.1 m
- **Compliance:**
- **LVD:** EN60598-2-17:1989+A2:1991, EN60598-1:2008+A11:2009
- **EMC:** EN55015:2006+A1:2007+A2:2009, EN61547:2009, EN61000-3-2:2006+A12009+A2:2009, EN61000-3-1:2008

INCLUDED ITEMS

666918	Bright Xline shuko -powercon cable 1,25mTüV approved
666615	Bright HOOK CLAMP, black, SWL 75kg, TüV approved

ACCESSORIES

Hybrid cables

673893	Hybrid cable PowerCon/DMX XLR5P 1m
673916	Hybrid cable PowerCon/DMX XLR5P 3m
673938	Hybrid cable PowerCon/DMX XLR5P 5m
673950	Hybrid cable PowerCon/DMX XLR5P 10m
673961	Hybrid cable PowerCon/DMX XLR5P 15m

671521	Safety cable 70cm, 3mm wire black
--------	-----------------------------------

Flightcases

666659	Bright Xbaby Flightcase for 6 Xbaby
666648	Bright Xbaby Flightcase for 10 Xbaby

666693	Bright Xbaby Xremote Xline
--------	----------------------------