

Bright Xbar



Bright Xbar is a LED bar, designed for effect lighting, flood lighting, color washing, audienceblinder etc. Each LED can be controlled individually. This gives you unlimited possibilities for effect lighting on small and large stages. Xbar has a simple user interface, powerful deep colors, high brightness and zero fan noise. Hook clamps and True1 cable are included.




Product code:
666705

Product Name:
Bright Xbar 12x12W 6in1 RGBWAUV Xline

MAIN FEATURES

- High output 12x12w 6in1 RGBWAUV pixel-controlled LED drivers
- 30 ° even spread
- Industry standard 5pin XLR and powerCON TRUE 1
- Inputs and outputs for easy chain connection
- 16bit DMX control
- DMX controlled rise time
- RDM remote-controlled addressing
- Simple and intuitive local menu structure and rotatable display
- Firmware cloning from spotlight to spotlight
- Intelligent hanger design enables floor mounting and suspension in pipes / cable without off and on mounting of hook
- Passive cooling, no fan noise
- Manual and light table profiles, easily accessible via qr code on the headlight
- Stealth design: All parts in black, (chassis, hoop, suspension hook & bolt)
- Automatic dimming of LCD taillights



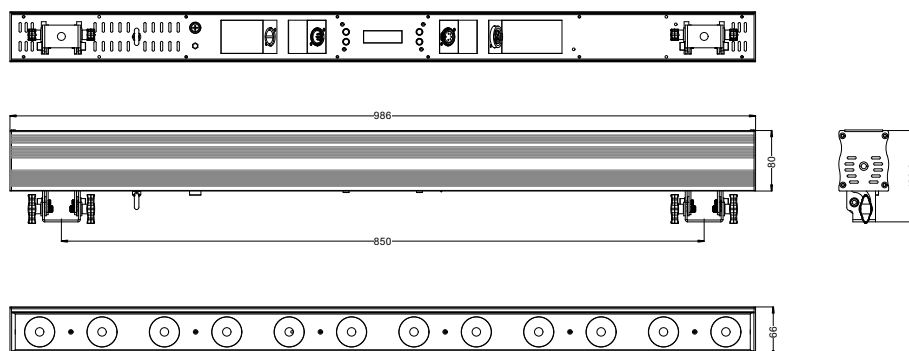


TECHNICAL SPECIFICATIONS

- **Housing :**Black Die-cast Aluminum Body, Iron Yoke
- **Cooling System:** Passive fanless, Temperature protection
- **Power:** Input/Output Neutrik Powercon TRUE1
- **DMX:** Input/Output 5-pin XLR
- **Display:** Blue/white Backlit LCD, auto-dimmed when idle.
- **Dimension:** (LxWxH) 985 x 65 x 168 mm
- **Weight:** 4.3kg (clamps included)
- **Power supply:** 100-240V AC, 50/60 Hz
- **Power consumption:** 150W, 0.9A@120V 0.65A@230V
- **LED Driver:** Constant Current Driver, 1280Hz (Flicker Free)
- **Fuse:** T2A , 250V
- **Light Source:** 12 pcs of 6in1 RGBWAUV 12W LED
- **Luminous Flux** 1000lux @ 3m
- **Beam/Field Angle** 30°/35°

TECHNICAL SPECIFICATIONS

- **Control Modes:** DMX512, RDM, Manual, Auto, Sound, Master/Slave
- **DMX Channels:** 2/3/12/32/60/96CH
- **Temperature:**Max ambient temperature Ta: 40°C
- **Max housing temperature:** Tc (steadystate): 80°C
- **Distance:** Min. distance from flammables surfaces: 0.5 m
- **Min. distance to lighted object:** 0.1 m
- **Compliance:**
- LVD EN60598-2-17:1989+A2:1991
- EN60598-1:2008+A11:2009
- EMC EN55015:2006+A1:2007+A2:2009
- EN61547:2009
- EN61000-3-2:2006+A12009+A2:2009
- EN61000-3-3:2008
- LVD: EN60598-2-17:1989+A2:1991
- EN60598-1:2008+A11:2009
- EMC: EN55015:2006+A1:2007+A2:2009
- EN61547:2009
- EN61000-3-2:2006+A12009+A2:2009
- EN61000-3-3:2008

PHOTOMETRICS

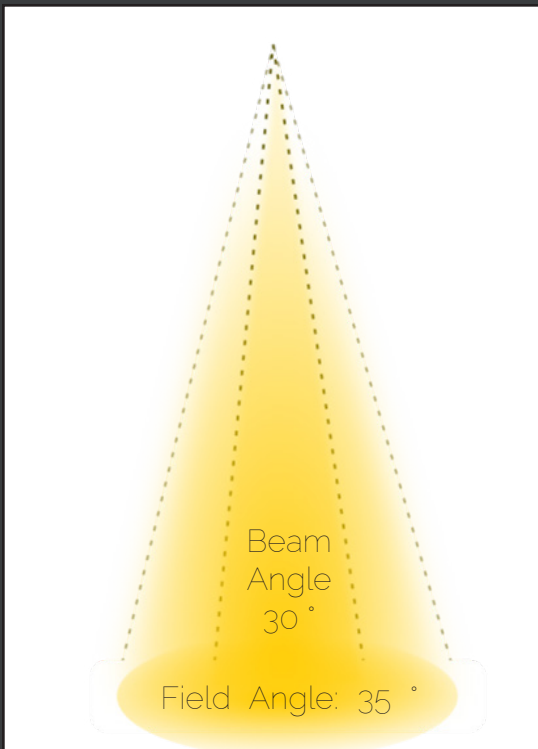

lux	R	G	B	W	A	UV	ALL
1M	913	1164	1157	1706	673	290	5180
2M	375	486	468	678	257	116	2050
3M	190	250	250	351	135	59	1067
4M	119	156	154	219	89	36	660
5M	87	113	109	158	67	26	471

INCLUDED ITEMS

831271	Bright Xline shuko -PowerconTrue1 cable 1,25m1,25mTüV approved
666615	Two Bright HOOK CLAMPS, black, SWL 75kg, TÜV

ACCESSORIES

Hybrid cables

674030	Hybrid cable PowerConTrue1/DMX XLR5P 1m
674030	Hybrid cable PowerConTrue1/DMX XLR5P 2m
674041	Hybrid cable PowerConTrue1/DMX XLR5P 3m
674063	Hybrid cable PowerConTrue1/DMX XLR5P 5m
674074	Hybrid cable PowerConTrue1/DMX XLR5P 10m
843780	Hybrid cable PowerConTrue1/DMX XLR5P 15m
671521	Safety cable 70cm, 3mm wire black

Flightcase

666716	Bright Xbar Flightcase for 6 Xbar
--------	-----------------------------------

Creative Technology Norway AS
Brugata 19
0186 OSLO
Norway

VAT
Phone Number.
E-mail.
Web.

979 144 695
+47 22 11 30 30
webshop@ct-group.com
www.ct-norway.com

CREATIVE
TECHNOLOGY
NEP Live Events