

Bright Xled FX - Strobe

Xled FX is a powerful and compact 150W LED strobe with incredible power. Xled FX can be hung up or placed on the floor without unscrewing the included hook clamp.

Hook clamp and powercon-shuko cable are included.

Product code:
666895

Product Name:
Bright Xled FX 150W LED strobe Xline

MAIN FEATURES


- High Output 150W 9 zone SMD 5600K led-engine
- 110° wide angle Blinder Strobe
- Industry standard 5pin XLR and PowerCon
- Inputs and outputs for easy daisy-chaining.
- DMX controlled rise-time
- RDM remote addressing
- Easy and intuitive Local menu structure.
- Firmware cloning from fixture to fixture
- Intelligent yoke-design enables direct floor-mount without removal of hook clamp.
- Stealth design: All black parts, (body, yoke, hook clamp & bolt),
- Automatic dimming of LCD backlight.
- Compact size, low weight and power consumption

Bright Norway AS
Brugata 19
1086 OSLO
Norway

VAT
Phone Number.
E-mail.
Web.

979 144 965
+47 22 11 30 30
webshop@ct-group.com
www.ct-norway.com


**CREATIVE
TECHNOLOGY**
NEP Live Events

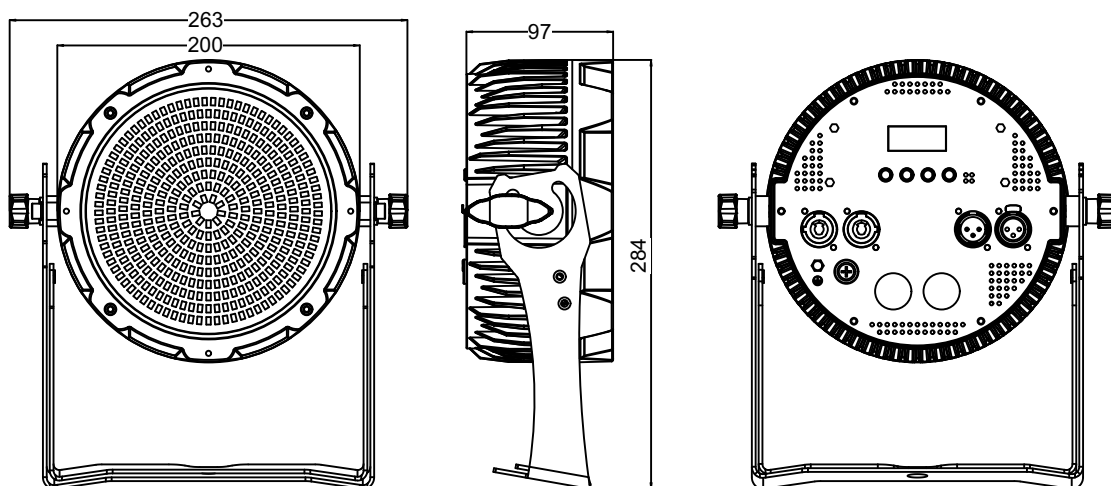

TECHNICAL SPECIFICATIONS

- **Housing:** Black Die-cast Aluminum Body, Iron Yoke
- **Cooling:** Passive fanless, Temperature protection
- **Power:** Input / Output Neutrik Powercon
- **DMX Input / Output** 5-pin XLR
- **Display:** Blue / white Backlit LCD, auto-dimmed when idle.
- **Size:** (LxWxH) 102 x 263 x 287 mm
- **Weight:** 3.4kg (clamp included)
- **Power supply:** 100-240V AC, 50/60 Hz
- **Power consumption:** 150W,, 1.25A@120V 0.65A@230V
- **LED Driver:** Constant Current Driver, 1280Hz (Flicker Free)
- **Fuse:** T2A, 250V
- **Light Source:** 405 x SMD 5600k CRI85
- **Luminous Flux** tba
- **Beam / Field Angle:** 100 ° / 120 °

TECHNICAL SPECIFICATIONS

- **control Modes:** DMX512, RDM, Manual, Auto, Sound, Master/Slave
- **DMX kanaler:** 2/4/14CH
- **Temperatur:** Max ambient temperature Ta: 40°C
- **Max housing temperatur:** Tc (steadystate): 80°C
- **Avstand:** Min. avstand frabrennbart materiale: 0.5 m, Min. avstand to lighted object: 0.1 m
- **Compliance:**
- **LVD:** EN60598-2-17:1989+A2:1991
- **EN60598-1:2008+A11:2009**
- **EMC:** EN55015:2006+A1:2007+A2:2009
- **EN61547:2009**
- **EN61000-3-2:2006+A12009+A2:2009**
- **EN61000-3-3:2008**

INCLUDED ITEMS

Hybrid cables

666918	Bright Xline shuko -powercon cable 1,25mTüV approved
666615	Bright HOOK CLAMP, black, SWL 75kg, TüV approved

ACCESSORIES

Hybrid cables

673893	Hybrid cable PowerCon/DMX XLR5P 1m
673916	Hybrid cable PowerCon/DMX XLR5P 3m
673938	Hybrid cable PowerCon/DMX XLR5P 5m
673950	Hybrid cable PowerCon/DMX XLR5P 10m
673961	Hybrid cable PowerCon/DMX XLR5P 15m

671521	Safety cable 70cm, 3mm wire black
671521	Bright Xled Barndoor Xline

Flightcases

666862	Bright Xled Flightcase 80x60x45 for 10 Xled Xline
--------	---