



Bright Xled TW- Tunable white

Xled TW is suitable for headlights on small and medium-sized venues. Ideal for small and medium venues, TV and broadcast studios. Xled TW has adjustable color temperature from approx. 2700-5600K and high CRI.

Designed for quick and easy mounting. Passive cooling, no fan noise.



Product code:
666907

Product Name:
Bright Xled TW 2700-5600K 12x 8W CRI 85+ Xline

MAIN FEATURES

- High Output 12x12w 6in1 RGBWAUV led-engine
- Flicker free high speed PWM 16-bit dimming
- Beam/Field angle 22°/35°
- Industry standard 5pin XLR and PowerCon
- Inputs and outputs for easy daisy-chaining.
- RDM remote addressing
- DMX controlled rise-time
- Easy and intuitive Local menu structure.
- Firmware cloning from fixture to fixture via DMX
- Intelligent yoke-design enables direct floor-mount without removal of hook clamp.
- Stealth design: All black parts, (body, yoke, hook clamp & bolt),
- Automatic dimming of LCD backlight.
- Compact size, low weight and power consumption




Creative Technology Norway AS
Brugata 19
0186 OSLO
Norway

VAT
Phone Number.
E-mail.
Web.

979 144 695
+47 22 11 30 30
webshop@ct-group.com
www.ct-norway.com


**CREATIVE
TECHNOLOGY**
NEP Live Events

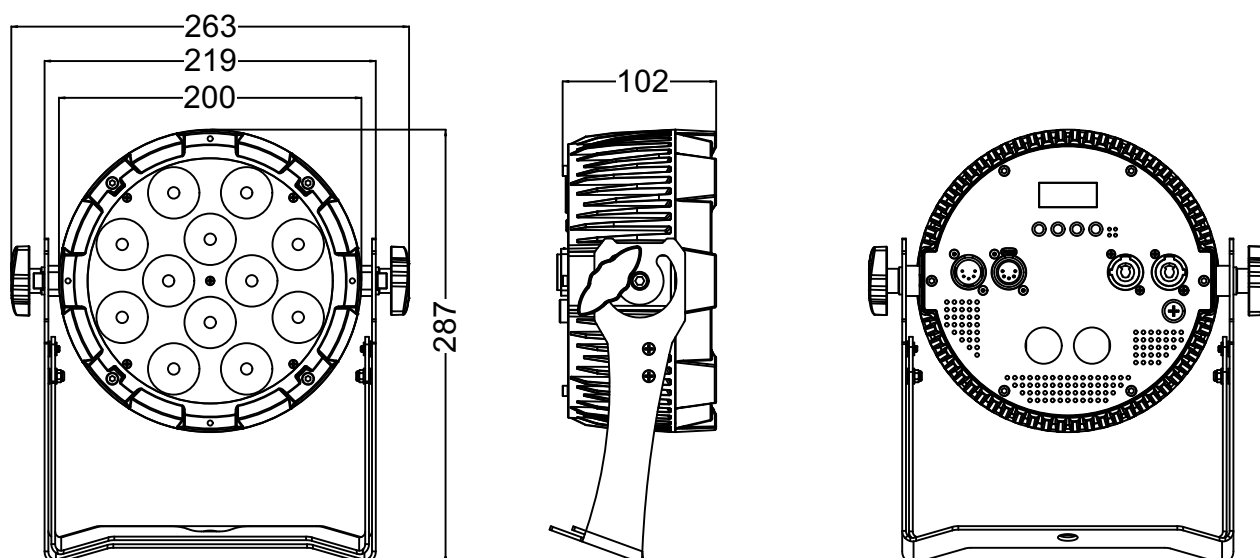

TECHNICAL SPECIFICATIONS

- Chassis: Black Die-cast Aluminum housing, Steel bar Cooling system: Passive fanless, Temperature protection
- Power: Input / Output Neutrik Powercon
- DMX: Input / Output 5-pin XLR
- Display Blue / white Backlit LCD, auto-dimmed when idle.
- Dimensions: (LxWxH) 102 x 263 x 287 mm
- Weight: 3.4kg (clamp included)
- Power supply 100-240V AC, 50/60 Hz
- Power consumption: 98W, 0.9A@120V 0.5A@230V
- LED Driver Constant Current Driver, 2940Hz (Flicker Free)
- Fuse: T2A, 250V
- Light source: 12 pcs of 2in1 wWcW 8W LED
- Beam / Field radiation angle 22 ° / 35 °

TECHNICAL SPECIFICATIONS

- TemperatureMaxambienttemperatureTa:40°C
- MaximumchassistemperatureTc(steadystate):80°CMin.distancefromcombustiblesurface:0.5m
- My. distance to illuminated object: 0.1 m
- Compliance:
- LVD: EN60598-2-17:1989+A2:1991
- EN60598-1:2008+A11:2009
- EMC: EN55015:2006+A1:2007+A2:2009
- EN61547:2009
- EN61000-3-2:2006+A12009+A2:2009
- EN61000-3-3:2008


Creative Technology Norway AS
Brugata 19
0186 OSLO
Norway

VAT
Phone Number.
E-mail.
Web.

979 144 695
+47 22 11 30 30
webshop@ct-group.com
www.ct-norway.com

CREATIVE
TECHNOLOGY
NEP Live Events

PHOTOMETRICS

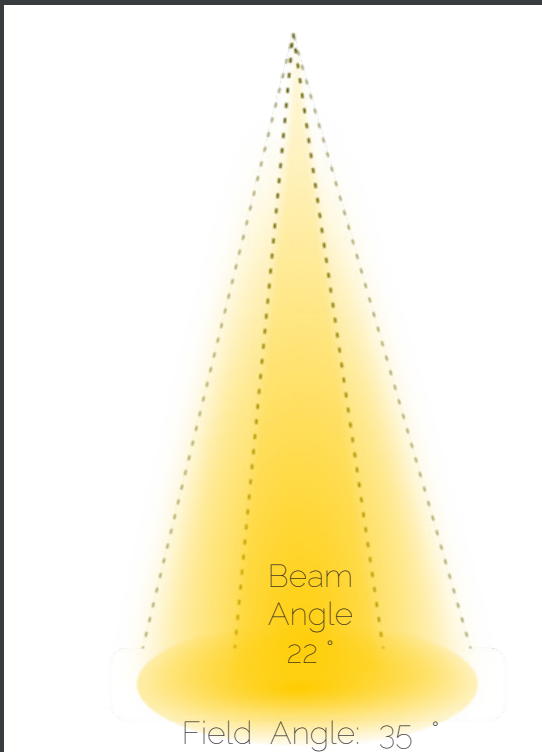

Center lux (tba)	Cool	Warm	C+W
1M			
2M			
3M			
4M			
5M			

INCLUDED ITEMS

666918	Bright Xline shuko - powercon cable 1,25mTüV approved
666615	Bright HOOK CLAMP, black, SWL 75kg, TÜV approved

ACCESSORIES

Hybrid cables

673893	Hybrid cable PowerCon/DMX XLR5P 1m
673916	Hybrid cable PowerCon/DMX XLR5P 3m
673938	Hybrid cable PowerCon/DMX XLR5P 5m
673950	Hybrid cable PowerCon/DMX XLR5P 10m
673961	Hybrid cable PowerCon/DMX XLR5P 15m
671521	Safety cable 70cm, 3mm wire black
666851	Bright Xled Barndoor Xline

Flightcase

666862	Bright Xled Flightcase 80x60x45 for 10 Xled Xline
--------	---

Creative Technology Norway AS
Brugata 19
0186 OSLO
Norway

VAT
Phone Number.
E-mail.
Web.

979 144 695
+47 22 11 30 30
webshop@ct-group.com
www.ct-norway.com