



# Bright Xled RGBW

This is the original Xled, with 12x8W RGBW. The Xled provides powerful colors and a cost effective and budget friendly LED wash.

Xled is suitable for small and medium-sized venues. Perfect for color washing and decorative lighting. Designed for quick and easy mounting. Passive cooling, no fan noise.



Product code:  
666794

Product Name:  
Bright Xled 12x8W RGBW LED Wash BLK Xline

## MAIN FEATURES

- High Output 12x8w 4in1 RGBW led-engine
- Flicker free high speed PWM dimming
- Industry standard 5pin XLR and PowerCon
- Inputs and outputs for easy daisy-chaining.
- Intelligent yoke-design enables direct floor-mount without removal of hook clamp.
- Stealth design: All black parts, (body, yoke, hook clamp & bolt),
- Automatic dimming of LCD backlight.
- Compact size, low weight and power consumption




**Creative Technology Norway AS**  
Brugata 19  
0186 OSLO  
Norway

VAT  
Phone Number.  
E-mail.  
Web.

979 144 695  
+47 22 11 30 30  
[webshop@ct-group.com](mailto:webshop@ct-group.com)  
[www.ct-norway.com](http://www.ct-norway.com)

  
**CREATIVE  
TECHNOLOGY**  
NEP Live Events

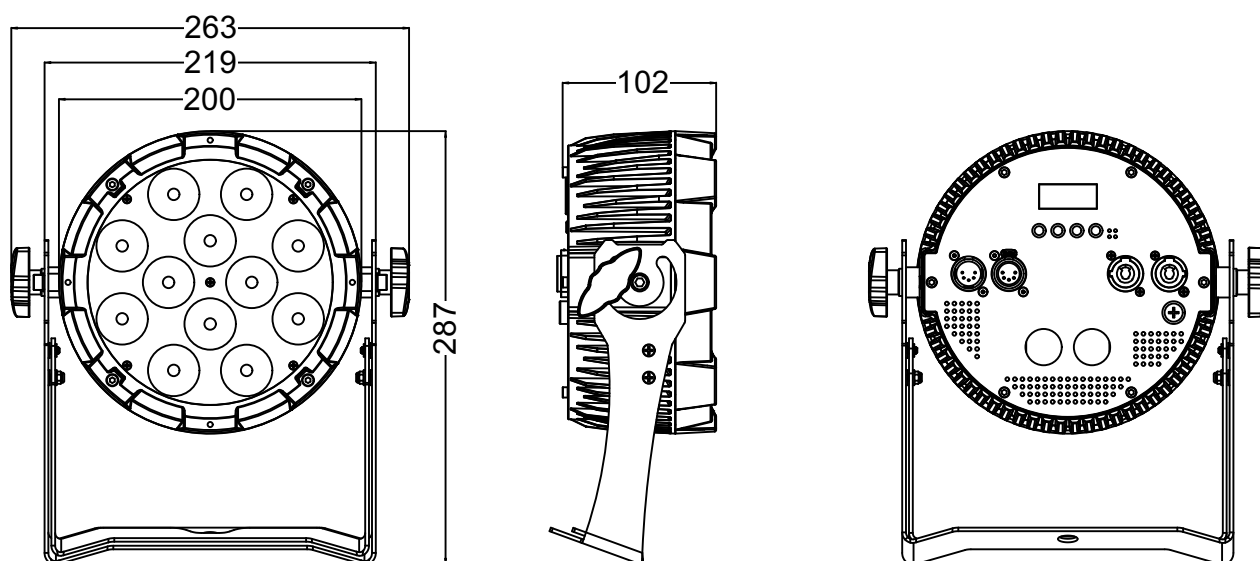


#### TECHNICAL SPECIFICATIONS

- Housing Black Die-cast Aluminum Body, Iron Yoke
- Cooling System Passive fanless, Temperature protection
- Power Input/Output Neutrik Powercon
- DMX Input/Output 5-pin XLR
- Display Blue/white Backlit LCD, auto-dimmed when idle.
- Dimension (LxWxH) 102 x 263 x 287 mm
- Weight 3.4kg (clamp included)
- Power supply 100-240V AC, 50/60 Hz
- Power consumption 98W, 0.9A@120V 0.5A@230V
- LED Driver Constant Current Driver, 2940Hz (Flicker Free)
- Fuse T2A , 250V
- Light Source 12 pcs of 4in1 RGBW 8W LED
- Luminous Flux (1m) R3957,G3900,B4690, W6000, RGBW15740
- Beam/Field Angle 22°/35°

#### TECHNICAL SPECIFICATIONS

- Control Modes DMX512, Static Color, Auto, Sound, Master/Slave
- DMX Channels 3/4/6/9CH
- Temperature Max ambient temperature Ta: 40°C
- Max housing temperature Tc (steady state): 80°C
- Distance Min. distance from flammable surfaces: 0.5 m
- Min. distance to lighted object: 0.1 m
- Compliance:
- LVD: EN60598-2-17:1989+A2:1991
- EN60598-1:2008+A11:2009
- EMC: EN55015:2006+A1:2007+A2:2009
- EN61547:2009
- EN61000-3-2:2006+A1:2009+A2:2009
- EN61000-3-3:2008

## PHOTOMETRICS

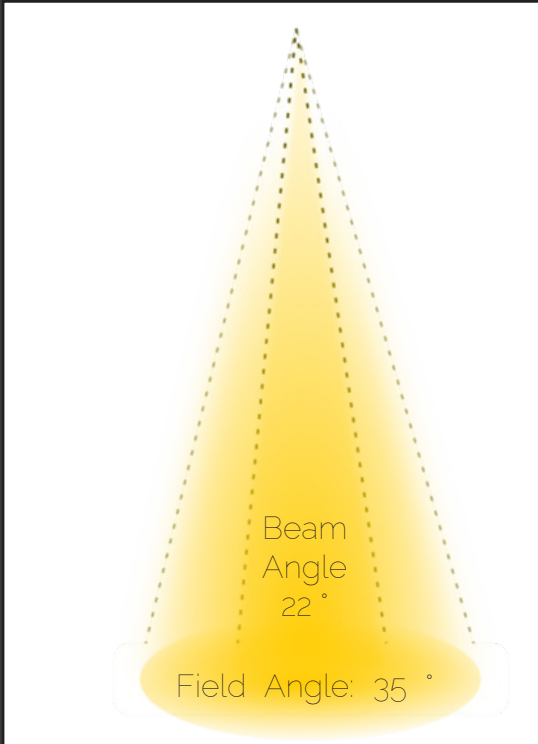

Center lux	R	G	B	W	RGBW
1M	3957	3900	4990	6000	15740
2M	977	1092	1200	1700	4310
3M	430	485	558	747	1911
4M	245	280	308	428	1056
5M	160	185	205	282	693

## INCLUDED ITEMS

666918	Bright Xline shuko - powercon cable 1,25m TÜV approved
666615	Bright HOOK CLAMP, black, SWL 75kg, TÜV approved

## ACCESSORIES

### Hybrid cables

673893	Hybrid cable PowerCon/DMX XLR5P 1m
673916	Hybrid cable PowerCon/DMX XLR5P 3m
673938	Hybrid cable PowerCon/DMX XLR5P 5m
673950	Hybrid cable PowerCon/DMX XLR5P 10m
673961	Hybrid cable PowerCon/DMX XLR5P 15m
671521	Safety cable 70cm, 3mm wire black
666851	Bright Xled Barndoor Xline

### Flightcase

666862	Bright Xled Flightcase 80x60x45 for 10 Xled Xline
--------	---

**Creative Technology Norway AS**  
Brugata 19  
0186 OSLO  
Norway

VAT  
Phone Number.  
E-mail.  
Web.

979 144 695  
+47 22 11 30 30  
webshop@ct-group.com  
www.ct-norway.com

**CREATIVE**  
TECHNOLOGY  
NEP Live Events