



DMX MODES

Tambora has five different operating modes:

Standard RGBW 8bit, Standard RGBW 16bit,
Shape RGBW, Shape RGBW 16bit
Advanced

CONTROL LAYER

- The Standard modes allow to control the fixtures general parameter and the strobe engine separately.
- The Shape mode allows user to select and manage countless type of graphic effects the background color
- The Strobe Engine allows user to control the strobe and manage countless type of graphics
- Advanced mode allows easy control with three independent overlapping layers that can operate by enable Pixels/Strobe Engine (active in 0 seconds) the users can control RGB/RGBW or Strobe simultaneously

LAYER CONCEPT

- Layer 1 Control general fixture parameters and function channel
- Layer 2 Control Shape Engine and Background engine fade colour speed transition in Dynamic or Static mode.
- Layer 2 in Shape mode can be set in Master/Slave mode
- Layer 2 and 3 in advanced mode can be set in Master/Slave mode
- Layer 3 control dimmer and strobe of pixel engine.
- Layer 4 control dimmer and strobe duration rate speed and fade of strobe engine

When a layer is set in master mode, it wins on the below layer even if the intensity is set at 0%

If a layer is set in master mode the pixel become black

If a layer is set in slave mode the layer below win

PIXEL MAPPING

- Pixel Mapping function ON (RGBW-RGB) enable Pixel Mapping engine. Function is activated in zero seconds
- CW cool white function Enable Strobe Pixel Mapping engine. Function is activated in zero seconds

DMX MODE

<i>Mode</i>	<i>Number of Parameter</i>	<i>Colour Control</i>	<i>Notes</i>
Standard RGBW	16	RGBW 8bit	Colour control in 2 layers
Standard RGBW 16bit	20	RGBW 16bit	Colour control in 2 layers
Shape RGBW	34	RGBW 8bit	Colour control in 3 layers
Shape RGBW 16bit	42	RGBW 16bit	Colour control in 3 layers.
Advanced	36	RGBW	Colour control, in 3 layers.

IMPORTANT: The Shape RGBW is the default operating mode.

PIXELS ENGINE MODE

<i>Mode</i>	<i>Number of Parameter</i>	<i>Colour Control</i>	<i>Notes</i>
Disable	-	-	Disable the colour control for each led.
RGB	12	RGB 8bit	Colour control for each led.
RGBW	16	RGBW 8bit	Colour control for each led.

STROBE ENGINE MODE

<i>Mode</i>	<i>Number of Parameter</i>	<i>Colour Control</i>	<i>Notes</i>
Disable	-	-	Disable the colour control for strobe led.
Enable	16	W 8bit	White strobe control for each led.

Functions Details

DMX Parameter	Standard RGBW	Standard RGBW 16bit	Shape RGBW
1	Layer 1 Red	Layer 1 Red	Layer 1 Red
2	Layer 1 Green	Layer 1 Red fine	Layer 1 Green
3	Layer 1 Blue	Layer 1 Green	Layer 1 Blue
4	Layer 1 White	Layer 1 Green fine	Layer 1 White
5	Layer 1 CTO	Layer 1 Blue	Layer 1 CTO
6	Master Strobe	Layer 1 Blue fine	Master Strobe
7	Master Dimmer	Layer 1 White	Master Dimmer
8	Master Dimmer fine	Layer 1 White fine	Master Dimmer Fine
9	Layer 1 Color Crossfade	Layer 1 CTO	Layer 1 Color Crossfade
10	Layer 1 Attack Fade	Master Strobe	Layer 1 Attack Fade
11	Layer 1 Release Fade	Master Dimmer	Layer 1 Release Fade
12	Layer 1 Function	Master Dimmer Fine	Layer 1 Function
13	Layer 4 Strobe Engine Strobe	Layer 1 Color Crossfade	Layer 2 Shape Selection
14	Layer 4 Strobe Engine Dimmer	Layer 1 Attack Fade	Layer 2 Shape Effect
15	Layer 4 Strobe Engine Duration	Layer 1 Release Fade	Layer 2 Indexing Speed
16	Layer 4 Strobe Engine Rate	Layer 1 Function	Layer 2 Shape Fade
17	-	Layer 4 Strobe Engine Strobe	Layer 2 Shape Strobe
18	-	Layer 4 Strobe Engine Dimmer	Layer 2 Shape Dimmer
19	-	Layer 4 Strobe Engine Duration	Layer 2 Shape Transition
20	-	Layer 4 Strobe Engine Rate	Layer 2 Background Red
21	-	-	Layer 2 Background Green
22	-	-	Layer 2 Background Blue
23	-	-	Layer 2 Background White
24	-	-	Layer 2 Background CTO
25	-	-	Layer 2 Background Strobe
26	-	-	Layer 2 Background Dimmer
27	-	-	Layer 4 Strobe Engine Strobe
28	-	-	Layer 4 Strobe Engine Dimmer
29	-	-	Layer 4 Strobe Engine Duration
30	-	-	Layer 4 Strobe Engine Rate
31	-	-	Layer 4 Strobe Effect Selection
32	-	-	Layer 4 Strobe Effect
33	-	-	Layer 4 Strobe Indexing Speed
34	-	-	Layer 4 Strobe Fade

DMX Parameter	Shape RGBW 16bit	Advanced
1	Layer 1 Red	Layer 1 Red
2	Layer 1 Red fine	Layer 1 Green
3	Layer 1 Green	Layer 1 Blue
4	Layer 1 Green fine	Layer 1 White
5	Layer 1 Blue	Layer 1 CTO
6	Layer 1 Blue fine	Layer 1 Strobe
7	Layer 1 White	Layer 1 Dimmer
8	Layer 1 White fine	Master Strobe
9	Layer 1 CTO	Master Dimmer
10	Master Strobe	Master Dimmer Fine
11	Master Dimmer	Layer 1 Color Crossfade
12	Master Dimmer Fine	Layer 1 Attack Fade
13	Layer 1 Color Crossfade	Layer 1 Release Fade
14	Layer 1 Attack Fade	Function
15	Layer 1 Release Fade	Layer 2 Selection
16	Layer 1 Function	Layer 2 Effect
17	Layer 2 Shape Selection	Layer 2 Indexing/Speed
18	Layer 2 Shape Effect	Layer 2 Fade
19	Layer 2 Shape Indexing Speed	Layer 2 Strobe
20	Layer 2 Shape Fade	Layer 2 Dimmer
21	Layer 2 Shape Strobe	Layer 2 Transition
22	Layer 2 Shape Dimmer	Layer 2 Red
23	Layer 2 Shape Transition	Layer 2 Green
24	Layer 2 Background Red	Layer 2 Blue
25	Layer 2 Background Red Fine	Layer 2 White
26	Layer 2 Background Green	Layer2 CTO
27	Layer 2 Background Green Fine	Layer 3 Strobe
28	Layer 2 Background Blue	Layer 3 Dimmer
29	Layer 2 Background Blue Fine	Layer 4 Strobe Engine
30	Layer 2 Background White	Layer 4 Strobe Engine Dimmer
31	Layer 2 Background White Fine	Layer 4 Strobe Engine Duration
32	Layer 2 Background CTO	Layer 4 Strobe Engine Rate
33	Layer 2 Background Strobe	Layer 4 Strobe Effect Selection
34	Layer 2 Background Dimmer	Layer 4 Strobe Effect
35	Layer 4 Strobe Engine	Layer 4 Strobe Indexing Speed
36	Layer 4 Strobe Engine Dimmer	Layer 4 Strobe Fade
37	Layer 4 Strobe Engine Duration	-
38	Layer 4 Strobe Engine Rate	-
39	Layer 4 Strobe Effect Selection	-
40	Layer 4 Strobe Effect	-
41	Layer 4 Strobe Indexing Speed	-
42	Layer 4 Strobe Fade	


Pixels Engine functions details

DMX Parameter	Pixels RGB Mode	Pixels RGBW Mode
1	Red Led 1	Red Led 1
2	Green Led 1	Green Led 1
3	Blue Led 1	Blue Led 1
4	Red Led 2	White Led 1
5	Green Led 2	Red Led 2
6	Blue Led 2	Green Led 2
7	Red Led 3	Blue Led 2
8	Green Led 3	White Led 2
9	Blue Led 3	Red Led 3
10	Red Led 4	Green Led 3
11	Green Led 4	Blue Led 3
12	Blue Led 4	White Led 3
13		Red Led 4
14		Green Led 4
15		Blue Led 4
16		White Led 4

DMX Parameter	Pixels STROBE Mode
1	White Led 1
2	White Led 2
3	White Led 3
4	White Led 4
5	White Led 5
6	White Led 6
7	White Led 7
8	White Led 8
9	White Led 9
10	White Led 10
11	White Led 11
12	White Led 12
13	White Led 13
14	White Led 14
15	White Led 15
16	White Led 16

Led reference number

IMPORTANT: The image refer to the fixture with the option Reverse Mapping OFF

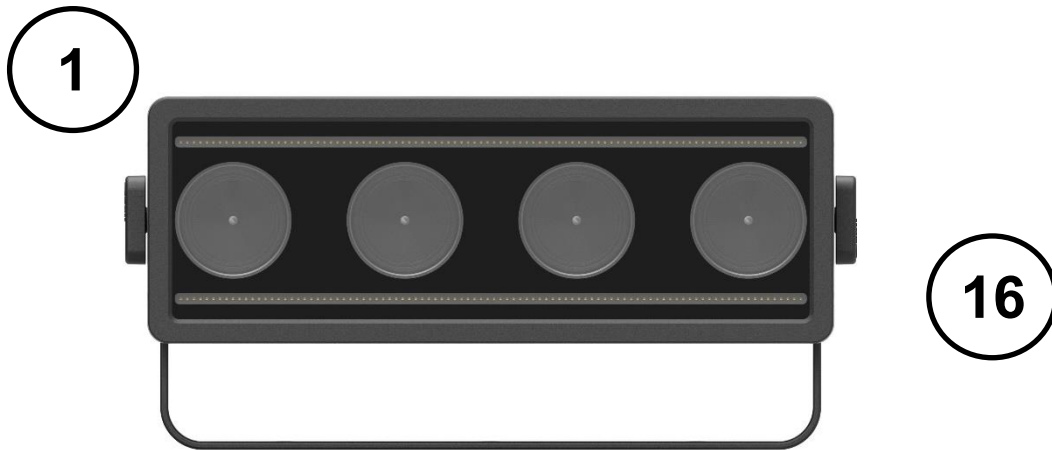

IMPORTANT: The image refer to the Led Mapping:
The blinder is based on 4pcs RGBWW Leds 100W each with reflector
The strobe is based on 192pcs white Leds individually controlled by 16 areas of 12 Leds each area divided in two strips

1	2	3	4	5	6	7	8
1		2		3		4	
9	10	11	12	13	14	15	16

Function details

Standard RGBW	Standard RGBW 16bit	Shape RGBW	Shape RGBW 16bit	DMX Default Value	Bit Value	Function
1	1	1	1	000	000 - 255	LAYER 1 RED Linear 0 – 100%
-	2	-	2	000	000 - 255	LAYER 1 RED FINE (16 Bit)
2	3	2	3	000	000 - 255	LAYER 1 GREEN Linear 0 – 100%
-	4	-	4	000	000 - 255	LAYER 1 GREEN FINE (16 Bit) fine control
3	5	3	5	000	000 - 255	LAYER 1 BLUE Linear 0 – 100%
-	6	-	6	000	000 - 255	LAYER 1 BLUE FINE (16 bit)
4	7	4	7	000	000 - 255	LAYER 1 WHITE Linear 0 – 100%
-	8	-	8	000	000 - 255	LAYER 1 WHITE FINE (16 bit) fine control
5	9	5	9	000		LAYER 1 CTO linear from 8000K to 2700K
					000 - 009	Unused range/CTO OFF
					010 - 255	8000 K - 2700 K
6	10	6	10	255		MASTER STROBE
					000 - 003	Light OFF
					004 - 103	Strobe frequency from slow (1Hz) to fast (25Hz)
					104 - 107	Light ON
					108 - 207	Pulsation from slow (0.5 Hz) to fast (25 Hz)
					208 - 212	Light ON
					213 - 225	Random Slow Strobe effect
					226 - 238	Random Medium Strobe effect
					239 - 251	Random Fast Strobe effect
252 - 255	Light ON					
7	11	7	11	000	000 - 255	MASTER DIMMER.
8	12	8	12	000	000 - 255	MASTER DIMMER FINE (16 bit)
9	13	9	13	000	000 - 255	LAYER 1 COLOR CROSSFADE Fast to Slow
10	14	10	14	000	000 - 255	LAYER 1 ATTACK FADE Fast to Slow
11	15	11	15	000	000 - 255	LAYER 1 RELEASE FADE Fast to Slow

Standard RGBW	Standard RGBW 16bit	Shape RGBW	Shape RGBW 16bit	DMX Default Value	BIT Value	Function	
12	16	12	16	000		FUNCTION	
						IMPORTANT: Setting are activated and saved holding the DMX level for three seconds.	
					000 - 001	Unused range	
					002 - 003	Auto (Default): Fans increase/decrease according to the LEDs temperature.	
					004 - 005	SLN: Fans power always at minimum range, light output change accordingly with ambient temperature.	
					006 - 007	Theatre: Fans power always at a constant range, light output constantly reduced.	
					008 - 009	Constant: Fans power at maximum range.	
					010 - 037	Unused range	
					038 - 042	Dimmer curve 1 (Default)	→Details at page 16
					043 - 047	Dimmer curve 2	
					048 - 052	Dimmer curve 3	
					053 - 055	Dimmer curve 4	
					056 - 057	Dimmer curve 5	
					058 - 062	Raw colour gamma 1	→Details at page 16
					063 - 067	Raw colour gamma 1.5	
					068 - 072	Raw colour gamma 2.2 (Default)	
					073 - 084	Unused range	
					085 - 086	Reverse mapping OFF (Default)	
					087 - 088	Reverse mapping ON	
					089 - 090	CW Reverse mapping OFF (Default)	
					091 - 092	CW Reverse mapping ON	
					093 - 097	Pixel mapping Disabled (Default)	
					098 - 102	Pixel mapping ON RGB Mode (active in 0 seconds)	
					103 - 107	Pixel mapping ON RGBW Mode (active in 0 seconds)	
					108 - 112	Red shift ON	
					113 - 117	Red Shift OFF (Default) (active in 0 seconds)	
					118 - 120	CW Engine Disable (Default) (active in 0 seconds)	
					121 - 122	CW Engine Enable	
					123 - 167	Unused range	
					168 - 188	PWM frequency=600Hz	
					189 - 199	PWM frequency=1200Hz	
					200 - 210	PWM frequency=2000Hz (Default)	
					211 - 221	PWM frequency=4000Hz	
					222 - 232	PWM frequency=6000Hz	
					233 - 243	PWM frequency=25000Hz	
244 - 248	Display OFF (Default)						
249 - 253	Display ON						
254 - 255	Default function recall						

Standard RGBW	Standard RGBW 16bit	Shape RGBW	Shape RGBW 16bit	DMX Default Value	BIT Value	Function	
If Layer 2 shape engine is active pixel not involved on pattern become black and take control from background!							
-	-	13	17	000	LAYER 2 SHAPE SELECTION		
					000 - 005	Normal	
					006 - 130	Static	
					131 - 255	Dynamic	
-	-	14	18	000	LAYER 2 SHAPE EFFECT		
					000 - 015	Effect 1	
					016 - 031	Effect 2	
					032 - 047	Effect 3	
					048 - 239	
240 - 255	Effect 16						
-	-	15	19	000	LAYER 2 SHAPE INDEXING SPEED		
					000 - 255	Indexing	If Static mode is selected on shape selection
					000 - 124	Speed from fast to slow, forward	
					125 - 130	STOP	If Dynamic mode is selected on shape selection
					131 - 255	Speed from slow to fast, backward	
-	-	16	20	000	LAYER 2 SHAPE FADE		
					000 - 005	OFF	
					006 - 130	Fade change from fast to slow	
					131 - 255	Wake change from fast to slow	
-	-	17	21	104	LAYER 2 SHAPE STROBE		
					000 - 003	Light OFF	
					004 - 103	Strobe frequency from slow (1Hz) to fast (25Hz)	
					104 - 107	Light ON	
					108 - 207	Pulsation from slow (0.5 Hz) to fast (25 Hz)	
					208 - 212	Light ON (Shape Slave)	
					213 - 225	Random Slow Strobe effect	
					226 - 238	Random Medium Strobe effect	
					239 - 251	Random Fast Strobe effect	
252 - 255	Light ON (Shape Master)						
-	-	18	22	255	0 - 255	LAYER 2 SHAPE DIMMER	
-	-	19	23	000	0 - 255	LAYER 2 SHAPE TRANSITION	
-	-	20	24	000	000 - 255	LAYER 2 BACKGROUND RED Linear 0 – 100%	
-	-	-	25	000	000 - 255	LAYER 2 BACKGROUND RED FINE	
-	-	21	26	000	000 - 255	LAYER 2 BACKGROUND GREEN Linear 0 – 100%	
-	-	-	27	000	000 - 255	LAYER 2 BACKGROUND GREEN FINE	
-	-	22	28	000	000 - 255	LAYER 2 BACKGROUND BLUE Linear 0 – 100%	
-	-	-	29	000	000 - 255	LAYER 2 BACKGROUND BLUE FINE	
-	-	23	30	000	000 - 255	LAYER 2 BACKGROUND WHITE Linear 0 – 100%	
-	-	-	31	000	000 - 255	LAYER 2 BACKGROUND WHITE FINE	
-	-	24	32	000	LAYER 2 BACKGROUND CTO from 8000K to 2700K		
					000 - 009	Unused Range/CTO OFF	
					010 - 255	8000K – 2700K	

Standard RGBW	Standard RGBW 16bit	Shape RGBW	Shape RGBW 16bit	DMX Default Value	BIT Value	Function	
-	-	25	33	255		LAYER 2 BACKGROUND STROBE	
					000 - 003	Light OFF	
					004 - 103	Strobe linear from slow (1Hz) to fast (25Hz)	
					104 - 107	Light ON	
					108 - 207	Pulsation from slow (0.5 Hz) to fast (25 Hz)	
					208 - 212	Light ON	
					213 - 225	Random Slow Strobe effect	
					226 - 238	Random Medium Strobe effect	
					239 - 251	Random Fast Strobe effect	
	252 - 255	Light ON					
-	-	26	34	255	000 - 255	BACKGROUND DIMMER	
13	17	27	35	255		LAYER 4 STROBE ENGINE	
					000 - 005	No Effect	
					006 - 042	Ramp Up	
					043 - 085	Ramp Down	
					086 - 128	Ramp Up to Down	
					129 - 171	Random	
					172 - 214	Lightning	
215 - 255	Spikes (Flash over low light)						
14	18	28	36	000	000 - 255	LAYER 4 STROBE ENGINE DIMMER	
15	19	29	37	000	000 - 255	LAYER 4 STROBE ENGINE DURATION	
16	20	30	38	000		LAYER 4 STROBE ENGINE RATE	
					000 - 005	No Effect	
					006 - 255	Pulsation from slow (0.3 Hz) to fast (25 Hz)	
-	-	31	39	000		LAYER 4 STROBE EFFECT SELECTION	
					000 - 005	Normal	
					006 - 130	Static	
	131 - 255	Dynamic					
-	-	32	40	000		LAYER 4 STROBE EFFECT	
					000 - 015	Effect 1	
					016 - 031	Effect 2	
					032 - 047	Effect 3	
					048 - 239	
	240 - 255	Effect 16					
-	-	33	41	000		LAYER 4 STROBE INDEXING SPEED	
					000 - 255	Indexing	If Static mode is selected on strobe effect selection
					000 - 124	Speed fast to slow forward, forward	If Dynamic mode is selected on strobe effect selection
					125 - 130	STOP	
	131 - 255	Speed slow to fast, backward					
-	-	34	42	000		LAYER 4 STROBE FADE	
					000 - 005	OFF	
					006 - 130	Fade change from fast to slow	
					131 - 255	Wake change from fast to slow	

Advanced	DMX Default Value	Bit Value	Function
1	000	000 - 255	LAYER 1 RED Linear 0 – 100%
2	000	000 - 255	LAYER 1 GREEN Linear 0 – 100%
3	000	000 - 255	LAYER 1 BLUE Linear 0 – 100%
4	000	000 - 255	LAYER 1 WHITE Linear 0 – 100%
5	000		LAYER 1 CTO
		000 - 009	Unused Range/CTO OFF
		010 - 255	from 8000K to 2700K
6	255		LAYER 1 STROBE
		000 - 003	Light OFF
		004 - 103	Strobe linear from slow (1Hz) to fast (25Hz).
		104 - 107	Light ON
		108 - 207	Pulsation from slow (0.5 Hz) to fast (25 Hz)
		208 - 212	Light ON
		213 - 225	Random Slow Strobe effect
		226 - 238	Random Medium Strobe effect
		239 - 251	Random Fast Strobe effect
252 - 255	Light ON		
7		000 - 255	LAYER 1 DIMMER Linear 0 – 100%
8	104		MASTER STROBE
		000 - 003	Light OFF
		004 - 103	Strobe frequency from slow (1Hz) to fast (25Hz).
		104 - 107	Light ON
		108 - 207	Pulsation from slow (0.5 Hz) to fast (25 Hz)
		208 - 212	Light ON
		213 - 225	Random Slow Strobe effect
		226 - 238	Random Medium Strobe effect
		239 - 251	Random Fast Strobe effect
252 - 255	Light ON		
9	000	000 - 255	MASTER DIMMER. Linear 0 – 100%
10	000	000 - 255	MASTER DIMMER FINE (16 bit)
11	000	000 - 255	COLOR CROSSFADE Fast to Slow
12	000	000 - 255	ATTACK FADE Fast to Slow
13	000	000 - 255	RELEASE FADE Fast to Slow
14			Same FUNCTION channel as the other DMX modes.
15	000		LAYER 2 SELECTION
		000 - 005	Normal
		006 - 130	Static
		131 - 255	Dynamic
16	000		LAYER 2 EFFECT
		000 - 015	Effect 1
		016 - 031	Effect 2
		032 - 047	Effect 3
		048 - 239
		240 - 255	Effect 16

Advanced	DMX Default Value	Bit Value	Function	
17	000		LAYER 2 INDEXING/SPEED	
		000 - 255	Indexing	If Static mode is selected on layer 2 selection
		000 - 124	Speed from fast to slow, forward	
		125 - 130	Stop	If Dynamic mode is selected on layer 2 selection
131 - 255	Speed from slow to fast, backward			
18	000		LAYER 2 FADE	
		000 - 005	OFF	
		006 - 130	Fade control on shape from fast to slow.	
		131 - 255	Wake linearly increase of pixel back and front on the selected shape.	
19	255		LAYER 2 STROBE	
		000 - 003	Light OFF	
		004 - 103	Strobe linear from slow (1Hz) to fast (25Hz).	
		104 - 107	Light ON	
		108 - 207	Pulsation linear from slow (0.5 Hz) to fast (25 Hz)	
		208 - 212	Light ON (Layer 2 Slave)	
		213 - 225	Random Slow Strobe effect	
		226 - 238	Random Medium Strobe effect	
		239 - 251	Random Fast Strobe effect	
252 - 255	Light ON (Layer 2 Master)			
20	000	000 - 255	LAYER 2 DIMMER Linear 0 – 100%	
21	000	000 - 255	LAYER 2 TRANSITION Crossfade between shape.	
22	000	000 - 255	LAYER 2 RED Linear 0 – 100%	
23	000	000 - 255	LAYER 2 GREEN Linear 0 – 100%	
24	000	000 - 255	LAYER 2 BLUE Linear 0 – 100%	
25	000	000 - 255	LAYER 2 WHITE Linear 0 – 100%	
26	000		LAYER 2 CTO	
		000 - 009	Unused range/CTO OFF	
		010 - 255	CTO from 8000K to 2700K	
27	255		LAYER 3 STROBE	
		000 - 003	Light OFF	
		004 - 103	Strobe linear from slow (1Hz) to fast (25Hz)..	
		104 - 107	Light ON	
		108 - 207	Pulsation linear from slow (0.5 Hz) to fast (25 Hz)	
		208 - 212	Light ON (Layer 3 Slave)	
		213 - 225	Random Slow Strobe effect	
		226 - 238	Random Medium Strobe effect	
		239 - 251	Random Fast Strobe effect	
252 - 255	Light ON (Layer 3 Master)			
28	000	000 - 255	LAYER 3 DIMMER	
			Linear 0 – 100%.	


Advanced	DMX Default Value	Bit Value	Function	
29	000		LAYER 4 STROBE ENGINE	
		000 - 005	No Effect	
		006 - 042	Ramp Up	
		043 - 085	Ramp Down	
		086 - 128	Ramp Up to Down	
		129 - 171	Random	
		172 - 214	Lightning	
		215 - 255	Spikes (Flash over low light)	
30	000	000 - 255	LAYER 4 STROBE ENGINE DIMMER Linear 0 – 100%.	
31	000	000 - 255	LAYER 4 STROBE ENGINE DURATION	
32	000		LAYER 4 STROBE ENGINE RATE	
		000 - 005	No Effect	
		006 - 255	Pulsation from slow (0.3 Hz) to fast (25 Hz)	
33	000		LAYER 4 STROBE EFFECT SELECTION	
		000 - 005	Normal	
		006 - 130	Static	
		131 - 255	Dynamic	
34	000		LAYER 4 STROBE EFFECT	
		000 - 015	Effect 1	
		016 - 031	Effect 2	
		032 - 047	Effect 3	
		048 - 239	
		240 - 255	Effect 16	
35	000		LAYER 4 STROBE INDEXING SPEED	
		000 - 255	Indexing	If Static mode is selected on strobe effect selection
		000 - 124	Speed from fast to slow, forward	
		125 - 130	STOP	If Dynamic mode is selected on strobe effect selection
		131 - 255	Speed from slow to fast, backward	
36	000		LAYER 4 STROBE FADE	
		000 - 005	OFF	
		006 - 130	Fade change from fast to slow	
		131 - 255	Wake change from fast to slow	

Function details – Pixels Engine

RGB	RGBW		Bit Value	Function
1	1		000 - 255	RED LED 1 Linear 0 – 100%.
2	2		000 - 255	GREEN LED 1 Linear 0 – 100%.
3	3		000 - 255	BLUE LED 1 Linear 0 – 100%.
-	4		000 - 255	WHITE LED 1 Linear 0 – 100%.
4	5		000 - 255	RED LED 2 Linear 0 – 100%.
5	6		000 - 255	GREEN LED 2 Linear 0 – 100%.
6	7		000 - 255	BLUE LED 2 Linear 0 – 100%.
-	8		000 - 255	WHITE LED 2 Linear 0 – 100%.
⋮	⋮		⋮	Functionalities are the same for all the Led's
10	13		000 - 255	RED LED 4 Linear 0 – 100%.
11	14		000 - 255	GREEN LED 4 Linear 0 – 100%.
12	15		000 - 255	BLUE LED 4 Linear 0 – 100%.
-	16		000 - 255	WHITE LED 4 Linear 0 – 100%.

Function details – Pixels Engine

STROBE	DMX Default Value	Bit Value	Function
1	000	000 - 255	WHITE LED 1 Linear 0 – 100%
2	000	000 - 255	WHITE LED 2 Linear 0 – 100%
3	000	000 - 255	WHITE LED 3 Linear 0 – 100%
⋮		⋮	Functionalities are the same for all the Led's
14	000	000 - 255	WHITE LED 14 Linear 0 – 100%
15	000	000 - 255	WHITE LED 15 Linear 0 – 100%
16	000	000 - 255	WHITE LED 16 Linear 0 – 100%

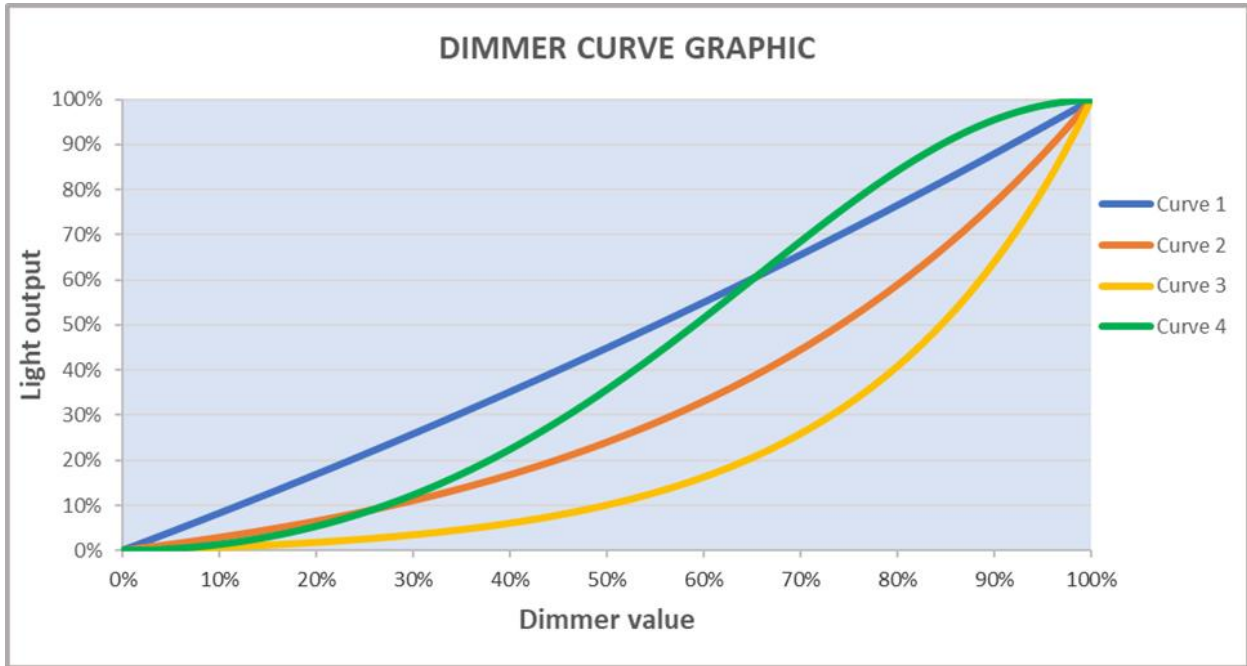

IMPORTANT NOTE: Dimmer Curve 5 has all the Leds synchronized, for balanced behavior in white.

