




# AORUN

## ULTRA-BRIGHT BEAM FIXTURE

- 2.3° BEAM ANGLE
- 8 & 16 FACET PRISM (COMBINABLE)
- 3 ANIMATION EFFECTS
- 169MM WIDE LENS FOR BIG MID-AIR EFFECTS
- FOLDABLE QUICK TRIGGER CLAMPS ATTACHED

Aorun, an ultra-bright beam fixture which combines high output, fast movements and an extensive feature package. The moving head utilises a 330W HRI light source which produces heavy mid-air effects through the specially designed 169mm lens.

The fixture has an 8 & 16 facet prism on-board. These prisms can be combined for even wider effects. Additionally, the gobo wheel offers 3 animation ranges, creating unique beam effects. A softening frost completes the effect package of the Aorun.

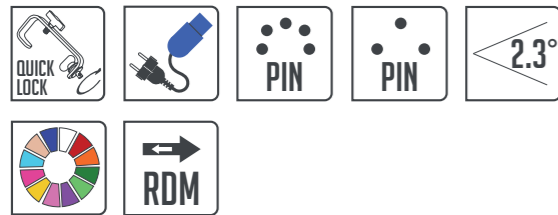

### PHYSICAL

LENGTH	380MM
WIDTH	280MM
HEIGHT (HEAD VERTICAL)	529MM
NET WEIGHT	18.8KG

### EFFECTS

GOBO WHEEL	11 GOBO'S, 3 ANIMATION RANGES & OPEN
COLOR WHEEL	14 COLORS & OPEN
FROST	VARIABLE 0 - 100%
PRISM	8 & 16 FACET (COMBINABLE)
SHUTTER	VARIABLE 0 - 100%, RANDOM & PULSE
DIMMER	0 - 100%

### OPTICAL

SOURCE	OSRAM SIRIUS HRI 330W XL
AVERAGE LIFESPAN	1500H
BEAM ANGLE	2.3°
LENS DIAMETER	169MM

### PHOTOMETRIC

OUTPUT	380000 LX @ 10M
COLOR TEMPERATURE	7600K

### CONNECTIONS

POWER	POWERCON IN AND OUT
DATA	3 & 5 PIN LOCKING XLR
UPDATES	USB

### CONTROL

SETTINGS	LCD DISPLAY
PROTOCOLS	DMX512 & RDM
CHANNELS	14 - 16

### INSTALLATION

MOUNTING	TURNABLE QUICK TRIGGER CLAMPS
ORIENTATION	ANY
PROTECTION RATING	IP20
SAFETY	ATTACHMENT POINT

### MOVEMENTS

PAN	540°
TILT	250°

### ELECTRICAL SPECIFICATION

INPUT	100 - 240V, 50/60 HZ
POWER CONSUMPTION	450W

### THERMAL SPECIFICATION

MIN. AMBIENT TEMP.	-5°C
MAX. AMBIENT TEMP.	35°C
COOLING	FORCED AIR

### ORDERING

CLF AORUN	160020
USER MANUAL, POWER CABLE, SAFETY CABLE & DMX CABLE	

### APPROVALS

CE COMPLIANT

OPTIONAL FLIGHTCASE & HANGING BRACKET SET

