


Type	S12 I/O socket for C12 relays with 2 x CO Logic connection , 5 A
------	---

Rated current	5 A
---------------	------------


Specifications	
Rated load	5 A / 250 V
Insulation	Test voltage V rms / 1 min
– All terminals/DIN rail	5 kV
Contacts terminals	2,5 kV
Contacts / Coil terminals	5 kV
Cross-section of connecting wire	
– Single-wire	4 mm ² or 2 x 2,5 mm ²
– Multi-wire	22 - 14 AWG
Max. screw torque	1,2 Nm
Screw dimensions	M3, Pozi, slot
Integrated retaining clip/plastic	for relay series C12 (CP-17B)
Labelling space	detachable
Connection label	1...9; DIN/EN
Mounting	DIN rail TS35 or mounting plate
Ambient temperature operation/storage	-40 (no ice)...60 °C / -40 ... 80 °C
Weight	31g

Socket for IRC relays	C12, C12G
-----------------------	------------------





Accessories	
Coil bridge bars	V10-G, V40-G, V10-R, V40-R, V10-A, V40-A
Retaining clip, plastic	B20-G, B20-R, B20-A, CP-07B CP-17B

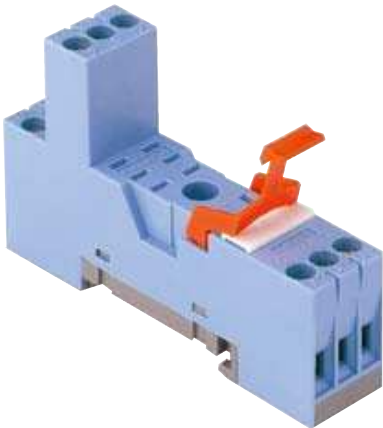

Connection diagram

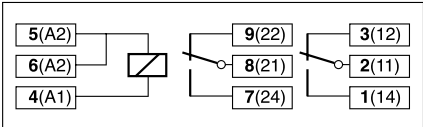

Dimensions [mm]

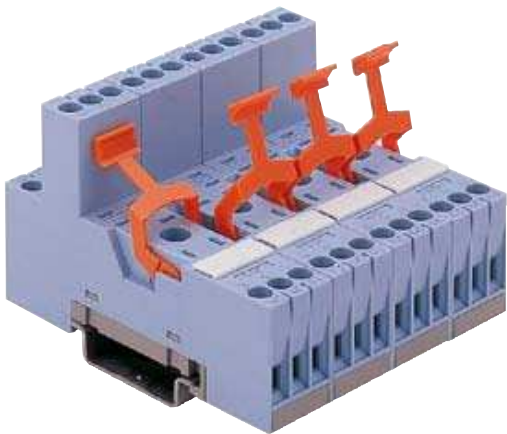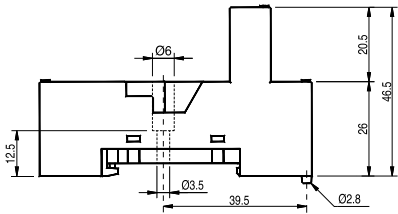

Technical approvals, conformities



IEC 61810 EN 60947