



DTW BLINDER 350 IP™



The IP65 rated **DTW Blinder 350 IP™** features (2) high powered 175W 2-in-1 Warm White / Amber COB LEDs, 65° wide beam angle, full color temperature range control plus independent Dim-to-Warm channel control (1,800K - 3,200K), easily attachable 15° narrow beam filters (included), pixel control, manual adjustable pan focus, variable dimming curve modes, strobe effects, flicker free operation for TV and Film, RDM (Remote Device Management), IP rated DMX and IP65 Locking Power Cable in/out connections, LCD menu display with 4 touch button control panel, integrated yoke and side mounting brackets, and a multi-voltage universal auto switching power supply (100-250v).



FEATURES

IP65 Rated

Pixel Control

65° Wide Beam Angle

15° Narrow Beam Filters (Included)

Independent Dim-to-Warm Channel Control (1,800K - 3,200K)

RDM (Remote Device Management)

Rugged Die-Cast Aluminum Exterior

Flicker Free Operation for TV and FILM



PRODUCT SPECIFICATIONS

SOURCE

(2) 175W 2-in-1 Warm White/Amber COB LEDs
50,000 Hour Average LED Life*

*LED Life may vary depending on several factors including but not limited to:

Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, and Dimming.

PHOTOMETRIC DATA (Full ON)

4,216 LUX 391.7 FC (15° @ 9.8 ft / 3m w/Fresnel lens)

593 LUX 51.1 FC (65° @ 9.8 ft / 3m w/No Fresnel lens)

EFFECTS

Pixel Control
15° Narrow Beam Angle with included Fresnel Lens
65° Wide Beam Angle with Fresnel Lens removed
Unique Dim-to-Warm Channel Control (1,800K - 3,200K)
Independent Dimming of Each COB LED Module
Electronic Strobe and Variable Dimming Curves

COLOR

Warm White / Amber

CONTROL / CONNECTIONS

(9) DMX Channel Modes (9 Total Channels)
RDM (Remote Device Management)
4 Button Control Panel and LCD Menu Display
IP Rated 5pin DMX In/Out
IP65 Locking Power Cable In/Out
With Wired Digital Communication Network

SIZE / WEIGHT

Length: 15.7" (400mm)
Width: 9.5" (241mm)
Horizontal Height: 9.6" (245mm)
Weight: 18.0 lbs. (8.2 kg)

ELECTRICAL / THERMAL

AC 100-240V - 50/60Hz
310W Max Power Consumption
Multiple Unit Power Linking
5°F to 113°F (-15°C to 45°C)

APPROVALS / RATINGS

CE | cETLus | IP65




OPTIONAL ACCESSORIES


ORDER CODE	ITEM
DTW350	DTW Blinder 350 IP
NARROW CLAMP	PRO 2" Wrap Around Clamp
805000053	Omega Bracket (107mm)
NEU088	3 ft. (1m) IP65 Locking Power Link Cable
	Additional cable lengths available

PHOTOMETRIC DATA


***with included Fresnel lens attached**

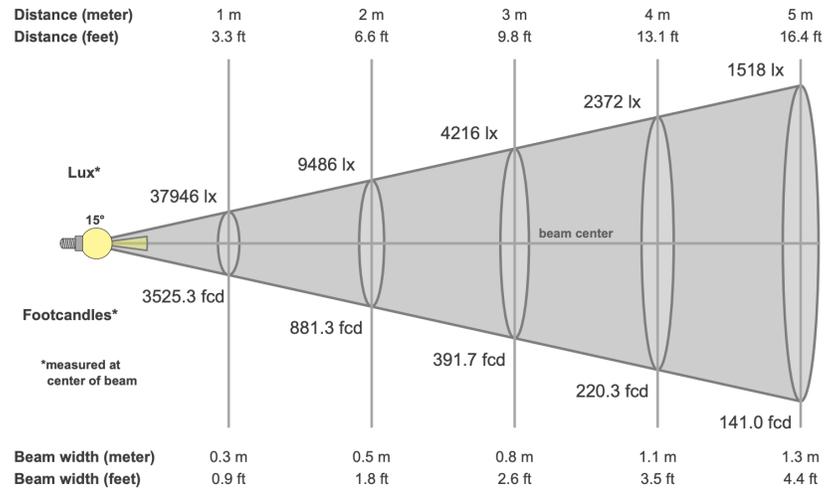

***NO Fresnel lens attached**

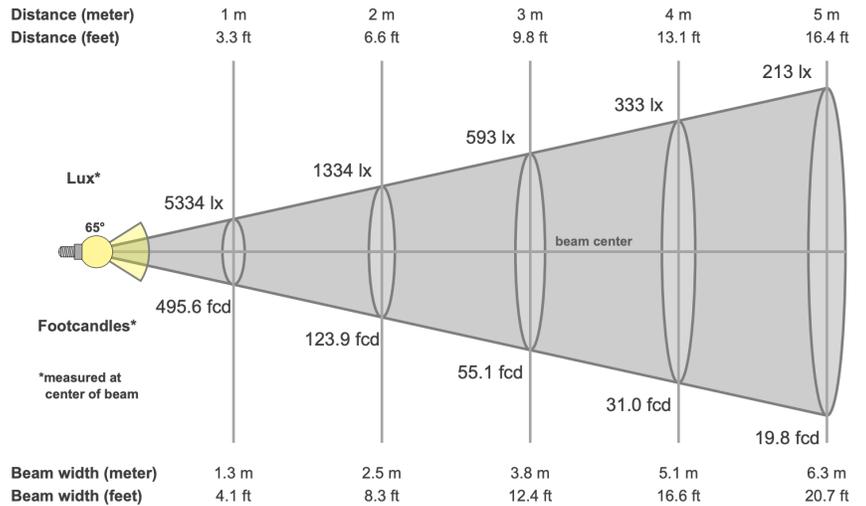

DIMENSIONAL DIAGRAMS

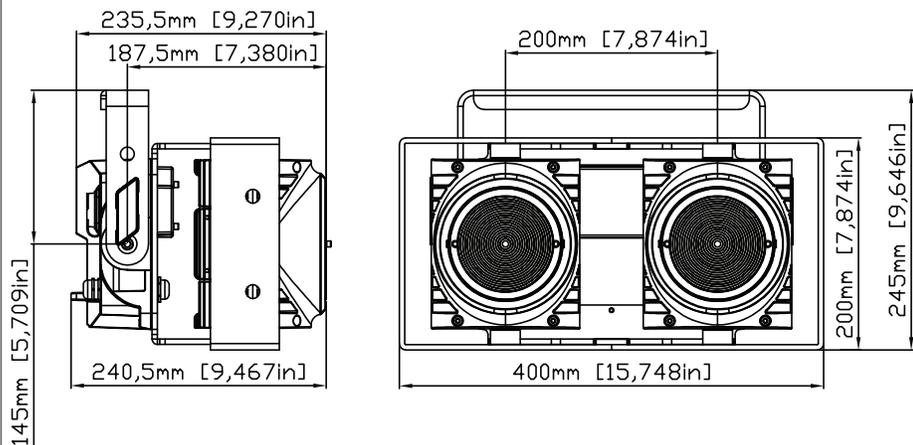

Specifications are subject to change without notice ©Elation Professional 03/09/2022

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu