

Selador Desire® LED luminaires



Elegance in LED lighting



Selador Desire® body styles

Indoors, outdoors, on the stage, in the studio, on the road or for architecture. There's a Desire luminaire to cover every lighting task:



Desire D40

LED light you have to see to believe

Brilliant, high-quality light for indoor applications



Desire D60

The brightest, boldest LED light

Powerful, high-intensity light for interior installations



Desire D40XT

Bright, even when wet

All-weather exterior luminaire for portable use



Desire D40XTI

Staying power

Professional-level lighting for permanent installations – indoors or out



Desire D22

Small size, big attitude

Bright, Selador-quality lighting in a compact footprint

Selador Desire arrays

Desire luminaires are based on the x7 Color System™, which combines up to seven LED colors onto one unit, creating a nearly limitless range of hues. ETC has developed an assortment of x7 arrays to meet specific lighting needs:



Lustr+™

Extreme x7 color

The most flexible color mixing, for adjustable whites, tints and bold hues



Vivid™*

Killer color, bright beam

High-impact saturated colors



Fire™*

Smoldering crimsons, golds and ambers

Supersaturated or lightly tinted warm-spectrum hues



Ice™*

Silky sapphires, plums and emeralds

Efficient, high-brightness cool tones



Studio HD

Ready for its close-up

Sophisticated, high-definition whites with variable color temperatures



Studio Tungsten

The soul of tungsten, but with more light and less energy

Broadcast-quality, warm white light with a 3000K color temperature



Studio Daylight

The look of daylight

Cool-white LED emitters for high-output 5600K white light that looks great on camera or in person

*Not available for Desire D22



Selador Desire accessories

The ability to mold a light beam to perfectly fit an application is an absolute necessity. That's why the Desire LED family accepts a range of accessories.

Lensing options

ETC offers several sizes of diffusers: linear for tighter control of the beam, and round and oval to make the beam softer and allow for easier blending of light.

Masking options

There are a variety of Desire accessories that mask the LEDs from view and cut down on glare:

- Barn doors
- Top hats
- Louvers



ETC
100% DIMMABLE - DIMMING: DIMMABLE
SURFABLE FROM WET LOCATIONS / IPMS
DIM. 75°C DIMMABLE CONNECTIONS - LESS
CONDUCTIVE MATERIAL TO ENSURE CORRECT
CONNECTION TO THE DIMMER. DIMMER
CONNECTION LINE ELECTRICAL CONNECTIONS
CAUTION - RISK OF FIRE - ATTENTION - RISQUE D'INCENDIE
CE
ETL
DESIRE D40XTI
CONVERTER FOR 50V & 60V SYSTEMS
ALUMINUM ALUMINATION 75°C DIMMABLE
THE INFORMATION SOUV. ADEQUATS
© 2014 ETC Lighting, Inc. All rights reserved. ETC Lighting, Inc. 4452 27th St. San Francisco, CA 94114
Made in USA



Selador Desire for permanent installations

A lasting impression. The Desire LED line includes several luminaires that provide ETC-quality LED light for long-term applications:

- Desire D40XTI
- Track-mount Desire D22
- Desire D22 with a canopy kit

Superior color, superior control

x7 fills in the gaps

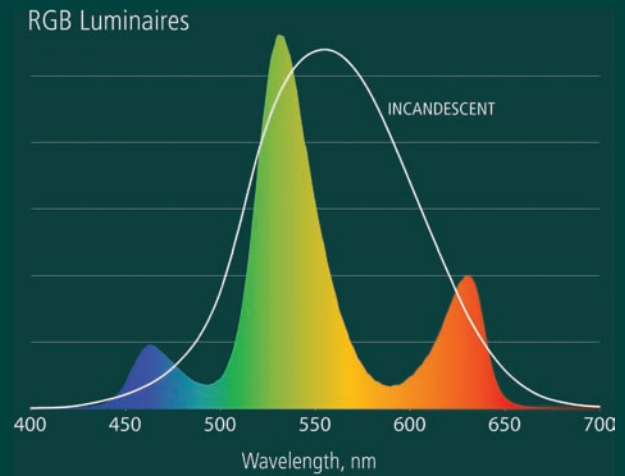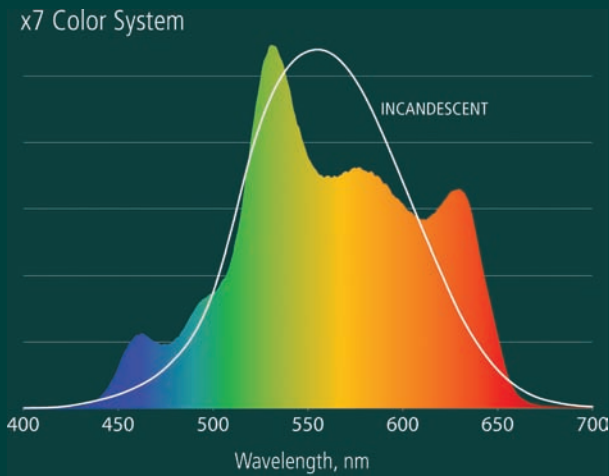

Largest gamut

More colors, greater flexibility



x7 Color System



RGB

Easy control

HSI (Hue, Saturation, Intensity)





Two easy steps for color selection:

- 1 Choose your color (hue)
- 2 Choose your saturation

Smooth fades

Graceful intensity fades,
seamless color fades

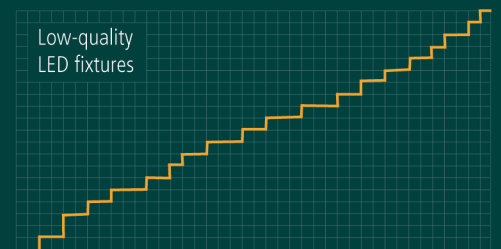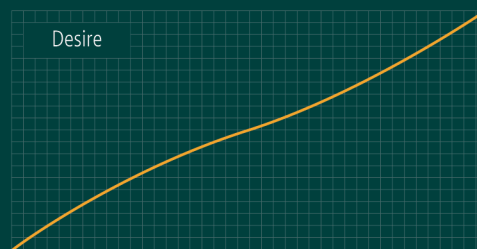

Corporate Headquarters ■ 3031 Pleasant View Rd, PO Box 620979, Middleton WI 53562 0979 USA ■ Tel +1 608 831 4116
London, UK ■ Unit 26-28, Victoria Industrial Estate, Victoria Road, London W3 6UU, UK ■ Tel +44 (0) 20 8896 1000
Rome, IT ■ Via Pieve Torina, 48, 00156 Rome, Italy ■ Tel +39 (06) 32 111 683
Holzkirchen, DE ■ Ohmstrasse 3, 83607 Holzkirchen, Germany ■ Tel +49 (80 24) 47 00-0
Hong Kong ■ Room 1801, 18/F, Tower 1 Phase 1, Enterprise Square, 9 Sheung Yuet Road, Kowloon Bay, Kowloon, Hong Kong ■ Tel +852 2799 1220
Web ■ www.etccconnect.com ■ Copyright©2013 ETC. All Rights Reserved. All product information and specifications subject to change. 7410L1012 Rev A 07/13