



Type(s)
Project
Date
Notes

GENERAL INFORMATION

The Eos Remote Interface provides the same access to your system as a console - without the added cost of output control. Perfectly at home on a tech table or in an equipment rack, the Remote Interface supports up to three 4K multi-touch monitors and connects to your Eos Family lighting controller through Ethernet. Add an Eos Programming Wing to turn the Eos Remote Interface into a workstation, or use the haptic touchscreen to trigger control sequences or screen changes.

Eos Family software includes:

- Approachable yet powerful syntax for programmers of every level
- Industry-leading color control tools
- Magic Sheets for custom programming and displays
- Augment3d 3D programming and visualization environment
- Virtual Media Server function for pixel-mapping
- Timecode and automation integration
- Multi-user and multi-programmer working environment

For drawings, photos, and more, visit the [Eos Remote Interface](https://www.etcconnect.com/Eos) product webpage. To explore the latest software features, accessories, and other Eos Family products, visit [etcconnect.com/Eos](https://www.etcconnect.com/Eos).

ORDERING INFORMATION

EOS REMOTE INTERFACE

MODEL	DESCRIPTION	PART NUMBER
EOS REM INT	Eos Remote Interface	4450A1041 *

* Add -US for Edison, -EU for Schuko/UK13A, -AZ for Australasian Type I

All models are available without wireless radios (WiFi and Bluetooth). Please contact ETC for ordering information.

SHIPS WITH:

- One three-button scroll mouse and mousepad
- Cherry tenkeyless backlit alpha-numeric keyboard
- Locking regionalized IEC power cord
- Two 19-inch rack-mount ears and mounting hardware
- Four rubberized feet (for desktop use)
- Augment3d AR target kit

EOS REMOTE INTERFACE ACCESSORIES

MODEL	DESCRIPTION	PART NUMBER
EOS PGW	Eos Programming Wing	4240A1020 *
EOS MFW 10	Eos Motorized Fader Wing 10	4240A1021 *
EOS MFW 20	Eos Motorized Fader Wing 20	4240A1022 *
EOS FW 20	Eos Standard Fader Wing 20	4240A1023 *
EOS FW 40	Eos Standard Fader Wing 40	4240A1024 *

* Add -US for Edison, -EU for Schuko/UK13A, -AZ for Australasian Type I



HARDWARE AND INTERFACES

- 2U 19-inch rack-mount form factor
- One 5-inch high-resolution front panel display, with multi-touch and haptic touch feedback
- Supports three external display port monitors (1920x1080 minimum, 3840x2160 maximum), with optional single-touch or multi-touch screen control and DDC/CI support
- One dimmable warm-white LED accent light
- Solid-state hard drive
- IEC power input (100–240 VAC at 50/60 Hz), fused mains power switch, locking regionalized power cable included
- Two individually configurable Gigabit Ethernet ports, RJ45 connectors
- One 802.11ac WiFi Ethernet adapter (to be enabled with future software)
- Bluetooth 5.1 for connecting input accessories (to be enabled with future software)
- USB 3.1 ports, for flash drives, pointing devices, keyboards (5 USB-A ports, 3 USB-C ports)
- One Kensington lock port

EOS REMOTE INTERFACE DIMENSIONS AND WEIGHTS *

MODEL	HEIGHT		WIDTH		DEPTH		WEIGHT	
	mm	in	mm	in	mm	in	kg	lb
Eos Remote Interface	89	3.5	435	17.1	345	13.6	TBD	TBD
Eos Remote Interface in shipping container	343	13.5	604	23.8	343	13.5	TBD	TBD


* Dimensions and weights typical

ELECTRICAL AND THERMAL

- Power consumption approximately 1 A at 120 V or 230/240 V
- Ambient room temperature 0°–35°C (32°–95°F)
- Ambient humidity up to 90% non-condensing

REGULATORY AND COMPLIANCE

- CE compliant
- cETLus listed
- UKCA marked
- FCC compliant
- RoHS compliant
- WEEE

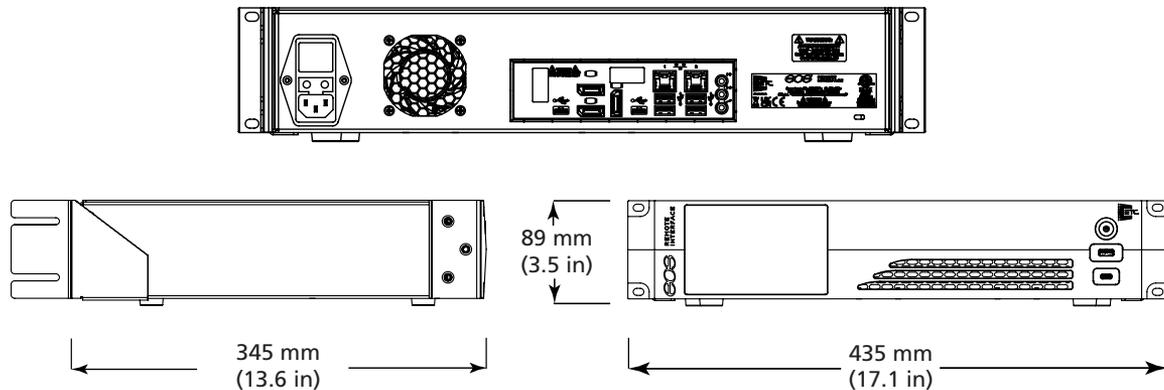

Corporate Headquarters • Middleton, WI USA
Global Offices • London, UK • Rome, IT • Holzkirchen, DE • Paris, FR • Hong Kong
 Dubai, UAE • Singapore • New York, NY • Orlando, FL • Los Angeles, CA • Austin, TX
 Copyright©2022 ETC. All Rights Reserved. All product information and specifications subject to change. Rev A 2022-02
 Trademark and patent info: etconnect.com/IP

etconnect.com