

Type(s)

Project

Date

Notes



GENERAL INFORMATION

The Source Four Mini LED Plus features the same crisp optics, user-friendly functionality, and sleek look of the legendary Source Four and Source Four Mini fixture but with a much higher output than the standard Source Four Mini LED. This compact fixture is ideal for architectural and other small installation applications, including use with DMX, F-Drive, and DALI.

APPLICATIONS

- Museums
- Retail
- Restaurants
- Hospitality
- Theatres

FEATURES

- Higher output than the traditional Source Four Mini LED—over 900 max field lumens
- 19°, 26°, 36°, and 50° interchangeable lens tubes
- Long-life dimmable white LED source available in a wide variety of color temperatures and color rendering levels
- Three-plane shutters
- Multiple accessories available for color, pattern, and filtering
- Available in Portable, Canopy, and OneTrack mounting options
- F-Drive compatible versions available
- DALI control available on OneTrack mounting
- Available in black and white, contact ETC for custom colors

POWER INPUT OPTIONS

MODEL	100–120 VAC	230–240 VAC	230–277 VAC	F-DRIVE
Portable	X	X		X
OneTrack by ETC	X	X	X	
Canopy				X

Source Four Mini LED Plus Body Only - Order Lens Tube Separately

MODEL	COLOR TEMP	CRI	VOLTAGE	MOUNTING	CONTROL	COLOR
4MLP - Source Four Mini LED Plus	27 - 2700 K 30 - 3000 K 40 - 4000 K 50 - 5000 K	80 - Standard 90 - Gallery -Gallery available with 2700 K and 3000 K options. -Standard available in 3000 K, 4000 K, and 5000 K options	120 - 120 V 230 - 230 V 277 - 277 V FD - F-Drive compatible	OT - OneTrack C - Canopy P - Portable (NEMA 5-15P) PU - Portable (UK 13 A Plug) PE - Portable (EU Schuko Plug) -F-Drive compatible available in Canopy and Portable (P) only.	DMX - DMX DALI - DALI (Blank) - F-Drive compatible -DALI only available in 230 V CE OneTrack	BLANK - Black 1 - White 8 - Custom

To complete the form, simply select an option at the bottom of each column to populate the last row with your desired model number.

PRODUCT SPECIFICATIONS

Source

LED details	Lumileds 1204HD
Max field lumens	931 (4000 K, 50°)
Lumens per watt	49.9
L70 rating (hours to 70% output)	50,000

LED Color Temperature Data

Color temperature options	2700 K / 3000 K / 4000 K / 5000 K
CRI options	90 CRI - 2700 K and 3000 K 80 CRI - 3000 K, 4000 K and 5000 K
Red shift	No

Optical

Field angle options	19° / 26° / 36° / 50°
Pattern projection	Yes
Pattern size	E (37.5 mm with a 25.4 mm image area). Holder included
Front accessory slot	Dual, captive accessory slots with 70 mm (2.75 in) media frame (included)

Electrical

Voltage range	100–120 V 50/60 Hz (Portable, Track) 230–240 V 50/60 Hz (Portable) 230–277 V 50/60 Hz (Track) 24 VDC 700 mA (F-Drive)
Power cord length	190 cm (75 in) AC portable variants only
Control input options	DMX - OneTrack, Portable DALI - OneTrack 3-Circuit F-Drive - Canopy and Portable only
Track adapter (Track variant only)	120 V - OneTrack 230 V - OneTrack 3-Circuit + DALI 277 V - OneTrack
Wattage	16 W typical, 20 W max
Inrush (first half-cycle) with DMX variant	115 V - 25 A 230 V - 45 A
Inrush (first half-cycle) for DALI OneTrack variant	120 V - 2 A 277 V - 6 A
Fixtures per circuit with DMX variant	45 fixtures (R20 module or similar)
Fixtures per circuit with DALI OneTrack variant	90 fixtures (R20 module or similar)
Dimming compatibility	Via DMX or DALI control only

Thermal

Ambient operating temp	0°C to 40°C (32°F to 104°F)
Fan (controllable)	No fan
BTUs/hour	54.59 typical / 68.24 max

Control

Protocols	DMX - OneTrack, Portable DALI - OneTrack
RDM configuration	Yes (DMX versions only)
UI type	Rotary pots (DMX versions only)
Local control	DMX OneTrack and DMX Portable only

F-Drive

Approved drivers	F-Drive R12 CC150 Output Card Model Number: FD-ROC-CC150 F-Drive W1 CC Wall Mount Model Number: FDW1CCD and FDW1ECCD F-Drive CC 8 Card Model Number: FD-RX-OC-CC8
Maximum units per approved driver	FD-ROC-CC150: four (4) FD-W1-CCD: four (4) FD-W1E-CCD: four (4) FD-RX-OC-CC8: eight (8)
Luminaire operating current	450 mA
Input type	RJ45 in and thru connectors Minimum required conductor gauge 23 AWG / 0.25 mm²
Control	DMX control via F-Drive compatible models only via R12 CC150, W1 CC, or RX CC8 drivers
Complete driver data	etcconnect.com/F-Drive

Physical

Materials	Die-cast aluminum (A380 grade)
Color options	Black, white, or custom color
Mounting options	OneTrack, Portable, or Canopy
IP rating	IP20
Weight	See the Source Four Mini LED Plus Dimensions and Weights table on page 7
Included accessories (Portable only)	E-size pattern holder Magnetic media holder
Notes	Tool-free beam adjustment Locking, full hard shutters in a tri-plane assembly Thermally insulated knobs and shutter handles

Warranty


Fixture	5 years
LED array	10 years

Approved Regulatory Standards


All versions	cETLus Listed CE Compliant UKCA Compliant
Portable versions	Conforms to ANSI/UL STD.1598 Certified to CSA STD. C22.2 No: 250
OneTrack versions	Conforms to ANSI/UL STD.1574 Certified to CSA STD. C22.2 No: 9.0
F-Drive Canopy version	Conforms to ANSI/UL STD.2108 Certified to CSA STD. C22.2 No. 250.2

COLOR METRIC INFORMATION

SOURCE FOUR MINI LED PLUS 2700 K GALLERY (90 CRI) TM-30-18

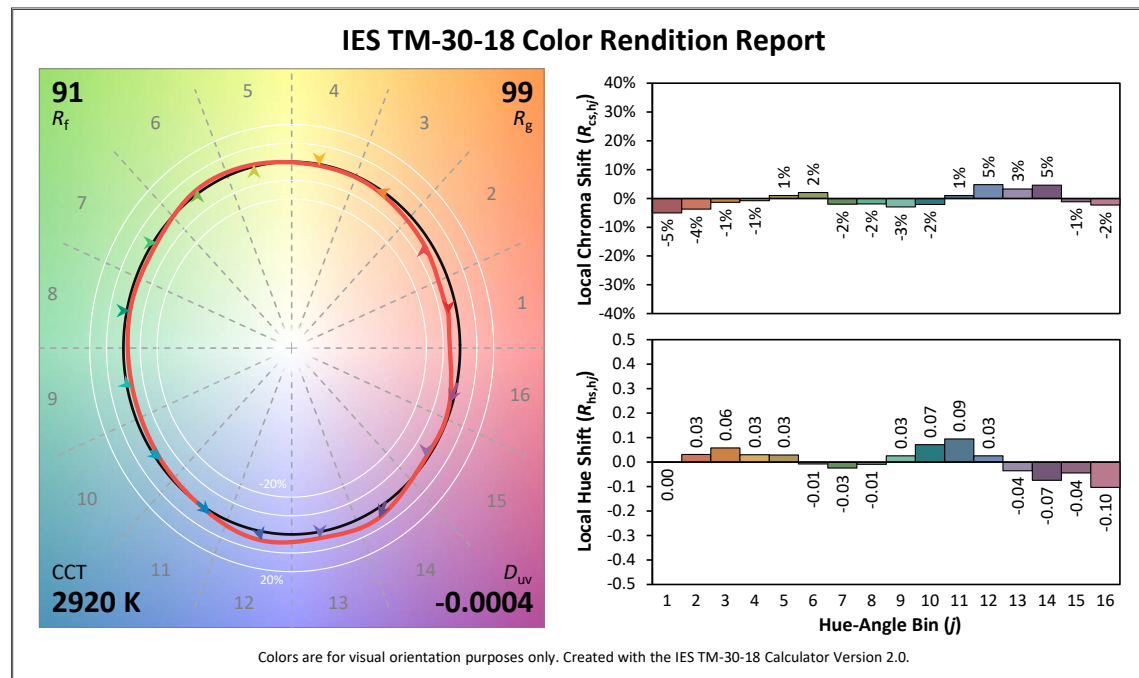


SOURCE FOUR MINI LED PLUS 3000 K GALLERY (90 CRI) TM-30-18

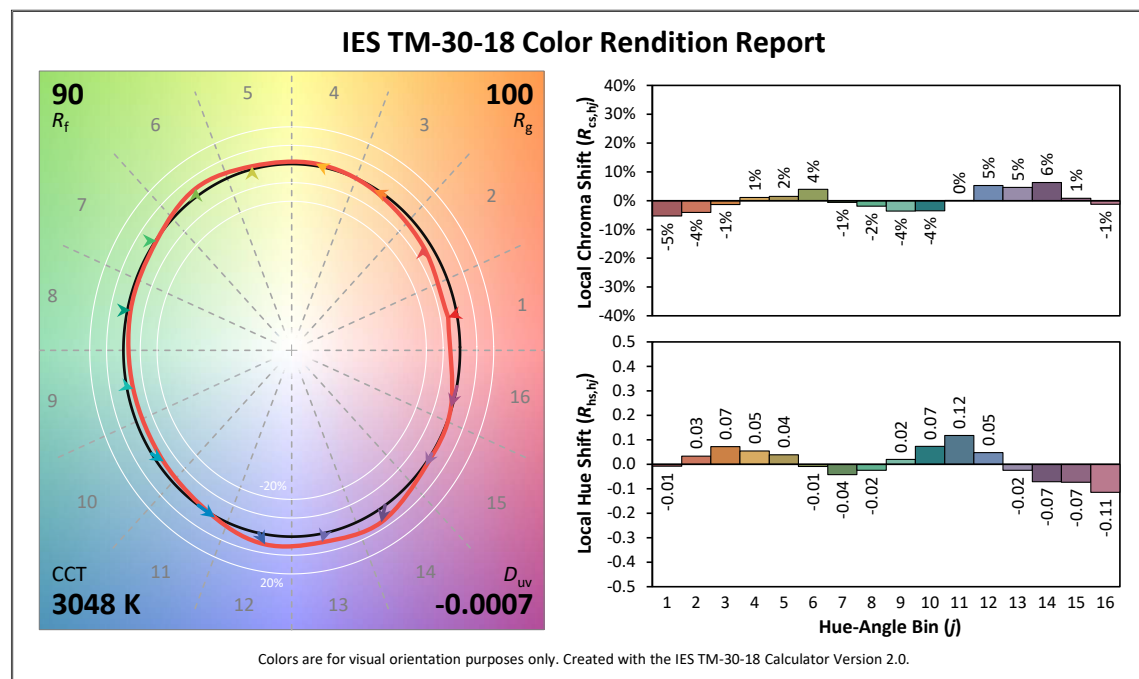


COLOR METRIC INFORMATION

SOURCE FOUR MINI LED PLUS 3000 K (80 CRI) TM-30-18

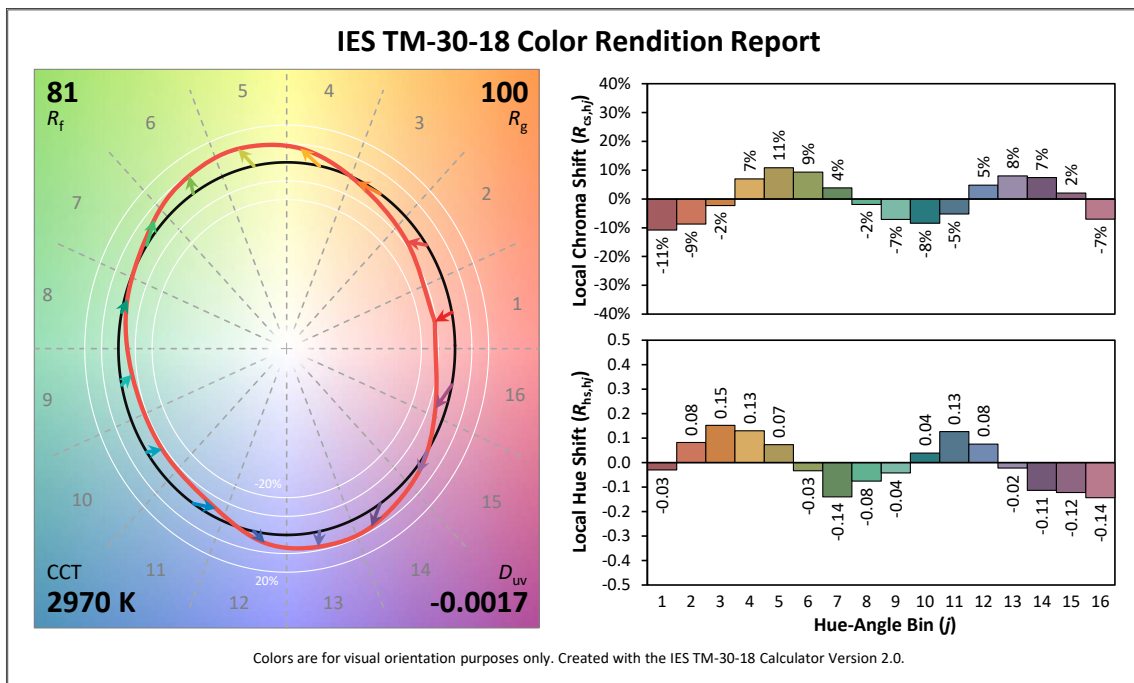


SOURCE FOUR MINI LED PLUS 4000 K (80 CRI) TM-30-18

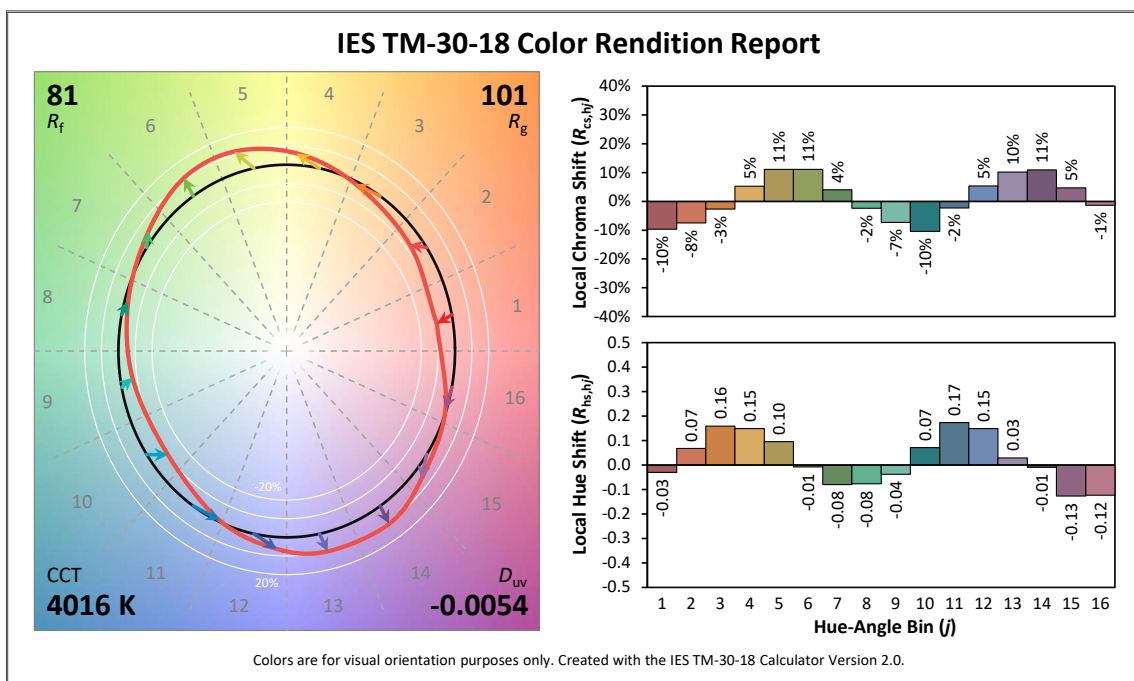

COLOR METRIC INFORMATION

SOURCE FOUR MINI LED PLUS 5000 K (80 CRI) TM-30-18

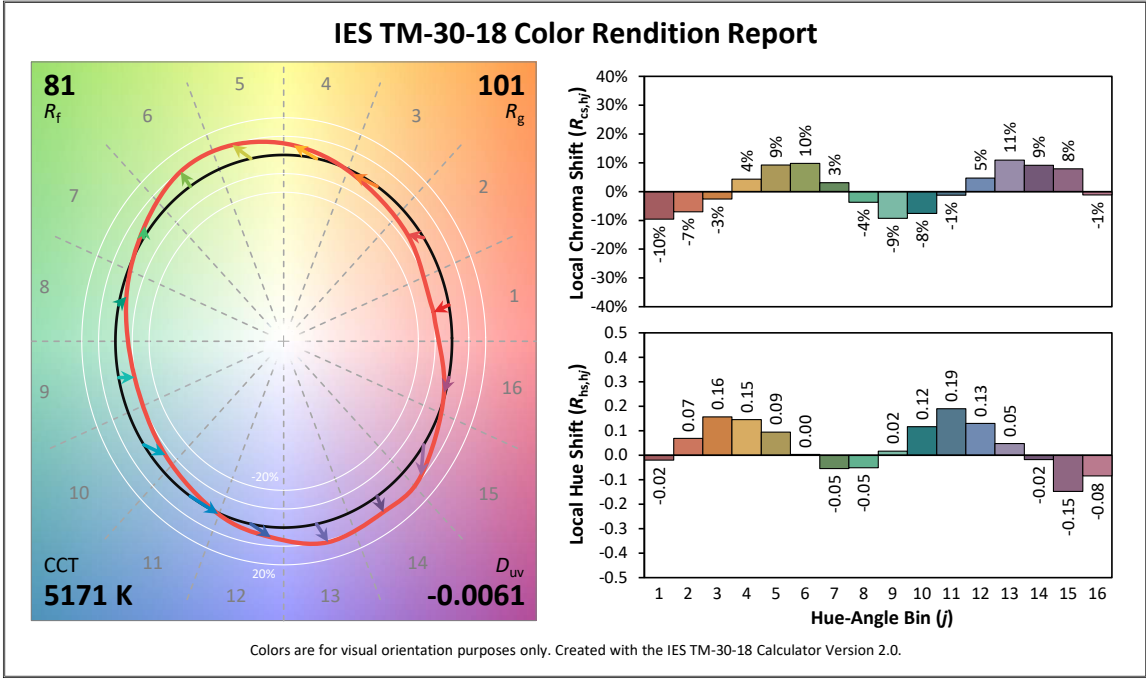

PHOTOMETRY

Array	Lens Tube	Candela	Delivered Lumens	Field Lumens	Beam Lumens	Power Consumption	Efficacy (lpw)
2700 K / 90 CRI	19°	6,899	656	640	505	18.6	34.4
2700 K / 90 CRI	26°	5,578	667	654	477	18.6	35.2
2700 K / 90 CRI	36°	2,998	695	682	505	18.6	36.7
2700 K / 90 CRI	50°	1,654	702	689	394	18.6	37.0

3000 K / 90 CRI	19°	7,051	670	654	516	18.3	35.7
3000 K / 90 CRI	26°	5,674	681	668	482	18.3	36.5
3000 K / 90 CRI	36°	3,064	710	697	516	18.3	38.1
3000 K / 90 CRI	50°	1,690	717	704	403	18.3	38.5

3000 K / 80 CRI	19°	8,534	812	792	625	18.2	43.5
3000 K / 80 CRI	26°	6,828	824	809	593	18.2	44.5
3000 K / 80 CRI	36°	3,709	860	844	625	18.2	46.4
3000 K / 80 CRI	50°	2,046	868	852	487	18.2	46.8

4000 K / 80 CRI	19°	9,148	870	849	670	18.3	46.4
4000 K / 80 CRI	26°	7,423	884	867	629	18.3	47.4
4000 K / 80 CRI	36°	3,975	922	904	670	18.3	49.4
4000 K / 80 CRI	50°	2,193	931	914	522	18.3	49.9

5000 K / 80 CRI	19°	9,010	857	836	660	18.2	45.9
5000 K / 80 CRI	26°	7,306	871	854	630	18.2	46.9
5000 K / 80 CRI	36°	3,915	908	891	660	18.2	49.0
5000 K / 80 CRI	50°	2,160	917	900	515	18.2	49.5

ORDERING INFORMATION

Source Four Mini LED Plus Lens Tubes


MODEL	DESCRIPTION	
4M19LT	19° Source Four Mini Lens Tube, Black	
4M26LT	26° Source Four Mini Lens Tube, Black	
4M36LT	36° Source Four Mini Lens Tube, Black	
4M50LT	50° Source Four Mini Lens Tube, Black	
COLOR OPTIONS (add suffix below to above model after "LT")		
-1	White	
-8	Custom	

Source Four Mini LED Plus Accessories


MODEL	DESCRIPTION	
4MCC	S4 Mini C-Clamp, Black*	
4MPH	Pattern holder	
4MCF	Color frame	
4MD	Donut	
4MTH	Top hat	
4MTHS	Top hat short	
4MHH	Half hat	
4MHHS	Half hat short	

*Source Four Mini LED Plus Portable comes with no clamp included. Please choose from the above clamps if one is required.


TOP HAT SHORT
4MTHS




TOP HAT
4MTH

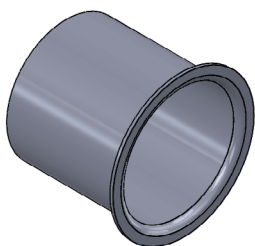


HALF HAT SHORT
4MHHS



HALF HAT
4MHH



DONUT
4MD




PHYSICAL


Source Four Mini LED Plus Dimensions and Weights

	HEIGHT		WIDTH		DEPTH		WEIGHT		SHIPPING WEIGHT	
	in	mm	in	mm	in	mm	lb	kg	lb	kg
OneTrack DMX	9.95	253	5.25	133	9.69	246	2.9	1.3	3.9	1.8
OneTrack DALI	8.86	225	5.25	133	9.69	246	1.9	0.8	3.2	1.4
Portable DMX	7.80	198	5.25	133	9.69	246	2.6	1.2	3.6	1.6
F-Drive Portable	9.87	251	5.25	133	9.69	246	1.6	0.8	2.8	1.3
F-Drive Canopy	8.18	208	5.25	133	9.69	246	2.2	1.0	3.3	1.5


SOURCE FOUR MINI LED PLUS DMX ONETRACK MOUNT

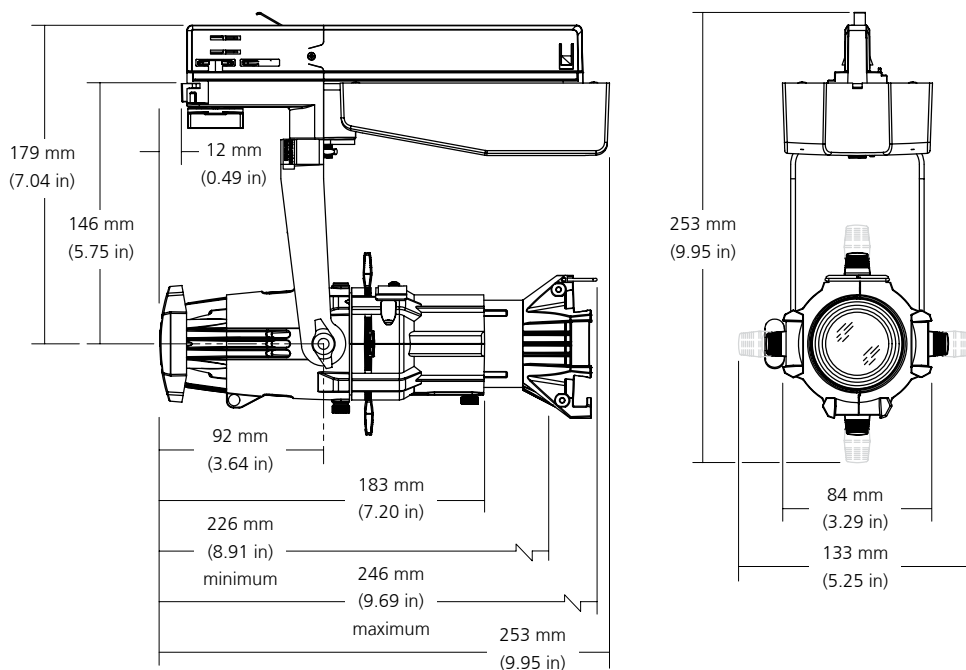


SOURCE FOUR MINI LED PLUS DALI ONETRACK MOUNT

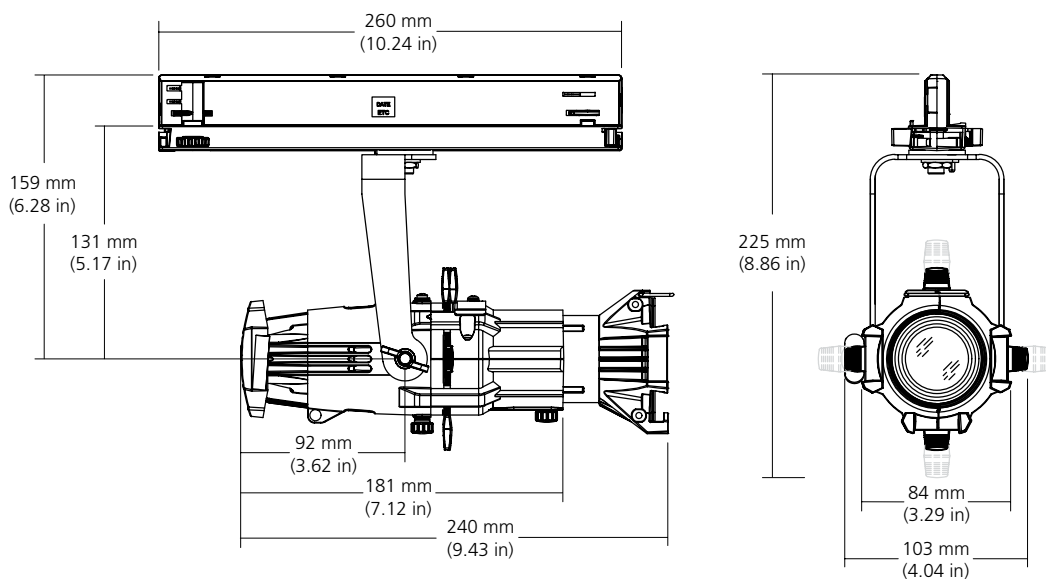


SOURCE FOUR MINI LED PLUS PORTABLE - F-DRIVE

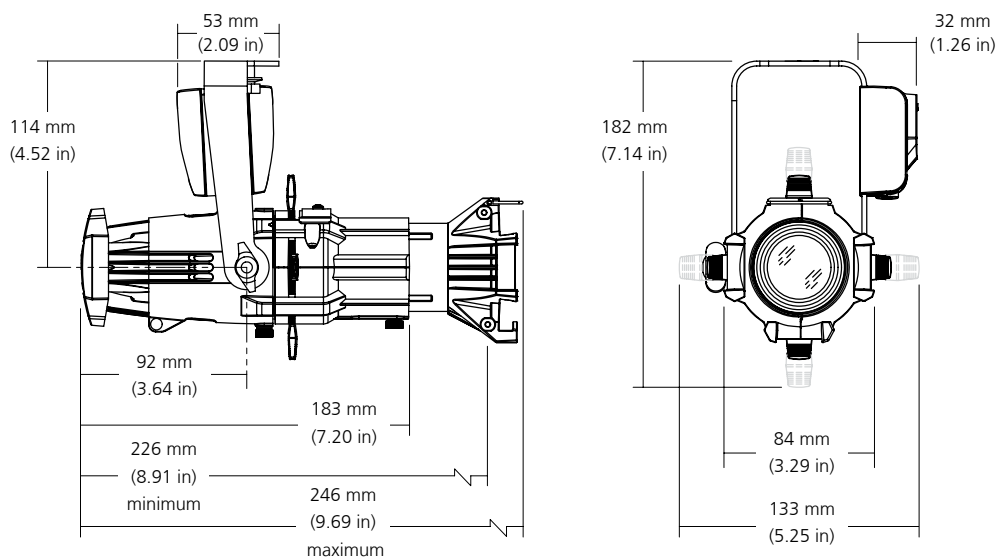

SOURCE FOUR MINI LED PLUS CANOPY - F-DRIVE

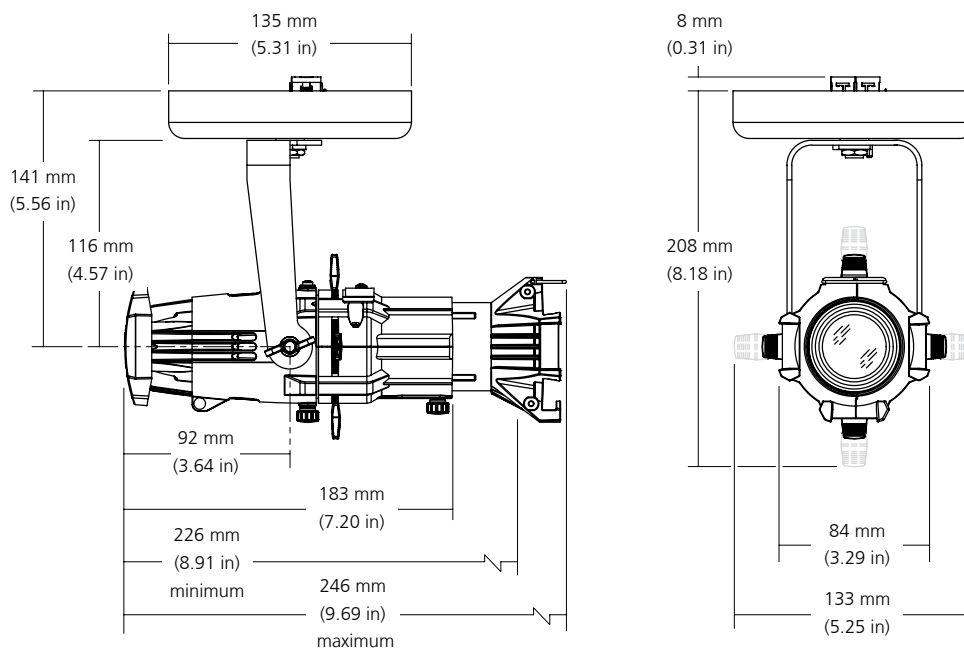

SOURCE FOUR MINI LED PLUS PORTABLE - DMX

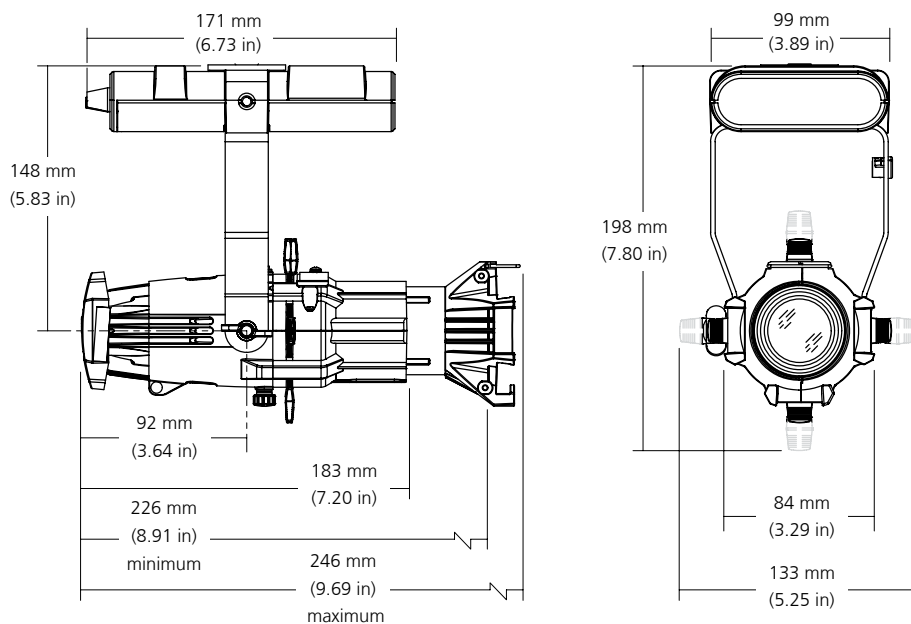

Corporate Headquarters • Middleton, WI USA

Global Offices • London, UK • Rome, IT • Holzkirchen, DE • Paris, FR • Hong Kong
Dubai, UAE • Singapore • New York, NY • Orlando, FL • Los Angeles, CA • Austin, TX

©2026 ETC. All Rights Reserved. All product information and specifications subject to change. Rev B 2026-01

*Trademark and patent info: etcconnect.com/IP • Third-party license agreement info: etcconnect.com/licenses

etcconnect.com