

**Hisense**

# **USER MANUAL**



1418453 RSAG2.025.61803SS

***English***

# Contents

<b>1. Declaration .....</b>	<b>1</b>
<b>2. Introduction.....</b>	<b>4</b>
2.1 Package Contents.....	4
2.2 Products View.....	5
2.3 Remote Control.....	7
2.4 Low Blue Light Mode.....	9
<b>3. Installation Guide .....</b>	<b>10</b>
3.1 Wall Mount Kit Specifications (VESA) .....	10
3.2 Installing the OPS (Optional) .....	11
<b>4. Making Connections .....</b>	<b>13</b>
<b>5. Appendix .....</b>	<b>18</b>
5.1 Specification.....	18
5.2 Other Information.....	21
5.3 Certification and Compliance.....	23
5.4 EU Declaration of conformity (DOC) .....	25
5.5 UK Declaration of conformity (DOC) .....	28
<b>6. Troubleshooting .....</b>	<b>31</b>

# Declaration

## 1. Declaration



### Declaration

Any content and service accessed through this device, while only intended for individual non-commercial use, shall be the property of the applicable third party and subject to protection by regulations and laws on copyright, patent, trademark and other intellectual property rights. No part of such content and service may be modified, duplicated, published, uploaded, distributed, translated, marketed, or used to make and distribute products derived from it without the prior permission of the content owner or service provider.

You acknowledge and agree explicitly that you will solely bear the risk associated with the use of this device, and further you will solely bear any risk related to satisfactory quality, performance and accuracy for any content and service accessed through this device. To the maximum extent permitted by applicable law, this device and any third party's content and service is provided as it is without any guarantee, express or implied.

Manufacturer hereby declare explicitly that Manufacturer shall not be held liable for any guarantee and conditions, express or implied, related to this device and any content and service, including but not limited to warranty on marketability, satisfactory quality, fitness for a particular purpose, accuracy, quiet use and non-violation of any third party's rights; to the maximum extent permitted by applicable law, Manufacturer gives no guarantee on the accuracy, validity, timeliness, legitimacy and completeness of any content or service provided through this device, or the fitness of such device, content or service for your particular requirement, or the protection from interruption and error during operation of such device, content or service; to the maximum extent permitted by applicable law, in any case, including fault or neglect, Manufacturer shall not be held liable for legal actions or indemnity obligation arising from any consequence as a result of or related to any information loaded in this device or use of such device, content or service by you or any third party

Any content and service provided as it is together with this device shall be the property of the applicable third party, therefore Manufacturer gives no declaration or warranty on modification, suspension, cancellation, termination or abortion thereof, and shall not be held liable for legal actions or indemnity obligation arising thereof.

Manufacturer reserves the rights to restrict the use or access of certain content or service. As the content and service are transmitted through third party's network and transmission facilities, Manufacturer undertakes no customer service thereof or the obligation for such customer service.

### 【Statement】

- The pictures and instructions in this user manual are for reference only, and may be different from the actual product. Please subject to the actual product. (This statement is throughout this User Manual)

## Declaration



### Important Safety Precautions



Class I product: This symbol indicates that it requires a safety connection of protective earthing (ground).

### Disposal of Used Electrical & Electronic Equipment



Packaging and electrical goods should be recycled appropriately, and not treated as household waste. Please dispose of this equipment at your applicable collection point for the recycling of electrical & electronic equipment waste. By ensuring the correct disposal of this product, you will help prevent potentially hazardous to the environment and to human health, which could otherwise be caused by unsuitable waste handling of this product. The recycling of materials will help conserve natural resources. Please do not therefore dispose of your old electrical and electronic equipment with your household waste. For more detailed information about recycling of this product, please contact your local city office, your household waste disposal service or the shop where you purchased the product.

#### Stability Hazard

##### Warning!

The device set may fall, causing serious personal injury or death. To prevent injury, this device set must be securely attached to the wall in accordance with the installation instructions.

Environmental conditions	Operating temperature: 0°C ~ 40°C Operating humidity: 20%~80%RH Altitude 5000m
--------------------------	--

### Safeguards

#### Water and Moisture

Avoid dripping or splashing of liquids onto the product. Objects filled with liquids, such as vases, should not be placed on the product.

#### Object and Liquid Entry

Never push objects of any kind into this device through openings as they may touch dangerous voltage points or short-out parts that could result in fire or electric shock. Never spill liquid of any kind on or into the device.

**WARNING:** This product can expose you to chemicals including [Both Styrene and BPA] which are known to the State of California to Cause Cancer and Reproductive Harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

## Declaration

### Heat

The product should be situated away from heat sources such as radiators, heat registers, stoves, or other products (including amplifiers) that produce heat.

### Fire

The product should be situated away from naked flame sources such as lighted candle.

- ⚠** Incorrect replacement of the battery may lead to the risk, including the replacement of another similar or the same type. Do not expose batteries to heat such as sun or fire or something like that.
- ⚠** The device should not be exposed to dripping and spraying and it cannot be placed under objects filled with liquids.
- ⚠** MAIN plug on the power cord is used as the disconnect device, the disconnect device and socket-outlet shall be easily accessible.
- ⚠** Apparatus with CLASS I construction shall be connected to a MAINS socket outlet with a protective earthing connection.




## Start Guide

### Precautions for Installation


- As shown in the figure below, leave a ventilation space around the device.

When mounted on the wall:

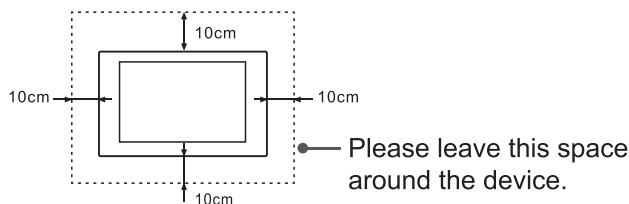

- Do not install the device as shown below.

Hinder air circulation




**Insufficient ventilation will overheat the device and may cause damage to the device and even fire.**

# Introduction

## 2. Introduction


### 2.1 Package Contents



WM6FE × 1



Stylus × 2




Remote Control




Battery × 2




User Manual of the Device




Wall Mount Bracket




Wall Mount Bracket  
Accessories bag



Power Cord (It depends on the  
models, regions, or countries.)



User Manual of Wireless  
Cast × 1 (Optional)




Wireless Cast (Optional)

#### NOTE

- The accessories may be different from the list above due to different models, countries / regions, please refer to the actual accessory bag.

## 2.2 Products View

### 2.2.1 Front Panel | Control Panel

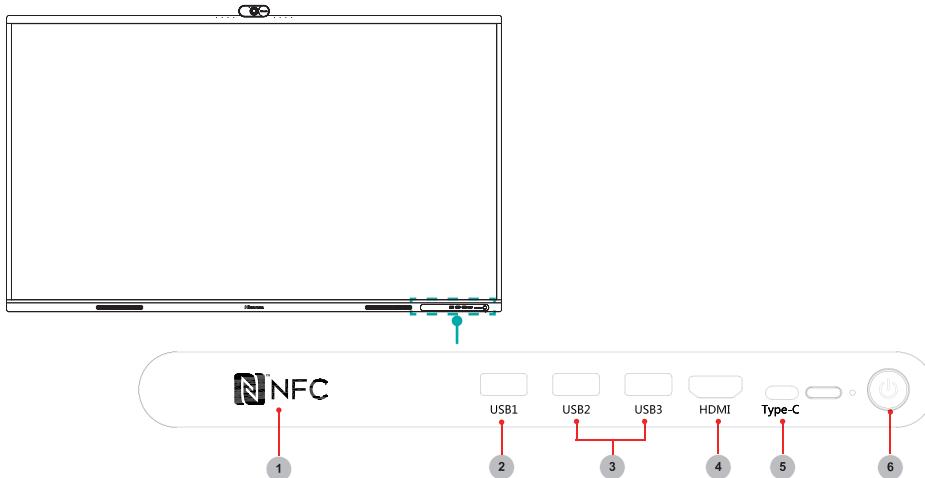


Number	Item	Description
1	NFC	When the mobile phone touches the device, it can achieve screen sharing through mobile phone NFC function.
2	USB2.0	It is a USB2.0 interface, which can be used as the media playback interface of the device and the USB2.0 interface of embedded OPS module. The USB2.0 port can also be used as an Android mic amplification.
3	USB3.0	It is a USB3.0 interface, which can be used as the media playback interface of the device and the USB3.0 interface of embedded OPS module.
4	HDMI IN	The front HDMI interface allows digital audio and video signals to be transmitted using a single cable without compression. HDMI supports multi-channel digital audio, and can be connected to external devices with HDMI port, such as computer host, set-top box, Blu-ray player, A/V device, etc.
5	Type-C	It is a full-featured Type-C interface, which supports audio, video, and file transmission. Support 65W PD quick charge and support the following specifications: 5V/3A, 9V/3A, 12V/3A, 15V/3A, 20V/3.25A.*
6	Standby button	When the device is on, long press the button to select the standby mode. When the device is on standby, press the button to start. The indicator light displays the state of power on or standby: <ul style="list-style-type: none"><li>• When the device is on, the light is blue.</li><li>• When standby, the light is red.</li><li>• When the device with OPS module is turned on, the light is green.</li></ul>

\*When 65WM6FE does not connect OPS, 65W PD quick charge is supported; when 65WM6FE connects OPS, 65W PD quick charge is not supported. When 75WM6FE and 86WM6FE connect OPS, 65W PD quick charge is supported.


## Introduction

### 2.2.2 Rear Panel | I/O Panel

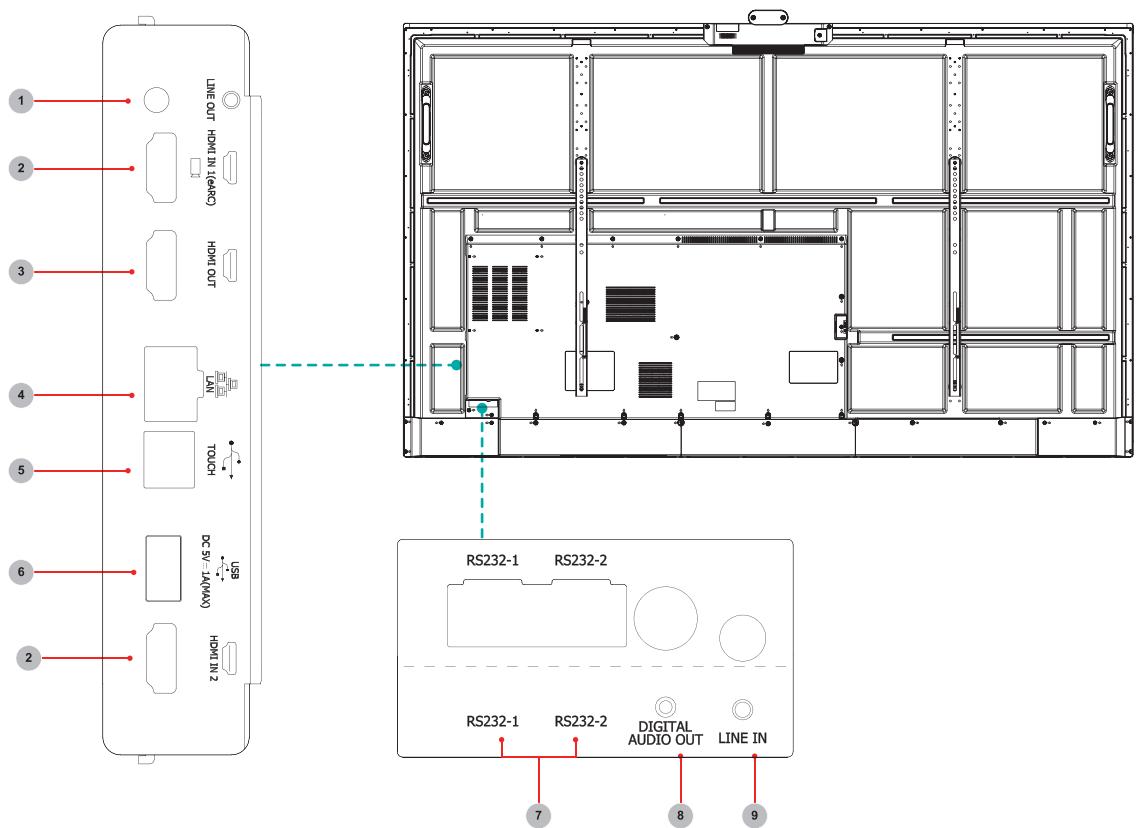

Number	Port	Description
1	LINE OUT	Audio out to Headphones
2	HDMI IN	HDMI signal input, connect to PC with HDMI output port, set-top box, or other video device
3	HDMI OUT	HDMI signal output, connect to an external device with HDMI input port
4	LAN	Standard RJ45 Internet connection interface
5	TOUCH	Touch signal output to external PC
6	USB 3.0	Connect USB devices such as hard disks, keyboard, mouse, etc
7	RS232-1/RS232-2	Serial interface, used for mutual transfer of data between devices
8	DIGITAL AUDIO OUT	Connect to power amplifier via coaxial port, then connect power amplifier to speaker
9	LINE IN	Input of audio signal

## 2.3 Remote Control

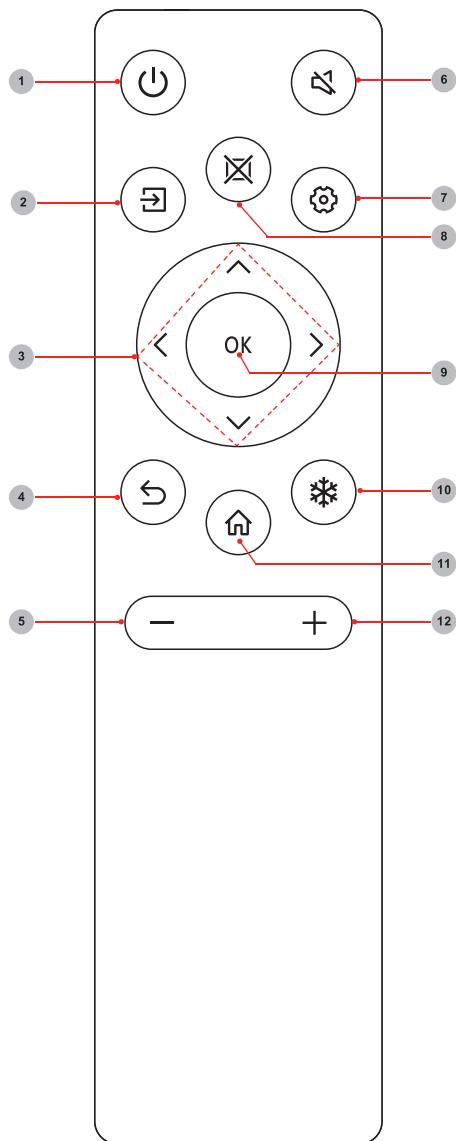

Number	Description
1	<b>Power</b> Enter/exit standby
2	<b>Source</b> Switching signal source
3	<b>▲/▼</b> Move focus up/down <b>◀/▶</b> Move focus left/right
4	<b>Back</b> Back to previous menu
5	<b>Volume down (-)</b>
6	<b>Mute</b> Activate/exit mute state
7	<b>Setting</b> Open the Settings menu
8	<b>Blank</b> Switch On/Off screen
9	<b>OK</b> Confirm operation
10	<b>Freeze</b> Once click: Keep the current screen
11	<b>Home</b> Enter home page
12	<b>Volume up (+)</b>

## Battery replacement method

1. Disconnect the battery cover from the remote control at the battery cover buckle and open the battery cover.
2. Insert two AAA 1.5V alkaline batteries. Note that the positive (+) and negative (-) terminals of the batteries must match the positive (+) and negative (-) terminals in the battery case.
3. Close the battery cover from top to bottom until it is fully aligned with the remote control.

## Precautions

1. If the remote control is not working properly, is unstable, or can't control the device, please replace the batteries.
2. If you do not use the remote control for a long time or the battery is exhausted, remove the battery. (Waste batteries pollute the environment and must be handled properly.)
3. In order to achieve the best remote control effect, please point the black launch window on the back of the remote control at the indicator light of the device.
4. Discard batteries in a designated disposal area. Do not throw them into a fire.
5. Remove old batteries immediately to prevent them from leaking into the battery compartment.
6. Battery chemicals can cause a rash. If the batteries leak, clean the battery compartment with a cloth. If chemicals touch your skin then wash it immediately.
7. Do not mix old and new batteries.
8. Do not mix alkaline, standard (carbon-zinc) or rechargeable (NiCd, NiMH, etc.) batteries.
9. Do not continue using the remote if it gets warm or hot.
10. If any of these issues occur, call our Support Center immediately on the support website.

## Effective range

1. Remote control distance: The distance from the front of the remote control is valid within 8m.
2. Remote control angle: With the remote control receiving window of the device as the apex, the angle in horizontal direction at the distance of 6m is at least  $\pm 30^\circ$ , and the angle in vertical direction is at least  $\pm 15^\circ$ .

### 2.4 Low Blue Light Mode

The low blue light mode reduces the risk of blue light to the human body by reducing harmful blue light.

#### How to enter low blue light mode?


The homepage-> "Setting"-> "Image"-> "Eye protection mode"-> open.

#### [Description]

- The machine can meet the requirements for low blue light certification only if the eye protection mode is turned on in the factory default state.
- Proper rest and exercise has proven to be effective in reducing eye fatigue.
- To relieve eye fatigue and protect your health, we recommend:
  - Taking breaks frequently during viewing the screen
  - Increasing outdoor activities
  - Overlooking distant objects
  - Doing eye exercises
  - The optimal viewing distance is 3 times the vertical height of the display screen

## 3. Installation Guide

### 3.1 Wall Mount Kit Specifications (VESA)

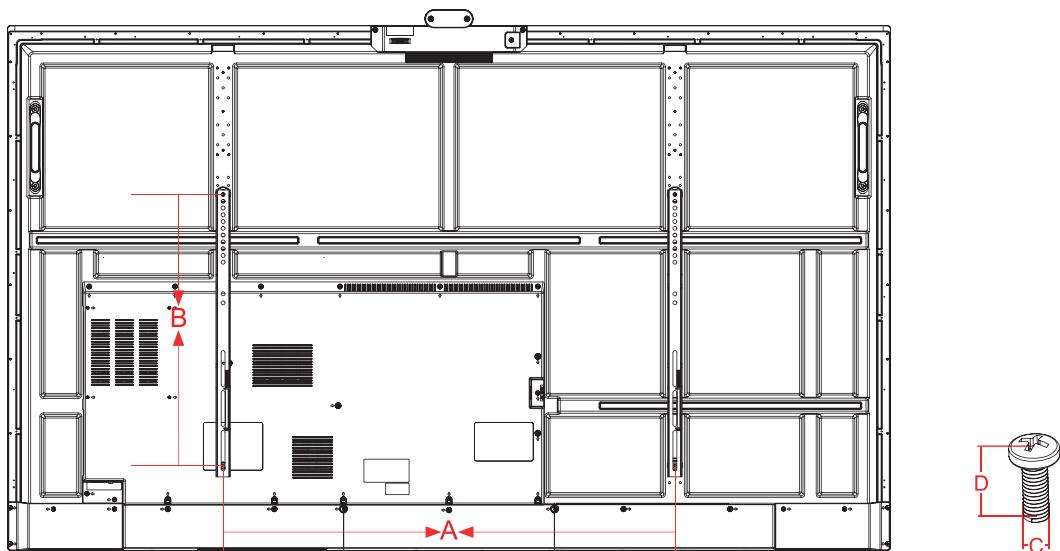

Model	VESA Spec. (A × B)	Standard Screw (C × D)	Quantity
65WM6FE	600 × 400mm	M8 × 25	4
75WM6FE	600 × 600mm	M8 × 25	4
86WM6FE	1000 × 600mm	M8 × 25	4

#### NOTE

Do not use screws that are longer than the standard dimension, as they may cause damage to the inside of the display.

## 3.2 Installing the OPS (Optional)


Before installing and operating OPS, it is required to carefully read the instructions that come with OPS computer and this instruction manual.

### Installation Sequence

1. The touch screen is set to the "off" state, and the indicator light is off.
2. The operator wears anti-static gloves and takes out OPS computer.
3. Assembly steps for OPS computer:

(1) This product is compatible with OPS-C Plus interface computer, and assembly instructions are as follows:

**Note:** Different models of touch screen and computer brackets have different shapes, but the assembly method is the same.

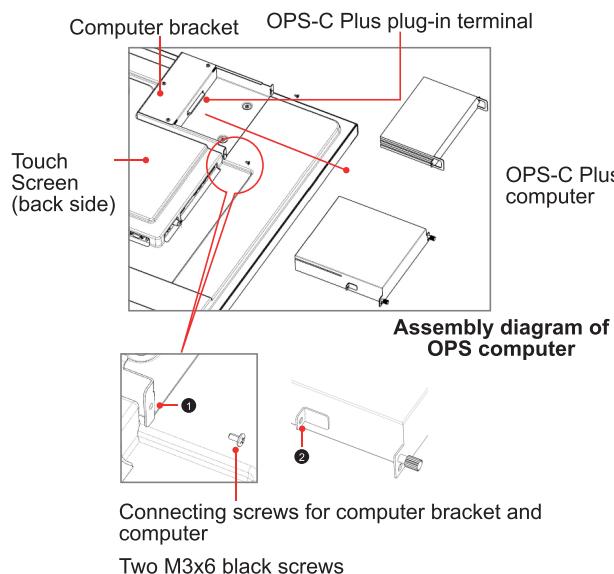


① is located at the computer bracket and the connecting screw of computer, which can be matched with ②.

② It is the hanging nose, where OPS-C Plus computer is assembled with fastening screws.

There are a total of two hanging noses, which are placed in OPS-C Plus computer package as an accessory and there is need to assemble them on OPS-C Plus computer in advance.

Before assembling the computer, please check the shape of OPS-C Plus plug-in terminal, which should meet the requirements in the following Figure:

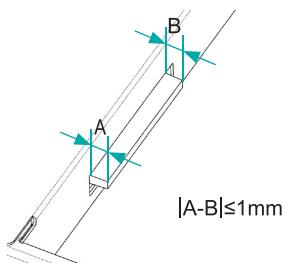


Instructions for OPS terminal assembly  
tolerances

(2) Instructions for assembly routes:

- Place the touch screen vertically or place the touch screen face-down stably, and make sure there is enough room for operation around the computer bracket on the back of screen.
- Remove M3x6 screw reserved at ① for standby application.
- Insert OPS-C Plus computer into the computer bracket along the route as shown in the Figure until ② and ① are in close contact.
- Apply spare screws M3x6 to fasten the computer (some computer models come with screws that can be used directly), tightening torque:  $0.5 \text{ N}\cdot\text{m} < M < 0.8 \text{ N}\cdot\text{m}$ .

(3) The pattern after assembly is as follows:

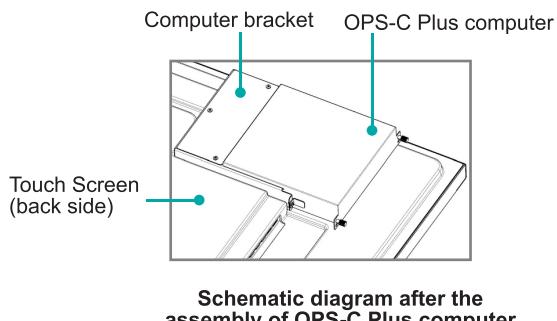

Schematic diagram after the  
assembly of OPS-C Plus computer

(4) Precautions after assembly:


- After the computer is installed, ② and ① should be closely fitted (same on the left and right sides).
- Screws are firmly and securely fastened. The computer doesn't shake.

4. After the above steps are completed, screen can be switched on. After startup, OPS computer is started, and the operating system interface is performed to confirm that there is no abnormality. The first startup is completed.

## 4. Making Connections

### ▶ Connect to external audio device

Digital audio output: connect to power amplifier via coaxial port, then connect power amplifier to speaker.

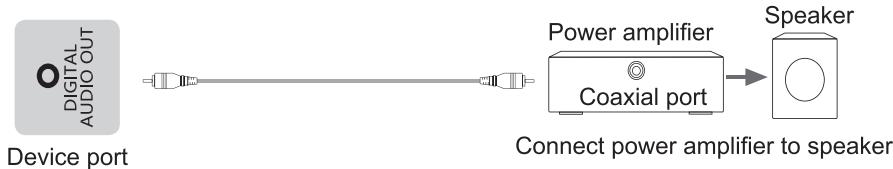

### ▶ Connect to HDMI input

Connect the HDMI input connector of the device to the HDMI output port of an external device.



#### ▣ NOTE

The supported signal formats of the HDMI port refer to Specifications.

It is recommended that HDMI2.0 4K HD wire should be used. The wire length should be less than 10m. When using other non-standard wires, malfunctions caused by signal transmission problems attributable to the wire quality problem may occur.

### ▶ Connect to HDMI output

Connect the HDMI output connector of the device to the HDMI input port of an external device.



#### ▣ NOTE

When using it as a screen monitor, carefully read precautions for still image of the device.

### ▶ Connect to TOUCH interface device

It is the touch screen interface used for an external PC as touch host. In the HDMI channel, the device is used as a touch unit by default

When connecting, USB cables not longer than 1 meter should be used to connect with the external PC.



## ► Setting of the USB,touch and audio & video return transmission function

When you need to use an external PC as the USB host,touch host, audio & video host and signal source host, setting can be achieved by the following two methods.

Method 1. Connect the main screen and PC with one full-functional Type-C wire and switch the signal source to Type-C channel.

Method 2. Use one Touch-USB (one end is type-B male connector, and the other end is type-A male connector) connecting wire and one HDMI signal wire for connection. Touch-USB wire connects the Touch port on the main screen side and the USB port of the PC. HDMI signal wire connects the HDMI port of the main screen and the PC, and the signal source is switched into the corresponding HDMI channel.

After setting, the external PC can be operated via the touch screen. The external PC can also invoke the camera, microphone and USB peripherals of the main screen.

### ▣ NOTE

It is recommended that full-functional Type-C wire certified by USB-IF Association should be used. The wire length should be less than 2m. When using other non-standard wires, malfunctions caused by signal transmission problems attributable to the wire quality problem may occur.

## ► LINE OUT Connect Headphone for audio out of the screen.



Device port

### ATTENTION

Excessive sound pressure from earphones and headphones can cause hearing loss.

### ▣ NOTE


Please make sure that the headphones you plug in is without microphone function, or it may not be supported.

## ► Connect to a USB interface device

The total current of all the USB output ports of the device when connected to external devices at the same time mustn't exceed 3500mA, or else the device failure caused by overcurrent isn't covered by the warranty.



Device port



External device


### ▣ NOTE

This device is connected to wireless keyboard and mouse devices. If there is any insensitivity phenomenon during use, you can try to change the wireless receiver to another USB port, or use a USB extension cord to connect the wireless receiver in order to enhance the receiving range.

## ► Connect to a network

Enter the **Settings** menu and select the **Network** item.


### ● WIFI

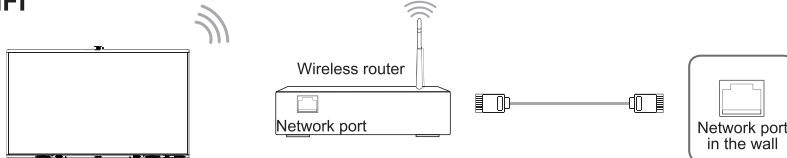

The device can receive network signals directly through a Wireless router

- The available wireless network list is automatically displayed when WIFI is selected.
- Select an available network, enter the password, and tap Connect. If the selected network is not encrypted, you can connect directly.
- If the network you want to connect to is not displayed in the list, tap Refresh to display more networks. If the network you want is still not displayed after this operation, tap Add Network and enter the network name manually, select the corresponding encryption method according to router settings, enter the password, and tap Confirm.

### ● Ethernet

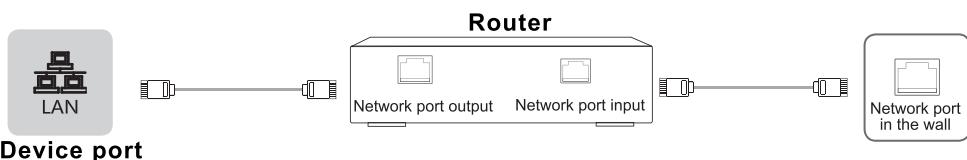

#### Device port

##### • Ethernet: auto

The device automatically obtains an IP address and connects to the network. If failure, repeat the operation again or choose Ethernet:manual.

##### • Ethernet: manual

Manually enter the IP Address, Subnet Mask, DNS Server and Gateway.

## ► Connect to the OPS interface device

OPS (Open Pluggable Specification) is the interface specification developed by INTEL which is applicable to embedded computer module products. With this interface, the screen can be connected to the device in compliance with OPS interface specification, which is short for OPS module. You can buy the module and conduct secondary development in accordance with your requirements.


This product can provide the OPS module with  $18V \pm 0.5V$  (5A MAX) power supply.

### ☒ NOTE

After installing OPS module, when the signal source is in computer channel, device touch screen regards OPS as the touch unit by default. After TOUCH is connected with an external computer, the external computer is used as the touch unit. At this time, the signal source should be switched to the channel of the external computer for using the touch functionality.

## Making Connections

You should purchase the OPS module which is applicable to the size of the device OPS. The size of OPS refers to the following figure:

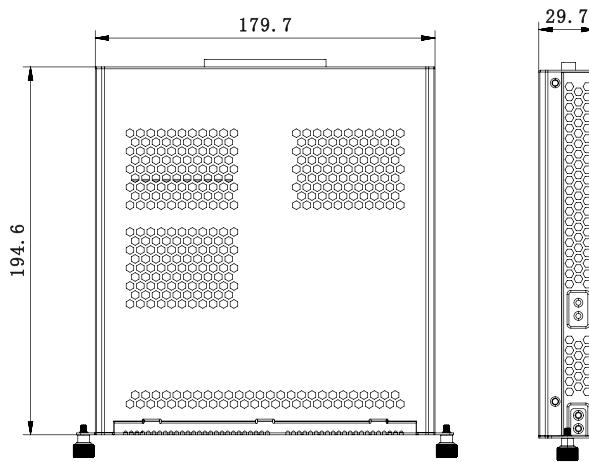

### [Instructions]

- After installing the OPS module, when the signal source adopts the computer channel, the touch screen of the complete machine uses OPS as the touch host by default. After Touch connects the external computer, the external computer serves as the touch host, and the signal source should be switched to the display channel of the external computer for touch.
- To guarantee stable operation of the complete machine and the OPS module, please purchase the right type of OPS module. Otherwise, the OPS module cannot work normally because the failure to adapt structures and software.


### • Switching on/off the OPS

After inserting OPS to the device, you turn on the device, change the signal source to enter OPS and stays on the OPS system interface. When you turn off the device, you should use the standby button to go into standby mode, the OPS module is switched off, and then you shut off the device.


## Making Connections

### • Connect to RS232 port

This machine contains two Internet access-type RS232 ports, i.e. RS232-1 and RS232-2. Development should apply the adapter cable for conversion from Internet access to DB9 female head. Secondary development should be performed according to the user's protocol to realize serial port control of this machine.

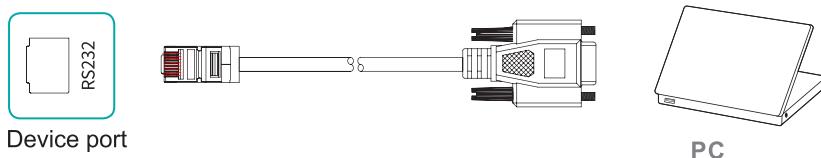

TX/RX wire sequence inside RS232-1 port and RS232-2 port of this machine is different. The requirements for sequence of the connecting wire for conversion from Internet access to DB9 is shown in the following table:

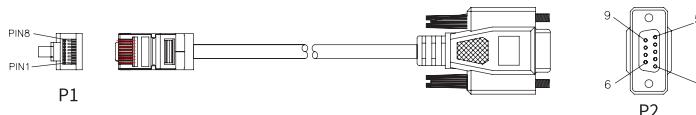

### RS232-1

Internet access end P1	Connecting wire	DB9 female head P2
Pin3-GND	-	Pin5-GND
Pin5-TX	-	Pin2-RXD
Pin8-RX	-	Pin3-TXD

### RS232-2

Internet access end P1	Connecting wire	DB9 female head P2
Pin3-GND	-	Pin5-GND
Pin5-RX	-	Pin3-TXD
Pin8-TX	-	Pin2-RXD

## Appendix

### 5. Appendix

#### 5.1 Specification

Features, appearance and specifications are subject to change without notice.

Product name	Interactive Digital Board	
Model	65WM6FE	
Size(mm) (W×H×D) excluding base	1488 × 935 × 122	
Weight(kg) excluding base	35.0	
Visual picture diagonal size (cm)	164	
Power supply	100-240V ~ 50/60Hz 3.3A	
Wireless LAN Module specifications	Frequency Range	2.4~2.4835GHz 5.15~5.85GHz
	Output Power (Max.)	2.4G 17dBm 5G 15dBm
Display resolution	3840 × 2160	
Speaker power	18W *2 + 25W	
Environmental conditions	Operating temperature 0°C ~ 40°C	
	Operating humidity 20% ~ 80%RH	
	Altitude 5000m	

Product name	Interactive Digital Board	
Model	75WM6FE	
Size(mm) (W×H×D) excluding base	1710 × 1060 × 126	
Weight(kg) excluding base	45.8	
Visual picture diagonal size (cm)	189	
Power supply	100-240V ~ 50/60Hz 4.4A	
Wireless LAN Module specifications	Frequency Range	2.4~2.4835GHz 5.15~5.85GHz
	Output Power (Max.)	2.4G 17dBm 5G 15dBm
Display resolution	3840 × 2160	
Speaker power	18W *2 + 25W	
Environmental conditions	Operating temperature 0°C ~ 40°C	
	Operating humidity 20% ~ 80%RH	
	Altitude 5000m	

## Appendix

Product name	Interactive Digital Board				
Model	86WM6FE				
Size(mm) (W×H×D) excluding base	1955 × 1198 × 126				
Weight(kg) excluding base	59.0				
Visual picture diagonal size (cm)	217				
Power supply	100-240V ~ 50/60Hz 5.2A				
Wireless LAN Module specifications	Frequency Range	2.4~2.4835GHz 5.15~5.85GHz			
	Output Power (Max.)	2.4G 17dBm 5G 15dBm			
Display resolution	3840 × 2160				
Speaker power	18W *2 + 25W				
Environmental conditions	Operating temperature 0°C ~ 40°C Operating humidity 20% ~ 80%RH Altitude 5000m				

The supported video formats are as follows:

Encapsulation	Video decoding				Audio decoding
	Type	Resolution(Max)	Bit rate(Max)	Frame rate(Max)	
.mkv .mp4 .mov	AV1	3840x2160	26.4Mbps	60fps	Dolby Audio, AAC MPEG1(Layer 1,2,3)
.avi .mpg .ts	MPEG2	1920x1080	40Mbps	60fps	Dolby Audio, AAC MPEG1(Layer 1,2,3)
.ts .mkv .avi. mp4 .flv	H.264	3840x2160	100Mbps	30fps	Dolby Audio, AAC MPEG1(Layer 1,2,3)
.avi .mpg .mov	MPEG4	1920x1080	40Mbps	60fps	Dolby Audio, AAC MPEG1(Layer 1,2,3)
.ts .mkv .mp4	H.265	3840x2160	97.7Mbps	60fps	Dolby Audio, AAC MPEG1(Layer 1,2,3)

Dolby Audio: Support Dolby Digital, and Dolby Digital Plus.

**NOTE**

Formats listed above may not all supported by the device as video making tools are not unified.

## Appendix

Signal formats supported by HDMI port	
RGB/60Hz	640 × 480, 800 × 600, 1024 × 768
YUV/50Hz	576i, 576p, 720p, 1080i, 1080p, 2160p
YUV/60Hz	480i, 480p, 720p, 1080i, 1080p, 2160p
YUV/24Hz 25Hz 30Hz	3840 × 2160, 4096 × 2160
YUV420/50Hz 60Hz	3840 × 2160, 4096 × 2160
YUV444/50Hz 60Hz	3840 × 2160, 4096 × 2160
RGB444/50Hz 60Hz	3840 × 2160, 4096 × 2160

### ▣ NOTE

HDMI standard and HDMI enhance are supported by the device. HDMI enhance (side HDMI) is the default, which supports all formats listed above. HDMI standard only supports part of formats listed above. If HDMI enhance is needed, you can tab menu under HDMI Version and select HDMI enhance.

### 5.2 Other Information

#### Recycling/Licenses

##### WEEE (Waste Electronic Electric Equipment) European Directive 2012/19/EU



This symbol on the product or on its packaging indicates that this product must not be disposed of with your household waste. Instead, it is your responsibility to dispose of your waste equipment by handing it over to a designated collection point for the recycling of waste electrical and electronic equipment. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local city office, your household waste disposal service or the shop where you purchased the product.

#### Batteries



In accordance with the Battery Directive, used batteries should not be disposed of in the domestic waste. Dispose your batteries in the collection containers specific for this purpose in retail stores.

##### RoHS (Restriction of Hazardous Substance) European Directive 2011/65/EU



This European directive limits the use of dangerous and hazardous substances which are difficult to recycle.

This allows recycling easily the EEE and contributes to the safeguard of the environment.

Substances included in this product match to the RoHS directive.



The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.



ENERGY STAR qualified model only

Your Signage product is ENERGY STAR qualified in its factory default setting.

Change to certain features, settings and functionality in this product can change the power consumption, possibly beyond the limits required for ENERGY STAR qualification.

Refer to [www.energystar.gov](http://www.energystar.gov) for more information of the ENERGY STAR Program.

**WARNING:** This set must not be opened unless by a qualified technician.

**WARNUNG:** Dieses Set darf nur von einem qualifizierten Techniker geöffnet werden.

**VAROVÁNÍ:** Toto zařízení nesmí být otevřeno, pokud není otevřeno kvalifikovanými techniky.

**VAROVANIE:** Toto zariadenie neotvárajte, pokial' nemáte kvalifikovaného technika.

**AVERTIZARE:** Nu deschideți acest echipament decât dacă aveți un tehnician calificat.

**OPOZORILO:** Tega kompleta ne smete odpirati, odpreti ga sme samo usposobljen tehnik.

**UPOZORENJE:** Ovaj se uređaj ne smije otvoriti ako ga nije otvorio kvalificirani tehničar.

**ΠΡΟΕΙΔΟΠΟΙΗΣΗ:** Μην ανοίγετε τη συσκευή εκτός αν το ανοίξετε από ειδικευμένο τεχνικό.

**AVERTISSEMENT :** Cet ensemble ne doit être démarré que par un technicien qualifié.

**ATTENZIONE:** Non aprire la unità a meno che non sia stato eseguito da un tecnico qualificato.

**ADVERTENCIA:** Este conjunto no debe abrirse a menos que lo haga un técnico calificado.

**AVISO:** Este conjunto não pode ser aberto a menos que por um técnico qualificado.

**ПРЕДУПРЕЖДЕНИЕ:** Това устройство не трябва да се отваря, освен ако не е отворено от квалифицирани техници.

**FIGYELEM:** Csak akkor nyissa ki ezt az eszközt, ha képzett szakemberrel rendelkezik.

**WAARSCHUWING:** Deze set mag niet worden geopend, alleen door een gekwalificeerde technicus.

**OSTRZEŻENIE:** Nie otwieraj tego urządzenia bez wykwalifikowanego technika.

Cet appareil et son boîtier conformément à la partie 15 des Règles de la FCC. Le fonctionnement est soumis aux deux conditions suivantes:

- (1) Cet appareil ne doit pas causer d'interférences nuisibles et
- (2) Cet appareil doit accepter toute interférence reçue, y compris les interférences susceptibles de causer un fonctionnement indésirable.

### 5.3 Certification and Compliance

#### Regulatory Compliance Statements

**NOTE:** The following warnings only apply to products with such certification.

#### FCC Regulatory Compliance Statements

**Compliance Statement:** This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

**NOTE:** This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

**Caution:** The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

#### Radiation Exposure Statement of Set

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of [20] cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

#### Radiation Exposure Statement of Remote Control

This equipment complies with the FCC portable RF exposure limit set forth for an uncontrolled environment and are safe for intended operation as described in this manual. The further RF exposure reduction can be achieved if the product can be kept as far as possible from the user body or set the device to lower output power if such function is available.

#### ISED Regulatory Compliance Statements

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage;
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

## Appendix

### Radiation Exposure Statement of Set

This equipment complies with ISED RSS-102 radio frequency exposure limits set forth by the Innovation, Science and Economic Development Canada for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 cm between the device and the user or bystanders. This device must not be co-located or operating in conjunction with any other antenna or transmitter.

L'appareil est conforme aux limites d'exposition aux radiofréquences du CNR - 102 d'ISDE établies par innovation, sciences et développement économique Canada pour les environnements non contrôlés. Cet appareil doit être installé et utilisé de telle sorte que la distance minimale entre l'appareil et l'utilisateur ou le spectateur soit de 20 cm. L'appareil ne doit pas coexister ou fonctionner conjointement avec une autre antenne ou un autre émetteur.

### Radiation Exposure Statement of Remote Control

This equipment complies with the ISED portable RF exposure limit set forth for an uncontrolled environment and are safe for intended operation as described in this manual. The further RF exposure reduction can be achieved if the product can be kept as far as possible from the user body or set the device to lower output power if such function is available.

L'appareil est conforme aux limites d'exposition aux RF portatives d'ISDE, convient aux environnements non contrôlés et peut être utilisé en toute sécurité comme prévu dans ce manuel. Une réduction supplémentaire de l'exposition aux RF peut être obtenue si le produit peut être placé aussi loin que possible du corps de l'utilisateur, ou si une telle fonction est disponible, l'appareil peut être réglé à une puissance de sortie inférieure.

### Declaration of conformity

Trade Name: Hisense

Model: 65WM6FE

Responsible Party: Hisense USA Corporation

Service Address: 105 Satellite BLVD Suite I, Suwanee, GA 30024

Service Phone Number: 1-888-935-8880

Trade Name: Hisense

Model: 75WM6FE

Responsible Party: Hisense USA Corporation

Service Address: 105 Satellite BLVD Suite I, Suwanee, GA 30024

Service Phone Number: 1-888-935-8880

Trade Name: Hisense

Model: 86WM6FE

Responsible Party: Hisense USA Corporation

Service Address: 105 Satellite BLVD Suite I, Suwanee, GA 30024

Service Phone Number: 1-888-935-8880

## Appendix

### 5.4 EU Declaration of conformity (DoC)

#### EU Declaration of conformity (DoC)

Unique identification of this DoC: HCD-DOC-20250317-001

We, Declare under our sole responsibility that the product:

Product Name: Interactive Digital Board

Trade Name: Hisense

Model: 65WM6FE

**To which this declaration relates is in conformity with the essential requirements and other relevant requirements of the radio equipment directive(2014/53/EU), Ecodesign Directive(2009/125/EC)& Regulation (EU) 2019/2021, ROHS Directive (2011/65/EU). The product is in conformity with the following standards and /or other normative documents:**

Health & Safety (Art. 3(1)(a)): EN IEC 62311:2020  
EN IEC 62368-1:2020+A11:2020

EMC (Art. 3(1)(b)): EN 55032:2015  
EN 55032:2015/A11:2020  
EN 55035:2017  
EN 55035:2017/A11:2020  
EN IEC 61000-3-2:2019/A1:2021  
EN 61000-3-3:2013/A2:2021  
ETSI EN 301 489-1 V2.2.3(2019-11)  
ETSI EN 301 489-17 V3.3.1(2024-09)

Spectrum (Art. 3(2)): ETSI EN 300 328 V2.2.2(2019-07)  
ETSI EN 301 893 V2.1.1(2017-05)  
ETSI EN 300 440 V2.1.1(2018-07)

ErP: Transitional Test Method for Ecodesign and Energy Labelling requirements for electronic displays

RoHS: IEC 63000:2018

Software \*65.V0000.WM6.FE.00.01W.P0317

\*The company reserves the right to install updated Software versions to improve the performance of the appliance.

Place and date of issue (of this DoC): QingDao 2025/03/17

Signed by or for the manufacturer: Hisense Commercial Display Co.,Ltd.

Address: No. 218, Qianwangang Road, Huangdao District, Qingdao, Shandong, P.R. China

Title: Product manager

Name (in print):

Yin Xiaoyu

#### EPREL Registration Information

Model identifier	Eprel registration number
65WM6FE	2303402

# Appendix

## EU Declaration of conformity (DoC)

Unique identification of this DoC: HCD-DOC-20250317-002

We, Declare under our sole responsibility that the product:

Product Name: Interactive Digital Board

Trade Name: Hisense

Model: 75WM6FE

**To which this declaration relates is in conformity with the essential requirements and other relevant requirements of the radio equipment directive(2014/53/EU), Ecodesign Directive(2009/125/EC)& Regulation (EU) 2019/2021, ROHS Directive (2011/65/EU). The product is in conformity with the following standards and /or other normative documents:**

Health & Safety (Art. 3(1)(a)): EN IEC 62311:2020  
EN IEC 62368-1:2020+A11:2020

EMC (Art. 3(1)(b)): EN 55032:2015  
EN 55032:2015/A11:2020  
EN 55035:2017  
EN 55035:2017/A11:2020  
EN IEC 61000-3-2:2019/A1:2021  
EN 61000-3-3:2013/A2:2021  
ETSI EN 301 489-1 V2.2.3(2019-11)  
ETSI EN 301 489-17 V3.3.1(2024-09)

Spectrum (Art. 3(2)): ETSI EN 300 328 V2.2.2(2019-07)  
ETSI EN 301 893 V2.1.1(2017-05)  
ETSI EN 300 440 V2.1.1(2018-07)

ErP: Transitional Test Method for Ecodesign and Energy Labelling requirements for electronic displays

RoHS: IEC 63000:2018

Software \*75.V0000.WM6.FE.00.01W.P0317

\*The company reserves the right to install updated Software versions to improve the performance of the appliance.

**Place and date of issue (of this DoC): QingDao 2025/03/17**

**Signed by or for the manufacturer: Hisense Commercial Display Co.,Ltd.**

**Address: No. 218, Qianwangang Road, Huangdao District, Qingdao, Shandong, P.R. China**

**Title: Product manager** **Name (in print):**

*Yin Xiaoyu*

## EPREL Registration Information

Model identifier	Eprel registration number
75WM6FE	2303404

# Appendix

## EU Declaration of conformity (DoC)

Unique identification of this DoC: HCD-DOC-20250317-003

We, Declare under our sole responsibility that the product:

Product Name: Interactive Digital Board

Trade Name: Hisense

Model: 86WM6FE

**To which this declaration relates is in conformity with the essential requirements and other relevant requirements of the radio equipment directive(2014/53/EU), Ecodesign Directive(2009/125/EC)& Regulation (EU) 2019/2021, ROHS Directive (2011/65/EU). The product is in conformity with the following standards and /or other normative documents:**

Health & Safety (Art. 3(1)(a)): EN IEC 62311:2020  
EN IEC 62368-1:2020+A11:2020

EMC (Art. 3(1)(b)): EN 55032:2015  
EN 55032:2015/A11:2020  
EN 55035:2017  
EN 55035:2017/A11:2020  
EN IEC 61000-3-2:2019/A1:2021  
EN 61000-3-3:2013/A2:2021

ETSI EN 301 489-1 V2.2.3(2019-11)  
ETSI EN 301 489-17 V3.3.1(2024-09)

Spectrum (Art. 3(2)): ETSI EN 300 328 V2.2.2(2019-07)  
ETSI EN 301 893 V2.1.1(2017-05)  
ETSI EN 300 440 V2.1.1(2018-07)

ErP: Transitional Test Method for Ecodesign and Energy Labelling requirements for electronic displays

RoHS: IEC 63000:2018

Software \*86.V0000.WM6.FE.00.01W.P0317

\*The company reserves the right to install updated Software versions to improve the performance of the appliance.

**Place and date of issue (of this DoC): QingDao 2025/03/17**

**Signed by or for the manufacturer: Hisense Commercial Display Co.,Ltd.**

**Address: No. 218, Qianwangang Road, Huangdao District, Qingdao, Shandong, P.R. China**

**Title: Product manager** **Name (in print):**

*Yin Xiaoyu*

## EPREL Registration Information

Model identifier	Eprel registration number
86WM6FE	2303405

## Appendix

### 5.5 UK Declaration of conformity (DoC)

#### UK Declaration of conformity (DoC)

Unique identification of this DoC: HCD-DOC-20250317-004

We, Declare under our sole responsibility that the product:

Product Name: Interactive Digital Board

Trade Name: Hisense

Model: 65WM6FE

**To which this declaration relates is in conformity with the essential requirements and other relevant requirements of the Radio Equipment Regulations 2017(SI 2017/1206), The Ecodesign for Energy-related Products Regulations 2010, Ecodesign for Energy-related Products and Energy Information Regulations 2021 (with respect to Ecodesign Requirements for Electronic Displays)& The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012. The product is in conformity with the following standards and /or other normative documents:**

Health & Safety (Art. 6(1)(a)): BS EN IEC 62311:2020

EN IEC 62368-1:2020+A11:2020

BS EN IEC 62368-1:2020+A11:2020

EMC (Art. 6(1)(b)): EN 55032:2015

EN 55032:2015/A11:2020

BS EN 55032:2015

BS EN 55032:2015+A11:2020

EN 55035:2017

EN 55035:2017/A11:2020

BS EN 55035:2017

BS EN 55035:2017+A11:2020

EN IEC 61000-3-2:2019/A1:2021

BS EN IEC 61000-3-2:2019+A1:2021

EN 61000-3-3:2013/A2:2021

BS EN 61000-3-3:2013+A2:2021

ETSI EN 301 489-1 V2.2.3(2019-11)

ETSI EN 301 489-17 V3.3.1(2024-09)

Spectrum (Art. 6(2)): ETSI EN 300 328 V2.2.2(2019-07)

ETSI EN 301 893 V2.1.1(2017-05)

ETSI EN 300 440 V2.1.1(2018-07)

ErP: Transitional Test Method for Ecodesign and Energy Labelling requirements for electronic displays

RoHS: IEC 63000:2018

Software \*65.V0000.WM6.FE.00.01W.P0317

\*The company reserves the right to install updated Software versions to improve the performance of the appliance.

**Place and date of issue (of this DoC): QingDao 2025/03/17**

**Signed by or for the manufacturer: Hisense Commercial Display Co.,Ltd.**

**Address: No. 218, Qianwangang Road, Huangdao District, Qingdao, Shandong, P.R. China**

**Title: Product manager**

UK Local Representative

Alltrade Ltd.

Sussex House Business Park,274 Old Shoreham Road,

BRIGHTON & HOVE, BN3 7EU

**Name (in print):**

*Yin Xiaoyu*

# Appendix

## UK Declaration of conformity (DoC)

Unique identification of this DoC: HCD-DOC-20250317-005

We, Declare under our sole responsibility that the product:

Product Name: Interactive Digital Board

Trade Name: Hisense

Model: 75WM6FE

**To which this declaration relates is in conformity with the essential requirements and other relevant requirements of the Radio Equipment Regulations 2017(SI 2017/1206), The Ecodesign for Energy-related Products Regulations 2010, Ecodesign for Energy-related Products and Energy Information Regulations 2021 (with respect to Ecodesign Requirements for Electronic Displays)& The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012. The product is in conformity with the following standards and /or other normative documents:**

Health & Safety (Art. 6(1)(a)): BS EN IEC 62311:2020  
EN IEC 62368-1:2020+A11:2020  
BS EN IEC 62368-1:2020+A11:2020

EMC (Art. 6(1)(b)): EN 55032:2015  
EN 55032:2015/A11:2020  
BS EN 55032:2015  
BS EN 55032:2015+A11:2020  
EN 55035:2017  
EN 55035:2017/A11:2020  
BS EN 55035:2017  
BS EN 55035:2017+A11:2020  
EN IEC 61000-3-2:2019/A1:2021  
BS EN IEC 61000-3-2:2019+A1:2021  
EN 61000-3-3:2013/A2:2021  
BS EN 61000-3-3:2013+A2:2021  
ETSI EN 301 489-1 V2.2.3(2019-11)  
ETSI EN 301 489-17 V3.3.1(2024-09)

Spectrum (Art. 6(2)): ETSI EN 300 328 V2.2.2(2019-07)  
ETSI EN 301 893 V2.1.1(2017-05)  
ETSI EN 300 440 V2.1.1(2018-07)

ErP: Transitional Test Method for Ecodesign and Energy Labelling requirements for electronic displays

RoHS: IEC 63000:2018

Software \*75.V0000.WM6.FE.00.01W.P0317

\*The company reserves the right to install updated Software versions to improve the performance of the appliance.

**Place and date of issue (of this DoC): QingDao 2025/03/17**

**Signed by or for the manufacturer: Hisense Commercial Display Co.,Ltd.**

**Address: No. 218, Qianwangang Road, Huangdao District, Qingdao, Shandong, P.R. China**

**Title: Product manager**

**Name (in print):**

UK Local Representative

Alltrade Ltd.

Sussex House Business Park,274 Old Shoreham Road,

BRIGHTON & HOVE,BN3 7EU

*Yin Xiaoyu*

# Appendix

## UK Declaration of conformity (DoC)

Unique identification of this DoC: HCD-DOC-20250317-006

We, Declare under our sole responsibility that the product:

Product Name: Interactive Digital Board

Trade Name: Hisense

Model: 86WM6FE

**To which this declaration relates is in conformity with the essential requirements and other relevant requirements of the Radio Equipment Regulations 2017(SI 2017/1206), The Ecodesign for Energy-related Products Regulations 2010, Ecodesign for Energy-related Products and Energy Information Regulations 2021 (with respect to Ecodesign Requirements for Electronic Displays)& The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012. The product is in conformity with the following standards and /or other normative documents:**

Health & Safety (Art. 6(1)(a)): BS EN IEC 62311:2020

EN IEC 62368-1:2020+A11:2020

BS EN IEC 62368-1:2020+A11:2020

EMC (Art. 6(1)(b)): EN 55032:2015

EN 55032:2015/A11:2020

BS EN 55032:2015

BS EN 55032:2015+A11:2020

EN 55035:2017

EN 55035:2017/A11:2020

BS EN 55035:2017

BS EN 55035:2017+A11:2020

EN IEC 61000-3-2:2019/A1:2021

BS EN IEC 61000-3-2:2019+A1:2021

EN 61000-3-3:2013/A2:2021

BS EN 61000-3-3:2013+A2:2021

ETSI EN 301 489-1 V2.2.3(2019-11)

ETSI EN 301 489-17 V3.3.1(2024-09)

Spectrum (Art. 6(2)): ETSI EN 300 328 V2.2.2(2019-07)

ETSI EN 301 893 V2.1.1(2017-05)

ETSI EN 300 440 V2.1.1(2018-07)

ErP: Transitional Test Method for Ecodesign and Energy Labelling requirements for electronic displays

RoHS: IEC 63000:2018

Software \*86.V0000.WM6.FE.00.01W.P0317

\*The company reserves the right to install updated Software versions to improve the performance of the appliance.

**Place and date of issue (of this DoC): QingDao 2025/03/17**

**Signed by or for the manufacturer: Hisense Commercial Display Co.,Ltd.**

**Address: No. 218, Qianwangang Road, Huangdao District, Qingdao, Shandong, P.R. China**

**Title: Product manager**

**Name (in print):**

UK Local Representative

Alltrade Ltd.

Sussex House Business Park,274 Old Shoreham Road,

BRIGHTON & HOVE, BN3 7EU

*Yin Xiaoyu*

## Troubleshooting

### 6. Troubleshooting

Before preparing for repair, check according to the table below to see if you can find the cause of the problem.

If you strictly follow the instructions but still can't resolve the problem, you can turn to professional servicemen for help.

Problem	Solution
<b>No sound or picture</b>	<ul style="list-style-type: none"><li>Check if the power cord is connected to the wall outlet, and if the wall outlet is energized.</li><li>Check if you have pressed the Power button or Standby button.</li><li>Check the volume.</li></ul>
<b>Sound and picture are disturbed</b>	<ul style="list-style-type: none"><li>Try to find the appliance that affects the LCD monitor and keep it away.</li><li>Try plugging the LCD monitor's power plug into another outlet.</li></ul>
<b>The screen cannot be powered on or the power indicator light is off.</b>	<ul style="list-style-type: none"><li>Check whether the power supply is connected.</li><li>Check whether the power supply plug is properly connected.</li><li>Check whether the power outlet has electricity.</li><li>Check whether the AC switch is enabled.</li><li>Press the reset switch and start the system again.</li></ul>
<b>The unit turns off unexpectedly.</b>	<ul style="list-style-type: none"><li>Check whether standby mode is enabled.</li><li>Check if there is a power outage in your area.</li><li>Turn on the display and see if the problem is with the signal and control system.</li></ul>
<b>Remote Control is not working.</b>	<ul style="list-style-type: none"><li>Check whether something is obstructing the display's remote control receiver.</li><li>Check whether the batteries in the remote control are installed correctly.</li><li>Check whether the batteries need to be replaced.</li></ul>
<b>There is no sound when the HDMI in channel is used.</b>	<ul style="list-style-type: none"><li>Remove and insert the HDMI cable again.</li></ul>
<b>The internal PC has no signal.</b>	<ul style="list-style-type: none"><li>Check whether the internal PC is properly inserted in the slot.</li><li>Check whether the internal PC is in shut down mode.</li><li>Press the power button on the internal PC, and manually start up the internal PC.</li></ul>