



4K@60/HDCP 2.2 HDBaseT Extender

HDC-TH100-D/HDC-RH100-D

The IDK HDC-TH100-D/HDC-RH100-D are extender for a long-haul transmission of HDMI signal over one single category cable.

The image quality will not be deteriorated, since video signal is transmitted at a resolution up to 4K@60 without compression.

You can also control external devices that are connected to the HDC-TH100-D/HDC-RH100-D over RS-232C and LAN by registering external control commands.

Input video signal is converted to HDBaseT signal and sent up to 328 ft. (100 m).

■ Specification

Item		HDC-TH100-D (Transmitter)	HDC-RH100-D (Receiver)
Input	1 input	1 input HDMI (*1)/DVI 1.0 TMDS signal link HDCP 1.4/2.2 (Pass-through) (*2) CEC (Pass-through) Connector: Female HDMI Type A (19-pin) (*3)	1 input HDBaseT RS-232C, LAN Connector: RJ-45
	1 output	1 output HDBaseT RS-232C, LAN Connector: RJ-45	1 output HDMI (*1)/DVI 1.0 TMDS signal link HDCP 1.4/2.2 (Pass-through) (*2) CEC (Pass-through) Connector: Female HDMI Type A (19-pin) (*3)
Format		VGA to 4K (*4) 480i / 480p / 576i / 576p / 720p / 1080i / 1080p / 4K (*4)	
Color depth		24 bit, 30 bit, 36 bit Deep Color (*5)	
Dot clock		25 MHz to 600 MHz	
TMDS clock		25 MHz to 340 MHz	
TMDS data rate		0.75 Gbps to 10.2 Gbps	
Plug & Play		Pass-through	
Digital audio input/output		Multi-channel LPCM up to 8 channels Sampling frequency: 32 kHz to 192 kHz, Sample size: 16 bit to 24 bit	
Cable for extension	Cable (*6)	CAT.5E HDC, Cat5e UTP/STP, Cat6 UTP/STP cable	
	Maximum transmission distances (*7)	328 ft. (100 m) (For 4K format, CAT.5E HDC, Cat5e STP, or Cat6 STP cable is used) 492 ft. (150 m) (Long reach mode is used)	
External control	RS-232C	1 port/male D-sub (9 pin), full duplex, up to 115.2 kbps	
	LAN	1 port/RJ-45 10Base-T/100Base-TX (Auto Negotiation), Auto MDI/MDI-X	
General	Power	DC 5 V 0.8 A	DC 5 V 1.4 A
	Power consumption	About 4 W	About 7 W
	Dimensions	4.2 (W) × 1.1 (H) × 3.9 (D)" (106 (W) × 27.5 (H) × 100 (D) mm) (Quarter rack wide, thin type) (Excluding connectors and the like)	
	Weight	0.4 lbs. (0.2 kg)	
	Temperature	Operating : 32°F to 104°F (0°C to +40°C) Storage : -4°F to +176°F (-20°C to +80°C)	
	Humidity	Operating/Storage: 20% to 90% (Non Condensing)	

*1 HEC and ARC are not supported.

*2 To transmit those signals, use an IDK's HDBaseT product supporting DVI signals.

If DVI signals with HDCP is sent from the source device, video may not be output to the sink device. Please check the operation beforehand.

*3 Use 16 ft. (5 m) or shorter HDMI cables.

For 4K format, use an 18-Gbps high speed cable.

*4 For 4K format, 24 Hz/25 Hz/30 Hz/50 Hz (4:2:0)/59.94 Hz (4:2:0) are supported.

*5 For 4K format, the following color depths are supported.

• 24 Hz/25 Hz/30 Hz : 4 bit (RGB, YCbCr 4:4:4)

: 24 bit, 30 bit, 36 bit (YCbCr 4:2:2)

• 50 Hz/59.94 Hz/60 Hz : 24 bit (YCbCr 4:2:0)


*6 T568A or T568B straight. The CAT.5E HDC cable is developed by IDK and recommended by HDBaseT alliance.

*7 The maximum transmission distance was obtained when IDK's CAT.5E HDC cable was used. The distance may not be extended with some device combinations, cabling method, or other manufacturer's cable. Video may be disturbed or may not be output even if signals are within the range mentioned above. Operations may not be stable with some LCD devices; please check the operation beforehand or contact us.

The maximum transmission distance is the shorter distance of connected HDBaseT product or sink device's maximum transmission distance.

Up to 492 ft. (150 m): 1080p (24 bit) in Long reach mode. For Long reach mode, use IDK's HDBaseT products that supports 328 ft. (100 m) or longer.

■ Front & Rear Panels

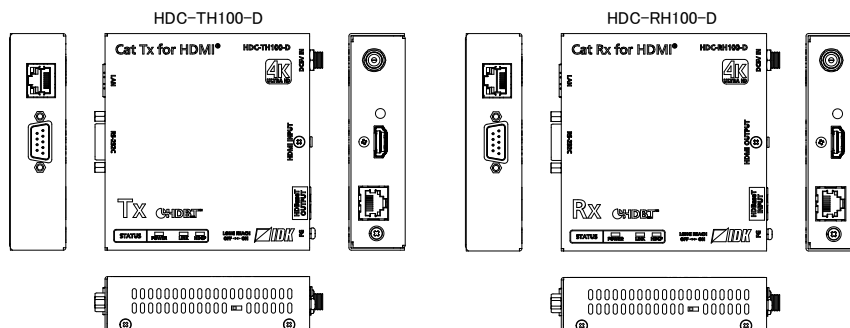


●All specifications and drawings are subject to change without notice. ●Please do not use the supplied AC adapter and power supply cable for other products. ●The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries. ●HDBaseT™ and the HDBaseT Alliance Logo are trademarks of the HDBaseT Alliance. ●All other company and product names mentioned in this document are either registered trademarks or trademarks of their respective owners. In this document, the "®" or "™" marks may not be specified. ●©2018 IDK Corporation, all rights reserved.



4K@60/ HDCP 2.2 HDBaseT Extender HDC-TH100-D/HDC-RH100-D

■ Application Example

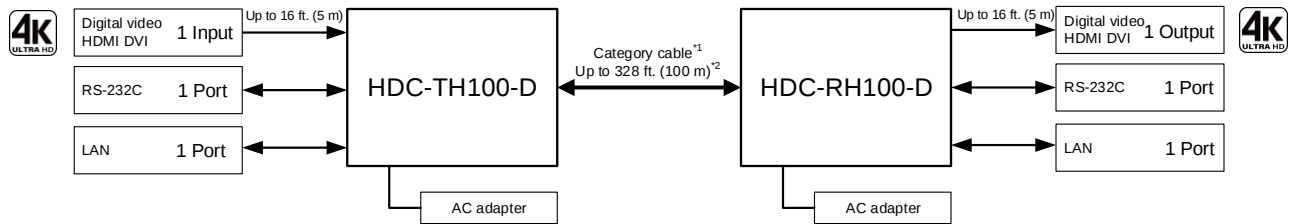

*1 For Transmission distance longer than 164 ft. (50 m), CAT.5E HDC, Cat5e STP or Cat6 UTP/STP cables are recommended.
For 4K format longer than 230 ft. (70 m), CAT.5E HDC/Cat5e STP or Cat6 STP cables are recommended.

For Long reach model longer than 328 ft. (100 m), CAT.5E HDC/Cat5e STP or Cat6 STP cables are recommended.

*2 Maximum transmission distance:

The mentioned maximum value was obtained when IDK's CAT.5E HDC cable was used.

The distance can be up to 492 ft. (150 m) with Long reach mode supporting 1080p (24 bit). For Long reach mode, use HDC-TH100-D/HDC-RH100-D/IDK's HDBaseT products that support 328 ft. (100 m).

[Features]

■ Video

- Up to 4K@60 (4:2:0)
- HDCP 1.4/2.2 (Pass-through)
- Up to 328 ft. (100 m) 4K@60 over CAT.5E HDC/Cat5e STP/Cat6 STP cable
- Transmission over Cat5e UTP cable^{*1}
- Up to 328 ft. (100 m) over Cat6 UTP cable^{*2}
- Up to 492 ft. (150 m) in Long reach mode (1080p 60 Hz 24 bit or less)^{*3}
- No actual extension delay (10 μs or less/328 ft. (100 m))

■ Others

- CEC (Pass-through)
- AC adapter with locking mechanism
- Up to 4 units can be installed in a 1U rack

*1 For transmission distance longer than 164 ft. (50 m), CAT.5E HDC, Cat5e STP or Cat6 UTP/STP cables are recommended.

*2 For 4K format longer than 230 ft. (70 m), CAT.5E HDC/Cat5e STP or Cat6 STP cables are recommended.

*3 For Long reach mode 328 ft. (100 m) or longer (up to 492 ft. (150 m)), CAT.5E HDC/Cat5e STP or Cat6 STP cables are recommended. Use HDC-TH100-D/HDC-RH100-D/IDK's HDBaseT products that support 328 ft. (100 m).