



# MSR Gold™ FastFit

## MSR Gold™ 1500 FastFit 1CT/4

All lamps burn out eventually, but when this happens with single ended MSR Gold™ FastFit, it is replaced in seconds – thanks to the specially designed lamp base and lamp holder. This lamp provides a high beam intensity of pure, white light for a truly illuminating performance, while the gold-plated caps provide superior heat protection and prevent premature failure. P3 technology allows use in any position and at higher temperatures, further extending lamp life and consistency of high-quality light output. Also, because the FastFit design is applied to Philips Halogen lamps, switching between lamp technologies can be done quickly and easily. The Philips MSR Gold<sup>TM</sup> 1200 FastFit can be operated in a lamp wattage range between 800W and 1400W.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury.
- Manage in Accord with Disposal Laws.
- See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-800-555-0050

### Product data


General Information		Luminous Efficacy (rated) (Nom)	
Cap-Base	PGJX50	80 lm/W	
Operating Position	UNIVERSAL [Any or Universal (U)]	Color rendering index (CRI)	
Life to 50% Failures (Nom)	750 hour(s)	80	
Light Technical		Arc Length O (Nom)	
Luminous Flux	119,550 lm	6.3 mm	
Chromaticity Coordinate X (Nom)	323	Operating and Electrical	
Chromaticity Coordinate Y (Nom)	333	Power Consumption	
Correlated Color Temperature (Nom)	6000 K	1,500 W	
		Lamp Current (Nom)	
		15.3 A	

MSR Gold™ FastFit

Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Net Weight (Piece)	0.289 lb
Approval and Application	
CE mark	Yes
Product Data	
Order product name	MSR Gold 1500 FastFit 1CT/4


Full product name	MSR Gold™ 1500 FastFit 1CT/4
Full product code	871829122134000
Order code	286971
Material Nr. (12NC)	928107305115
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718291221340
Numerator - Packs per outer box	4
EAN/UPC - Case	8718291221357

Dimensional drawing



Product	D (max)	O	L (min)	L (max)	L	C (max)	F
MSR Gold 1500 FastFit 1CT/4	1-1/8 inch	1/4 inch	2-9/16 inch	2-5/8 inch	2-9/16 inch	5-1/16 inch	2 inch

Photometric data

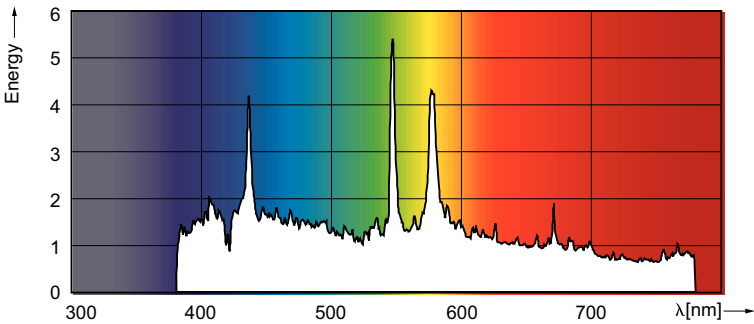

Spectral Power Distribution Colour - MSR Gold 1500 FastFit 1CT/4

