



MSR Gold™ FastFit

MSR Gold 700 FastFit 1CT/4

All lamps burn out eventually, but when this happens with single ended MSR Gold™ FastFit, it is replaced in seconds – thanks to the specially designed lamp base and lamp holder. This lamp provides a high beam intensity of pure, white light for a truly illuminating performance, while the gold-plated caps provide superior heat protection and prevent premature failure. P3 technology allows use in any position and at higher temperatures, further extending lamp life and consistency of high-quality light output. Also, because the FastFit design is applied to Philips Halogen lamps, switching between lamp technologies can be done quickly and easily. The Philips MSR Gold™ FastFit can be operated in a lamp wattage range between 700W and 2500W.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information		Arc Length O (Nom)	3.8 mm
Cap-Base	PGJX50		
Operating Position	UNIVERSAL [Any or Universal (U)]		
Life to 50% Failures (Nom)	750 hour(s)		
Light Technical			
Luminous Flux	54,000 lm		
Chromaticity Coordinate X (Nom)	327		
Chromaticity Coordinate Y (Nom)	336		
Correlated Color Temperature (Nom)	6000 K		
Luminous Efficacy (rated) (Nom)	76 lm/W		
Color rendering index (CRI)	79		
Operating and Electrical			
Power Consumption	700 W		
Lamp Current (Nom)	10.2 A		
Controls and Dimming			
Dimmable	Yes		
Mechanical and Housing			
Net Weight (Piece)	0.100 kg		

MSR Gold™ FastFit

Product Data

Order product name	MSR Gold 700 FastFit 1CT/4
Full product name	MSR Gold 700 FastFit 1CT/4
Full product code	871829122119700
Order code	928106005115
Material Nr. (12NC)	928106005115

Numerator - Quantity Per Pack

1

EAN/UPC - Product/Case

8718291221197


Numerator - Packs per outer box

4

EAN/UPC - Case


8718291221203

Dimensional drawing



Product	D (max)	O	L (min)	L (max)	L	C (max)	F
MSR Gold 700 FastFit	23.2 mm	3.8 mm	64 mm	66 mm	65 mm	112 mm	50 mm
1CT/4							

Photometric data

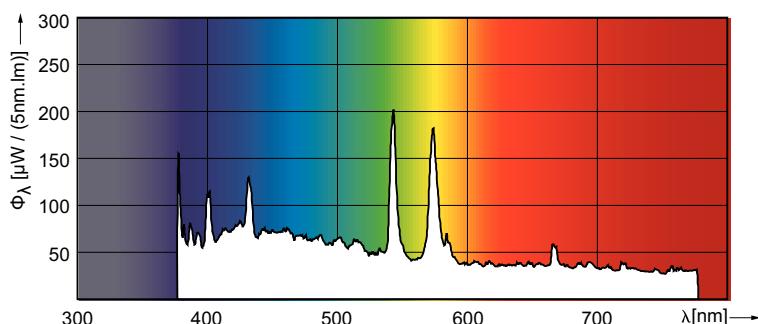

Spectral Power Distribution Colour - MSR Gold 700 FastFit 1CT/4

