

# PROTECH LED

be creative



## LED STRIP SPECIFICATION

AT-DTW-1





## AT-DTW-1

### DESCRIPTION


- 2216 SMD LED technology
- 224 PCS of 2216 Chip LEDs
- High CRI +90
- Dim from Warm White 3000K to WarmWhite 1800K
- Dim by Triac, 0/1-10V, DALI, PWM constant voltage dimmable drive



### DIMENSIONS & WATERPROOF

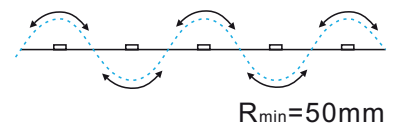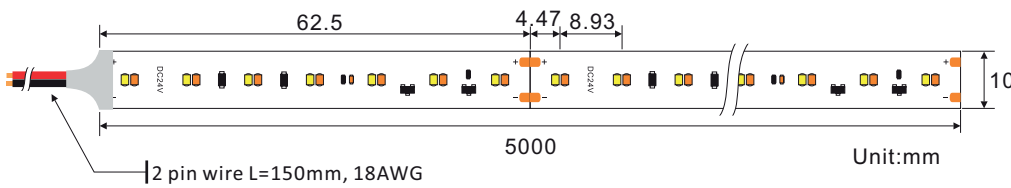

24V only:




### PRODUCT SPECIFICATION

Dimension	5000 x 10 x 1.2mm
Chip Type	2216SMD
Chip Density	224 LEDs/m
Step LEDs	14 LEDs
Step Length	62.5 mm

Voltage (V)	DC24V
Current (A/m)	0.75 A
Power (W/m)	18 W (Full Brightness)
Lumen (lm/m)	1389 lm (Full Brightness)
Beam Angle	120°
Operation Temperature	-20°C~50°C


### CCT CURVE

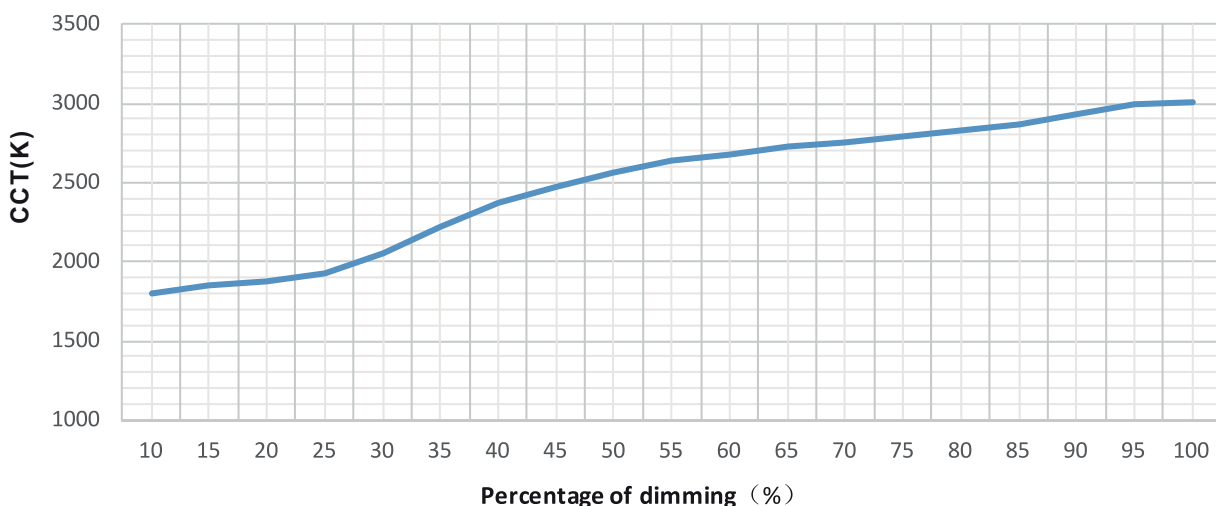



**AT-DTW-1**

**LUMINANCE CURVE**

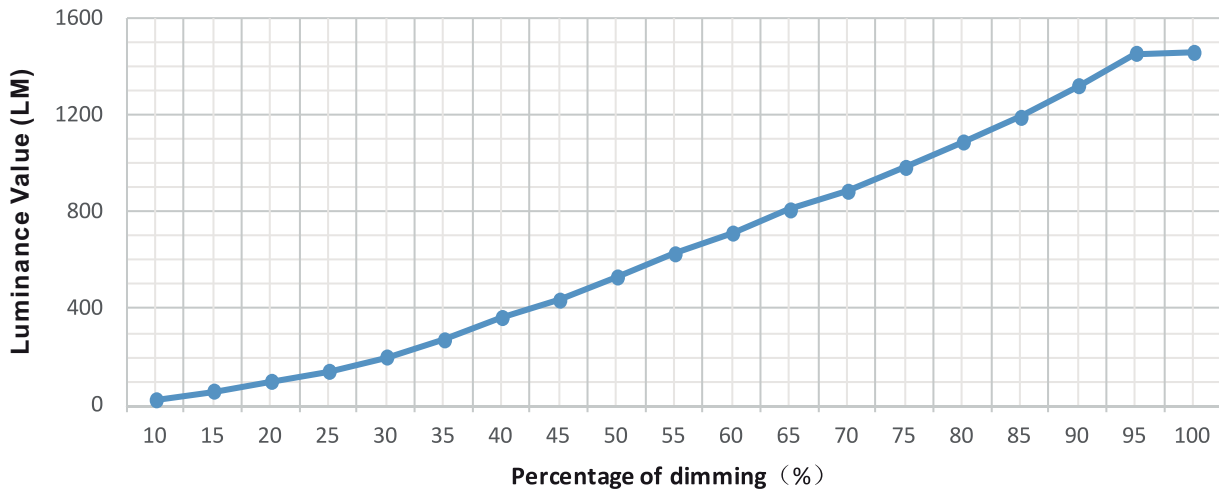

**WIRING DIAGRAM**

