

# **Bright Xled HD**

The Xled HD provides very deep and powerful colors, with 12x12W RGBWAUV LED's. It is suitable for small and medium-sized venues. Perfect for color washing and decorative lighting.

Designed for quick and easy mounting. Passive cooling, no fan noise.



Product code: 666817

Product Name: Bright Xled HD 12x12W RGBWAUV True1 Xline







- Flicker free high speed PWM 16-bit dimming
- 30° Even field optics
- Industry standard 5pin XLR and PowerCon
- Inputs and outputs for easy daisy-chaining.
- RDM remote addressing
- DMX controlled rise-time
- Easy and intuitive Local menu structure.
- Firmware cloning from fixture to fixture via DMX
- Intelligent yoke-design enables direct floor-mount without removal of hook clamp.
- Stealth design: All black parts, (body, yoke, hook clamp & bolt),
- · Automatic dimming of LCD backlight.
- Compact size, low weight and power consumption












## **TECHNICAL SPECIFICATIONS**

- Input voltage: 100V-240V AC, 50 / 60Hz
- Power consumption: 120W
- Light source: 12 pcs 12 W RGBWAUV LED
- Power connection: Neutrik® True1 in and out
- LED Lifespan: 50,000 hours
- Lux: 3150 lux on @ 2.0m RGBWAUV fully on
- Spread: 30 °
- · RDM
- PWM: 2.940Hz
- Dimmer: 0-100% dimmer (Smooth electronic dimming with 16-bit)
- Strobe: 1 30 Hz

#### **TECHNICAL SPECIFICATIONS**

- Control:DMX512,5-pinXLRin/out,2/3/1ochannel mode
- 4-button LCD display control panel
- Die-cast Aluminum housing
- Smart cooling without fans
- Software upgrade via DMX.
- Net weight: 3.2 Kg
- Exterior dimensions: 263x293x98mm
- Compliance:
- LVD: EN60598-2-17:1989+A2:1991
- EN60598-1:2008+A11:2009
- EMC: EN55015:2006+A1:2007+A2:2009
- · EN61547:2009
- EN61000-3-2:2006+A12009+A2:2009
- EN61000-3-3:2008

# **PHOTOMETRICS**

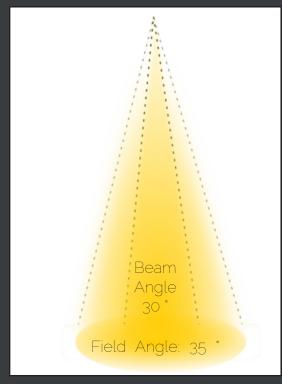

Lux	R	G	В	W	А	UV	ALL
1M	2520	3175	2308	4524	1751	801	12800
2M	638	825	603	1320	462	217	3150
3M	298	376	268	679	212	97	1350
4M	171	209	153	324	119	55	760
5M	105	128	86	199	76	33	505

### **INCLUDED ITEMS**

831271 Hybrid cable PowerConTrue1/DMX XLR5P 1m

666615 Bright HOOK CLAMP, black, SWL 75kg, TüV approved

# **ACCESSORIES**

Hybrid cables

674030 Hybrid cable PowerConTrue1/DMX XLR5P 1m
674041 Hybrid cable PowerConTrue1/DMX XLR5P 2m
674052 Hybrid cable PowerConTrue1/DMX XLR5P 3m
674063 Hybrid cable PowerConTrue1/DMX XLR5P 5m
674074 Hybrid cable PowerConTrue1/DMX XLR5P 1om

671521 Safety cable 70cm, 3mm wire black

671521 Bright Xled Barndoor Xline

**Flightcases** 

Norway

666862 Bright Xled Flightcase 80x60x45 for 10 Xled Xline

